
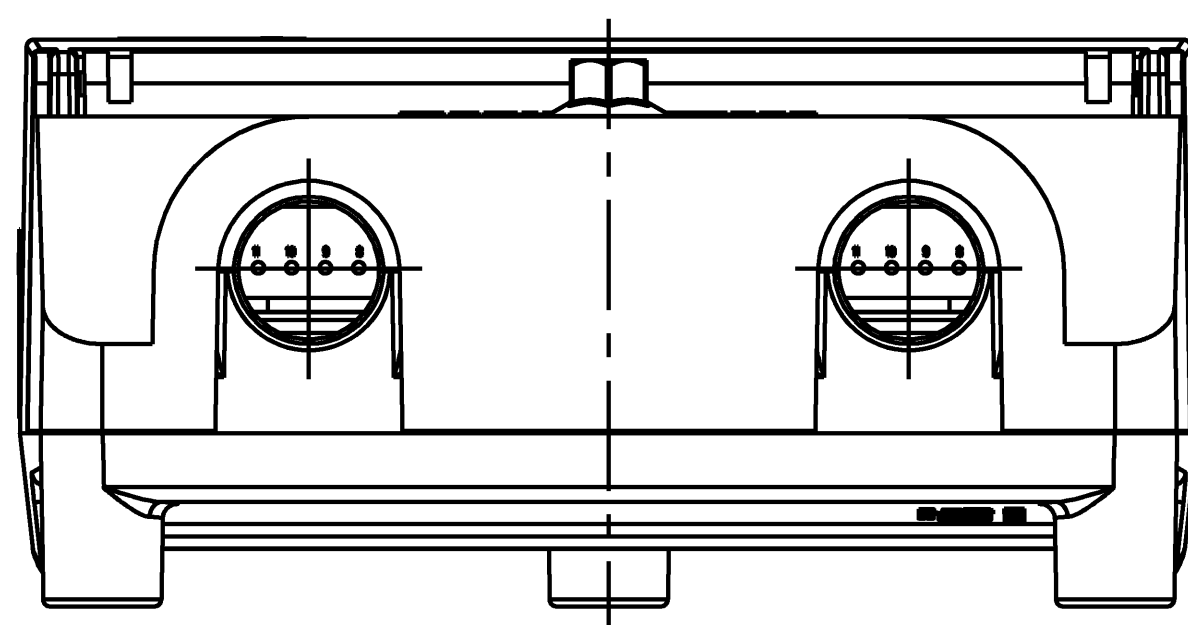
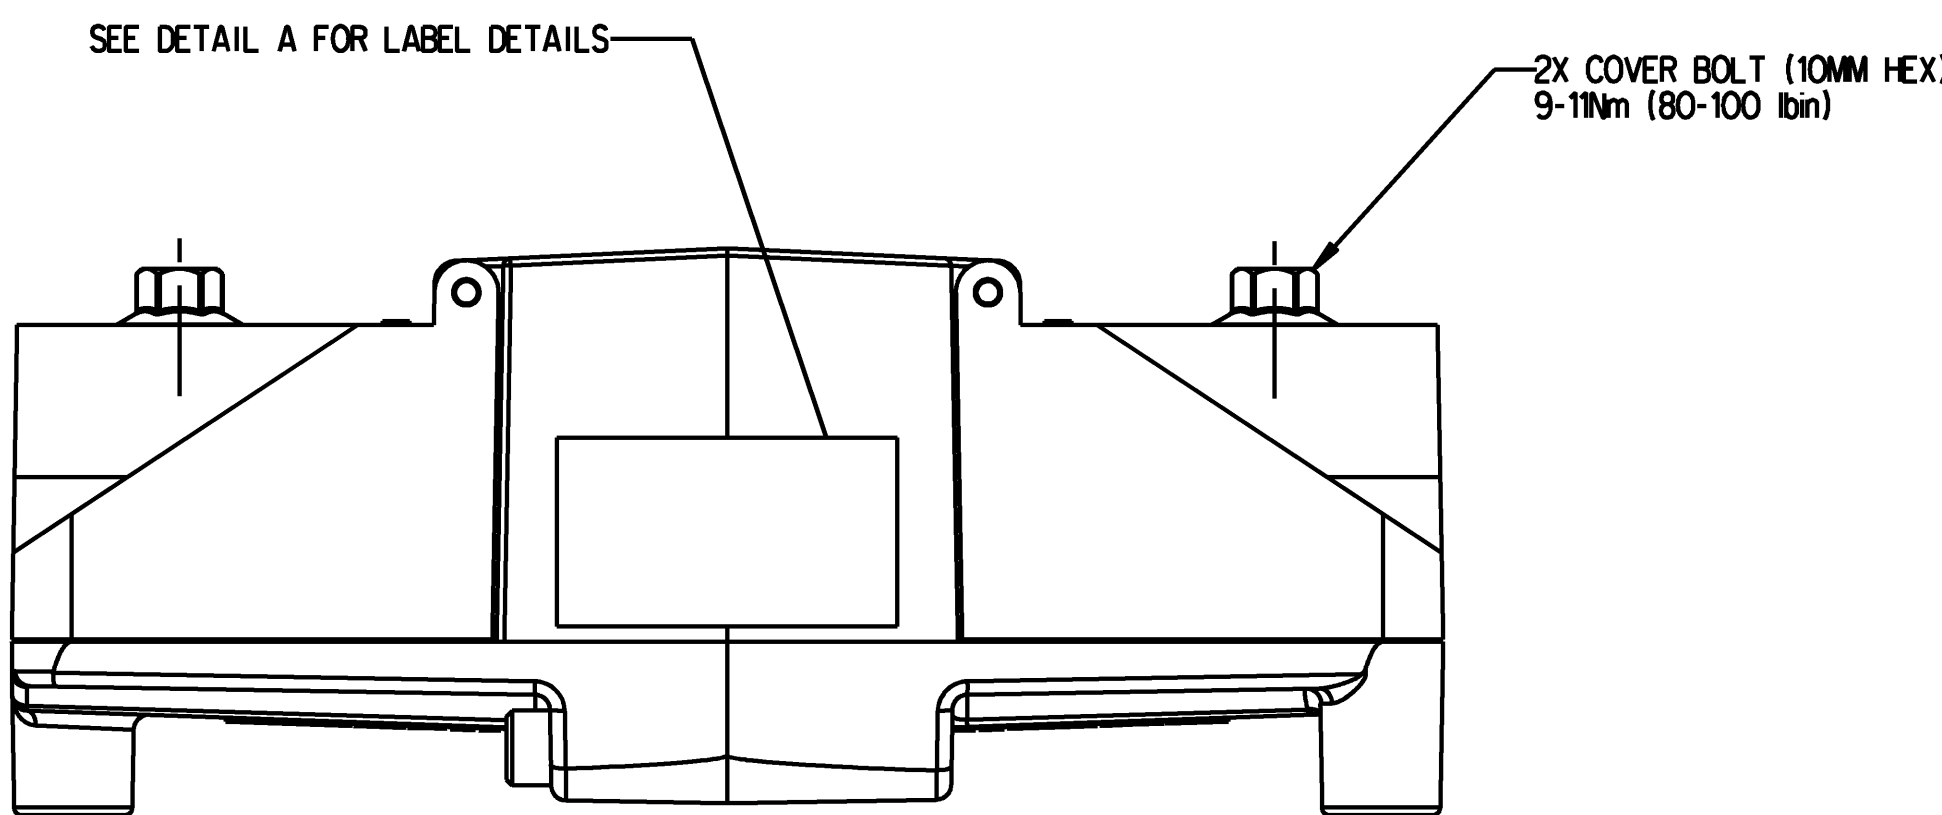
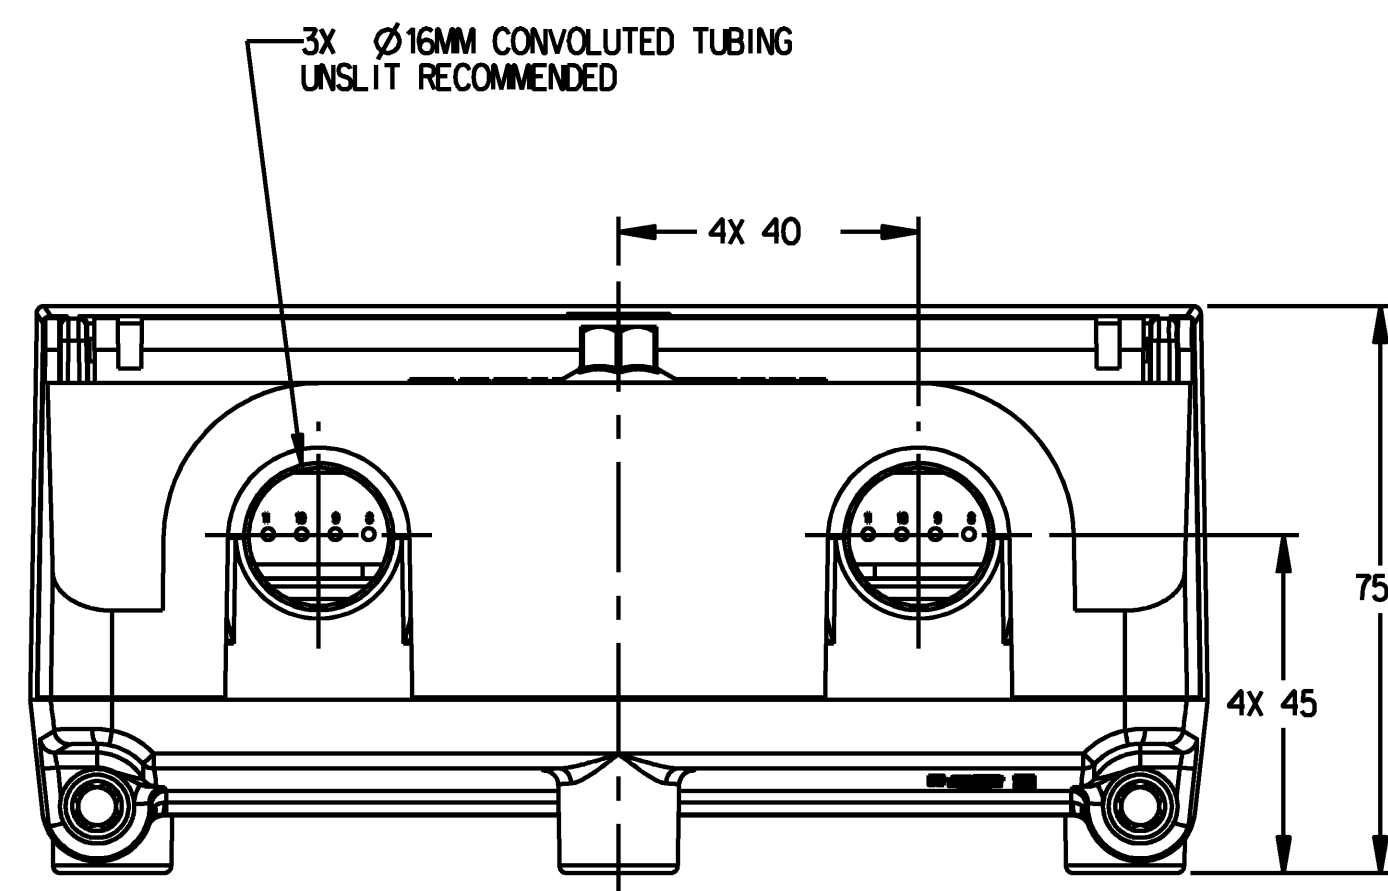
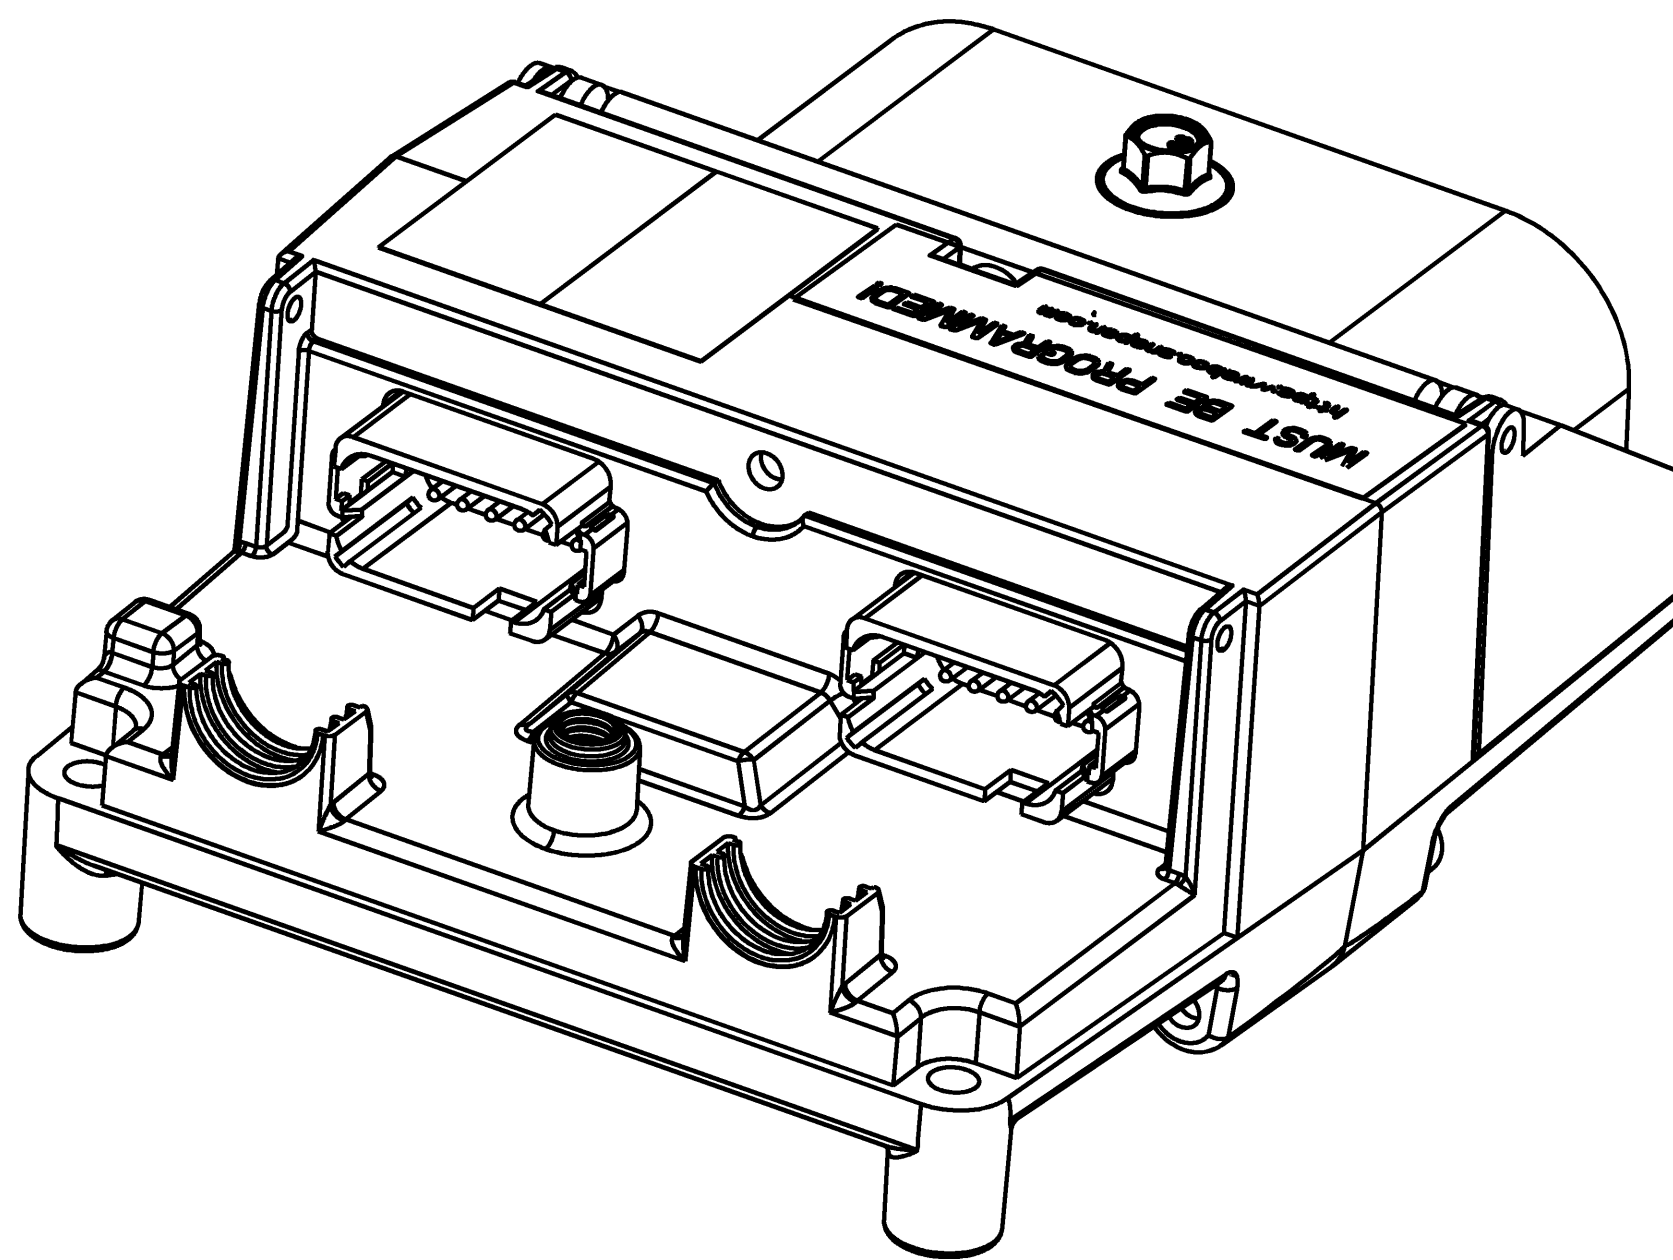
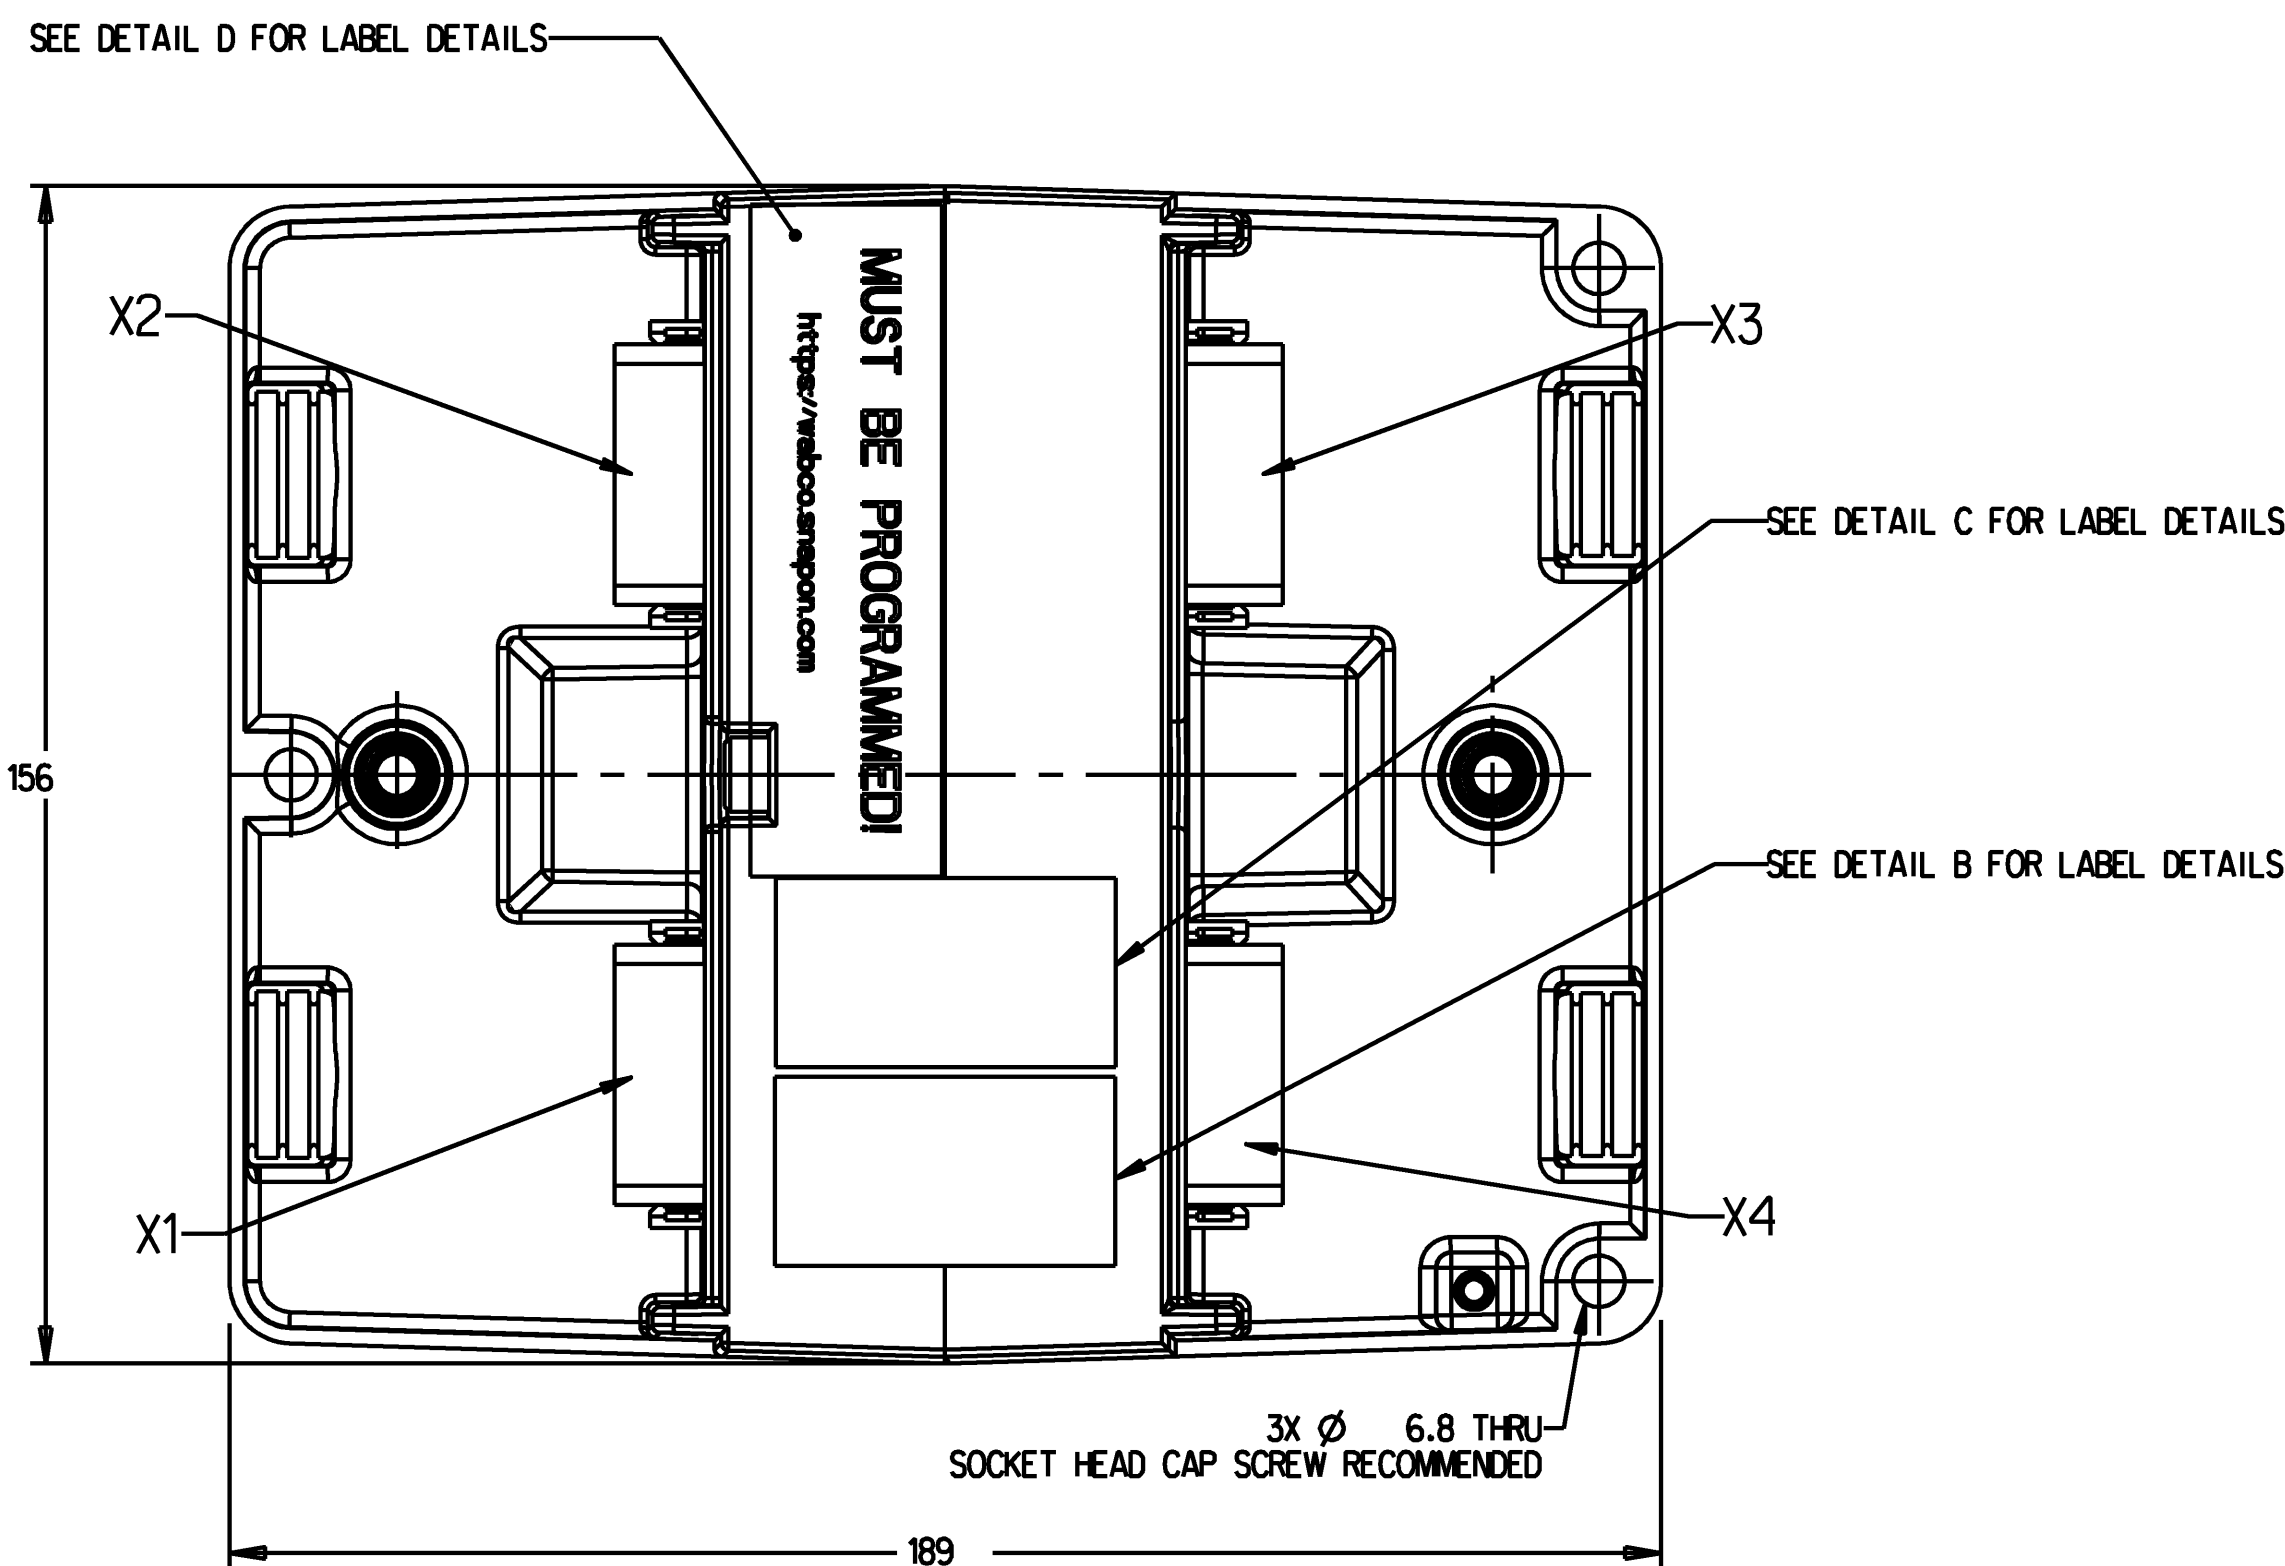


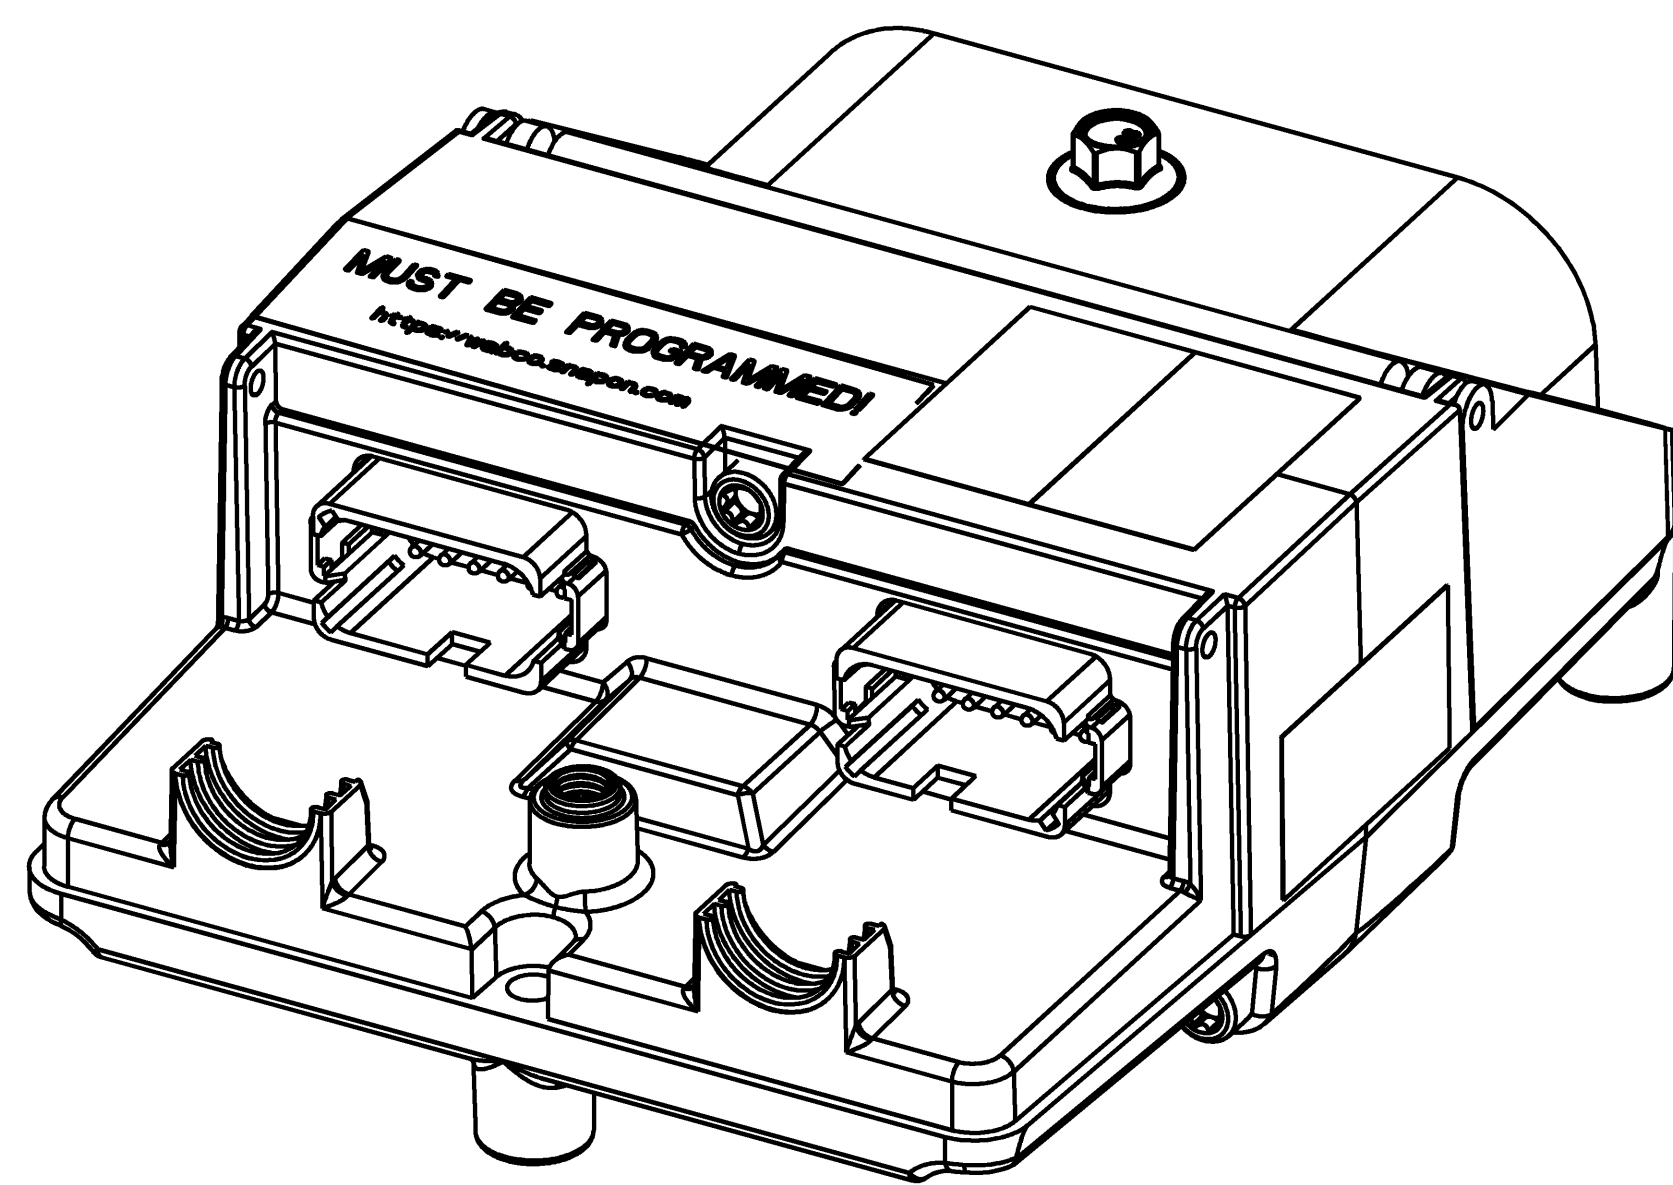


ITEM	CONNECTOR X2 FRONT
1	TRAILER 3/2 VALVE
2	LEFT FRONT ABS VALVE INLET
3	RIGHT FRONT ABS VALVE OUTLET
4	RIGHT FRONT ABS VALVE INLET
5	RIGHT FRONT SENSOR
6	RIGHT FRONT SENSOR
7	LEFT FRONT SENSOR
8	LEFT FRONT SENSOR
9	RIGHT FRONT ABS VALVE COMMON
10	LEFT FRONT ABS VALVE OUTLET
11	LEFT FRONT ABS VALVE COMMON
12	TRAILER 3/2 VALVE GROUND
MATING CONNECTOR: DUETSCH PART NUMBER: DT06-12SC-B016 (BLACK)	

ITEM	CONNECTOR X1 CAB
1	+12V IGNITION/BATTERY
2	+12V IGNITION
3	ATC LAMP/ATC SWITCH
4	UISB7 AL(+)
5	RETARDER RELAY (CONTROL)
6	UI939 CAN-H
7	UI939 CAN-H
8	TRAILER WARNING LAMP
9	UISB7 BL(-)
10	BLINKCODE SWITCH/ABS LAMP CONTROL
11	GROUND
12	GROUND
MATING CONNECTOR: DUETSCH PART NUMBER: DT06-12SA-B016 (GRAY)	


ITEM	CONNECTOR X4 3RD AXLE
1	ABS SWITCH
2	NOT USED
3	THIRD AXLE LEFT SENSOR
4	THIRD AXLE LEFT SENSOR
5	THIRD AXLE RIGHT SENSOR
6	THIRD AXLE RIGHT SENSOR
7	THIRD AXLE RIGHT ABS VALVE OUTLET
8	THIRD AXLE RIGHT ABS VALVE COMMON
9	THIRD AXLE RIGHT ABS VALVE INLET
10	THIRD AXLE LEFT ABS VALVE OUTLET
11	THIRD AXLE LEFT ABS VALVE COMMON
12	THIRD AXLE LEFT ABS VALVE INLET
MATING CONNECTOR: DUETSCH PART NUMBER: DT06-12SD-B016 (BROWN)	
***PINS 7 THRU 12 ONLY USED IN 656M APPLICATIONS	

ITEM	CONNECTOR X3 REAR
1	LEFT REAR SENSOR
2	LEFT REAR SENSOR
3	RIGHT REAR SENSOR
4	RIGHT REAR SENSOR
5	REAR AXLE 3/2 VALVE
6	REAR AXLE 3/2 VALVE GROUND
7	RIGHT REAR ABS VALVE OUTLET
8	RIGHT REAR ABS VALVE COMMON
9	RIGHT REAR ABS VALVE INLET
10	LEFT REAR ABS VALVE OUTLET
11	LEFT REAR ABS VALVE COMMON
12	LEFT REAR ABS VALVE INLET
MATING CONNECTOR: DUETSCH PART NUMBER: DT06-12SC-B016 (GREEN)	

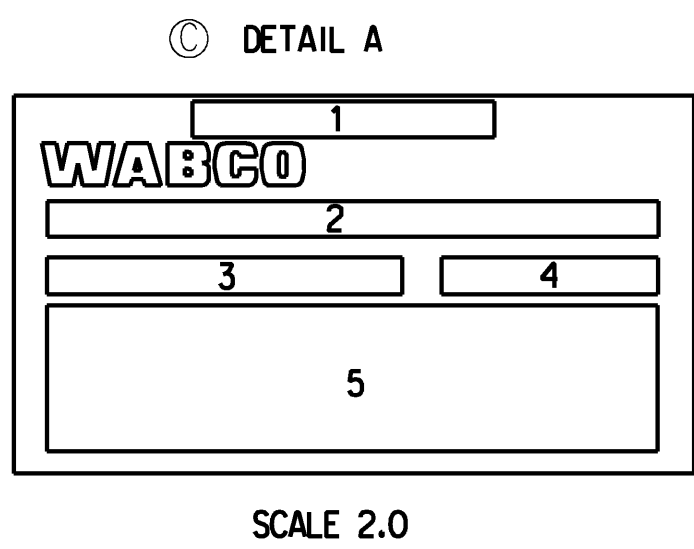


ITEM	DESCRIPTION
5	BAR CODE
4	SERIAL NUMBER
3	WABCO PART NUMBER
2	DESCRIPTION
1	COUNTRY OF ORIGIN

SCALE 2.0

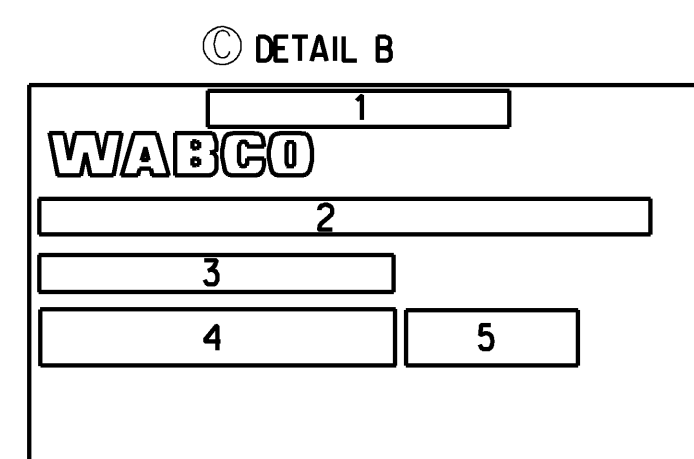


ITEM	DESCRIPTION
5	CUSTOMER PART NUMBER
4	DESCRIPTION
3	WABCO PART NUMBER
2	DESCRIPTION
1	COUNTRY OF ORIGIN

SCALE 2.0

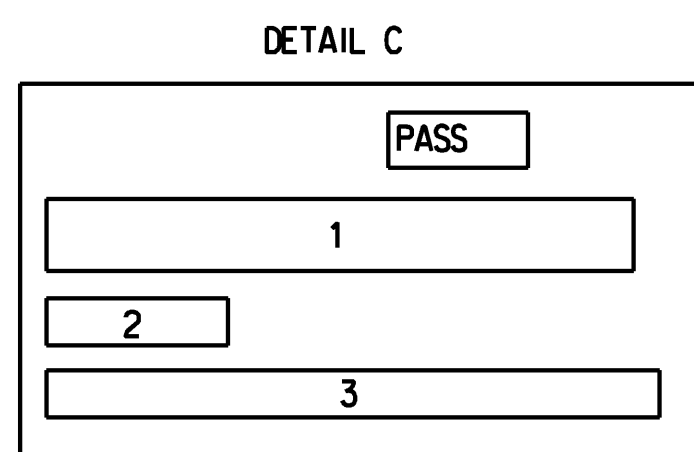

ITEM	DESCRIPTION
3	DATE AND TIME
2	SERIAL NUMBER
1	WABCO PART NUMBER

SCALE 2.0

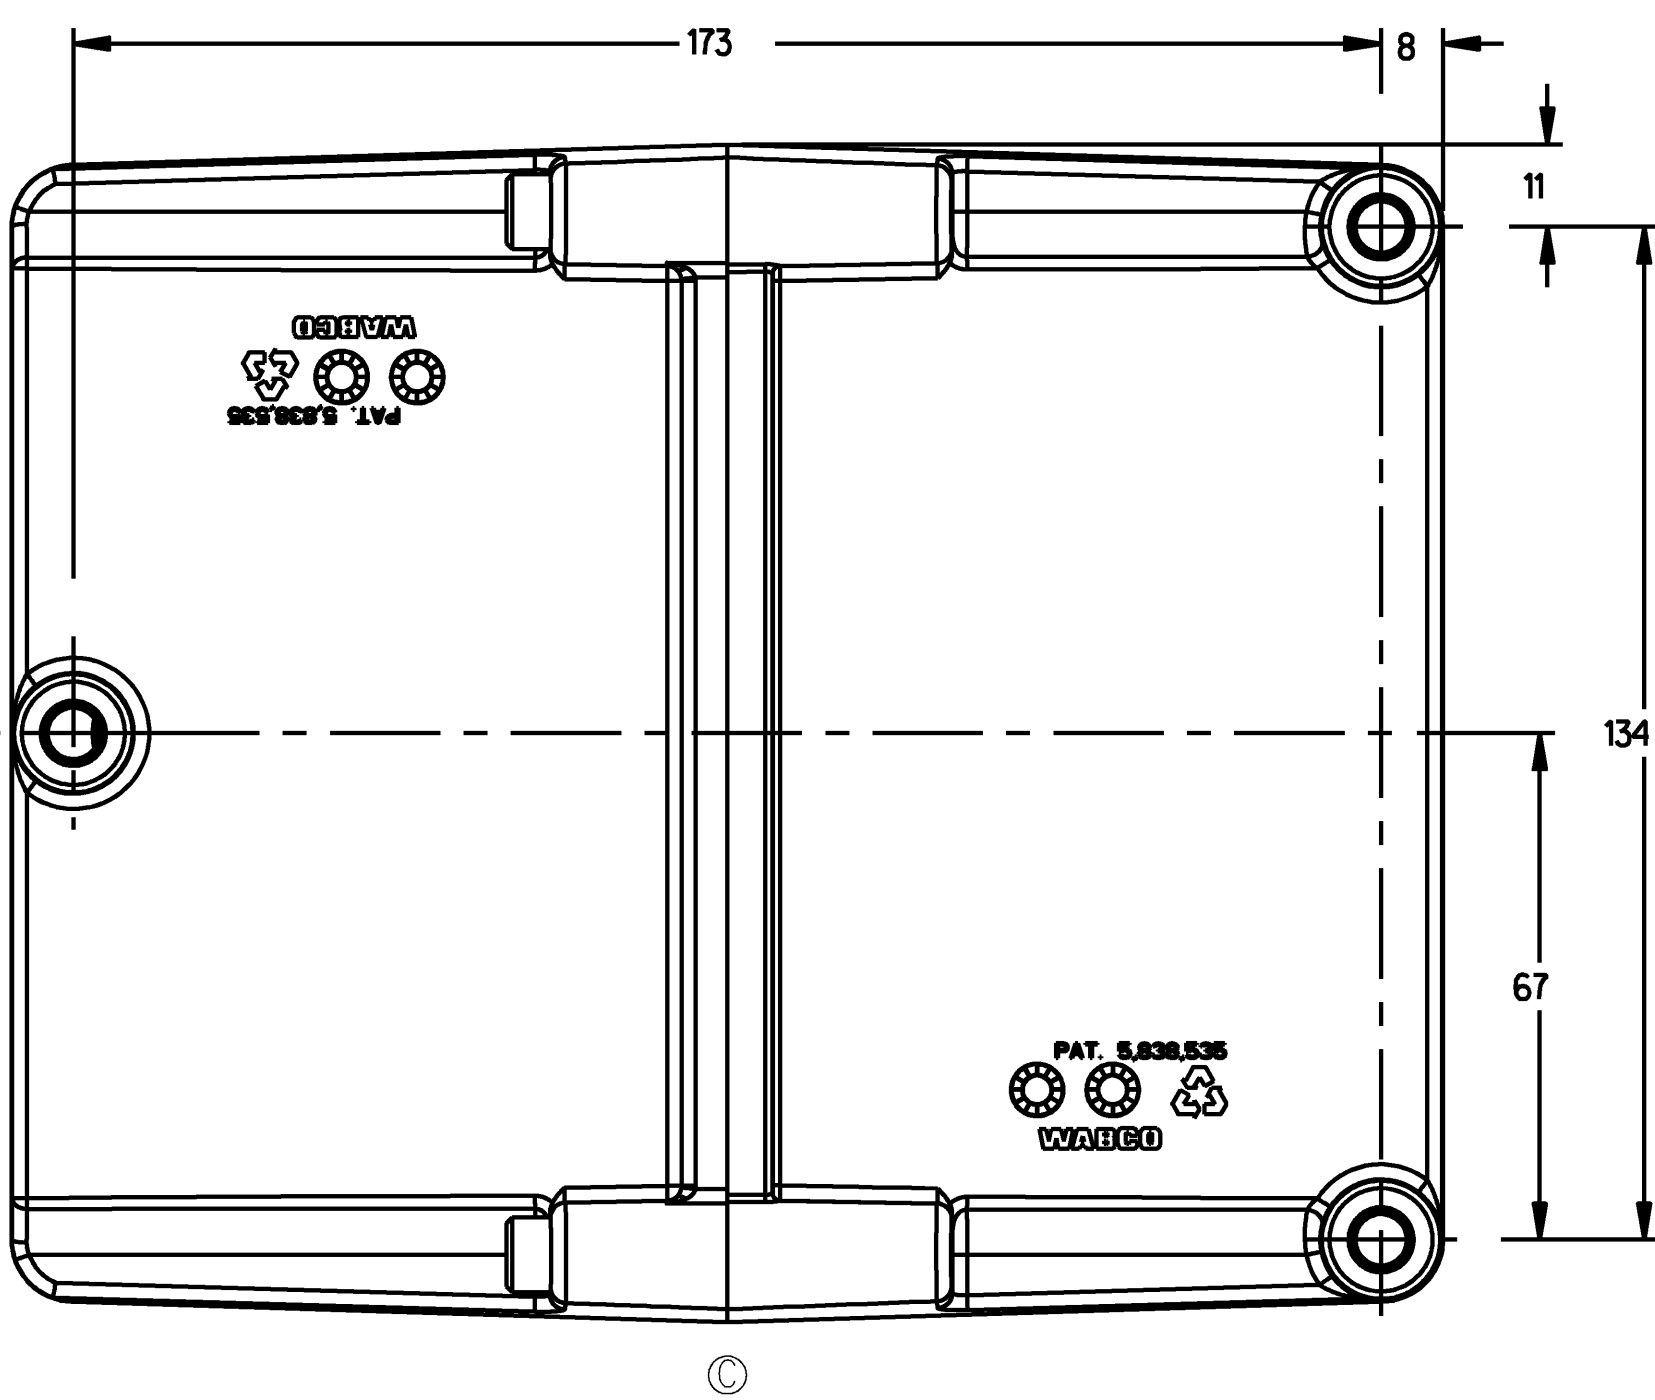

DETAIL D

MUST BE PROGRAMMED!

https://wabco.snapon.com

SCALE 2.0

NOTE:
"MUST BE PROGRAMMED" ALONG WITH WEB ADDRESS FOR PROGRAMMING
SHALL BE VISIBLE AND CENTERED ON LABEL.

NOTES:

- VOLTAGE: 12V±25%
- THERMAL RANGE OF APPLICATION: -40 TO +75°C
- STORAGE TEMPERATURE: -40 TO +90°C
- SOME VIEWS SHOWN WITHOUT COVER ASSEMBLIES FOR CLARITY
- SOFTWARE VERSION: E48

PART NUMBER	CUSTOMER P/N	DESCRIPTION	NOTE
400 860 914 0	-	PABS ECU E4F 12V 454M ATC PLC	
400 860 915 0	-	PABS ECU E4F 12V 656M PLC WITH ATC OPTION	
400 860 912 0	-	PABS ECU E4F 12V 654M PLC WITH ATC OPTION	
400 860 004 0	-	PABS ECU E4F 12V 454M ATC PLC	
400 860 003 0	-	PABS ECU E4F 12V 656M PLC WITH ATC OPTION	
400 860 002 0	-	PABS ECU E4F 12V 654M PLC WITH ATC OPTION	

FOR FURTHER TECHNICAL DATA
SEE PRODUCT SPECIFICATION 035

General Specifications: 4E3-534-1, Size 150 1440S PLP				Copyright WABCO®		WABCO®			
Further Technical Data				Date	Signature	PABS ECU E4C 12V TABLE DRAWING			
Doc. Code				Drawn	Checked	053 EN 1/1			
General Tolerances: ISO 2013				2019-08-09		053 EN 1/1			
Range of Nominal Dimensions (± mm)				2019-08-09		053 EN 1/1			
Drawn				1:1		053 EN 1/1			
Medium				1:1		053 EN 1/1			
Scale				1:1		053 EN 1/1			
Drawn				1:1		053 EN 1/1			
Trapped holes out.				1:1		053 EN 1/1			
1) Tolerances Class Applied Unspecified				1:1		053 EN 1/1			