


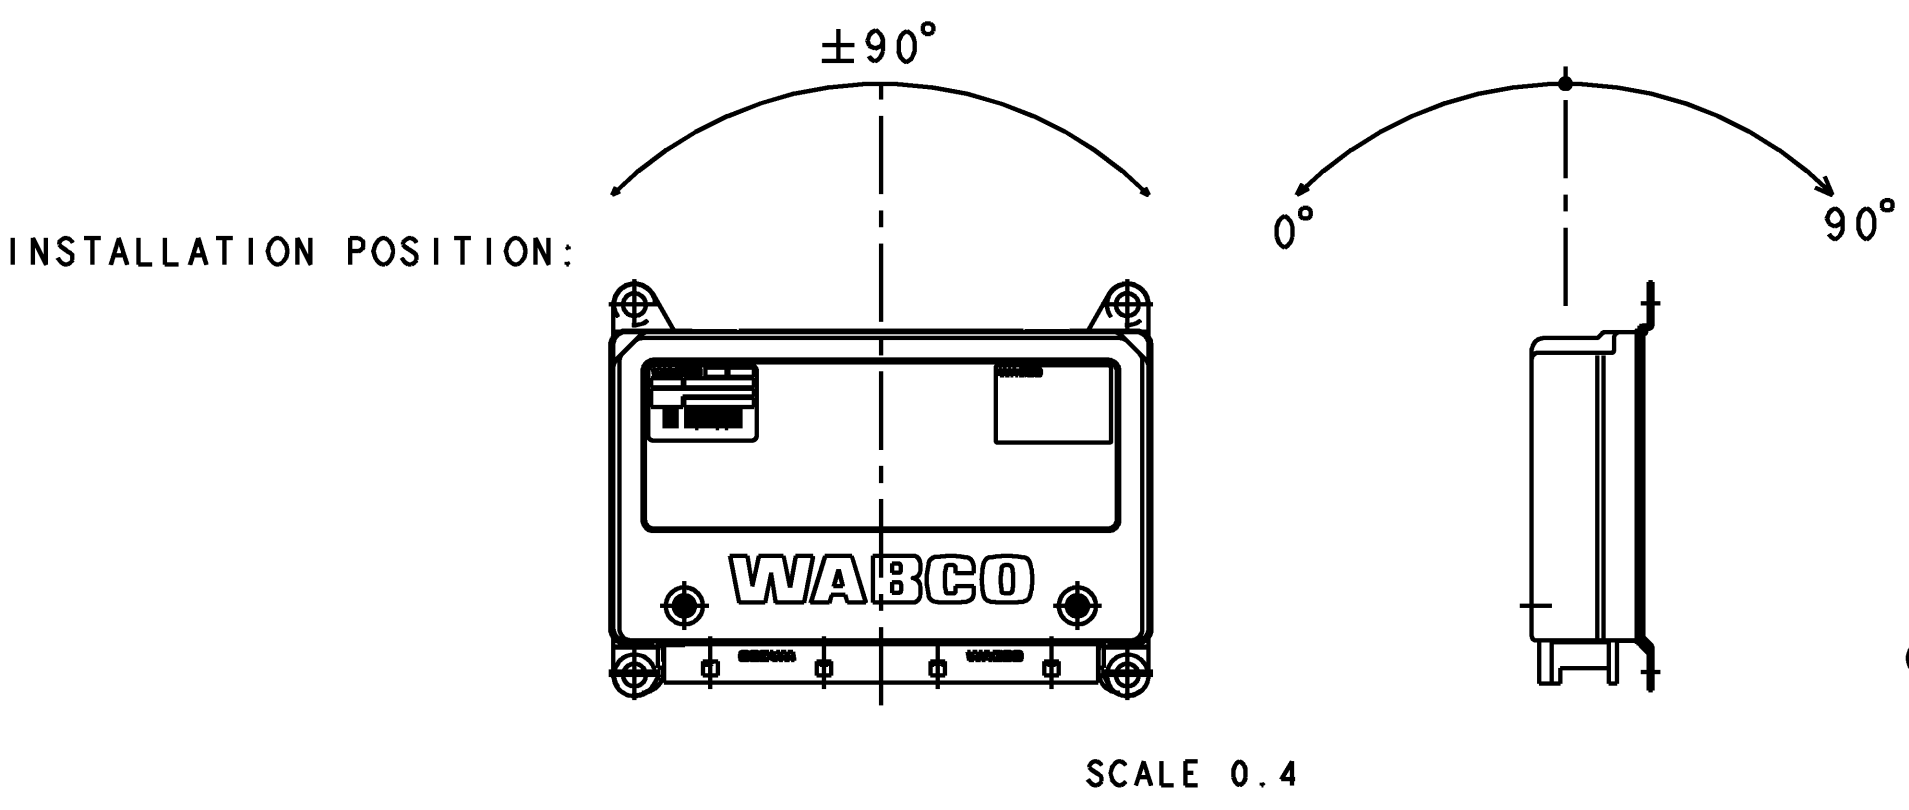

MALE MULTIPOINT CONNECTOR: SURFACE PROTECTION:  
MESSERLEISTE: OBERFLÄCHENSCHUTZ:  
CONNECTEUR MALE MULTIBROCHE: PROTECTION DE SURFACE:  
SPINE MULTIPA: PROTEZIONE SUPERFICIALE:

TINNED  
VERZINNT  
ETAME  
STAGNATO

SERIAL NUMBER GREATER THAN:  
① FORTSCHRITZAHL GROESSER ALS: 0  
NUMERO DE SERIE PLUS GRAND QUE:  
NUMERO DI SERIE PIU GRANDE:

PRODUCTION PLACE:  
② PRODUKTIONSSTAETTE: JED-225  
LIEU DE FABRICATION:  
LUOGO DI FABBRICAZIONE:

DATE OF MANUFACTURE:  
③ HERSTELLDATUM: JED-226  
DATE DE FABRICATION:  
DATA DI FABBRICAZIONE:

COUNTRY OF ORIGIN:  
④ URSPRUNGSLAND: JED-225  
PAYS D'ORIGINE:  
PAESE D'ORIGINE:

CUSTOMER LABEL:  
⑤ KUNDENAUFKLEBER: OPTIONAL  
ETIQUETTE ADHESIVE DU CLIENT: A VOLONTE  
ETICHETTA ADESIVA DEL CLIENTE: A SCELTA

FOR FURTHER TECHNICAL DATA SEE PRODUCT SPECIFICATION  
WEITERE TECHNISCHE DATEN SIEHE PRODUKTSPEZIFIKATION  
POUR INFORMATION COMPLEMENTAIRES VOIR LES SPECIFICATIONS DU PRODUIT  
PER INFORMAZIONI ULTERIORI VEDI LA SPECIFICAZIONE DEL PRODOTTO

CUSTOMER LABEL TO CONTAIN  
THE FOLLOWING INFORMATION:







⑤ DESCRIPTION:  
WABCO IDENTIFICATION NUMBER  
ALONG WITH STANDARD PRODUCTION INFORMATION

VOLTAGE:  
SPANNUNG: 12V ±25% DC  
VOLTAGE:  
VOLTAGGIO:

PROTECT TYPE:  
SCHUTZART: IP 30 (IEC 529)  
MODE DE PROTECTION:  
MODO DI PROTEZIONE:

THERMAL RANGE OF APPLICATION:  
THERM. ANWENDUNGSBEREICH: -40°...+75°C  
GAMME D' APPLICATION THERMIQUE:  
CAMPO DI APPLICAZIONE TERMICA:

STORING TEMPERATURE:  
LAGERTEMPORATUR: -40°...+90°C  
TEMPERATURE D' UTILISATION:  
TEMPERATURA DI ESERCIZIO :

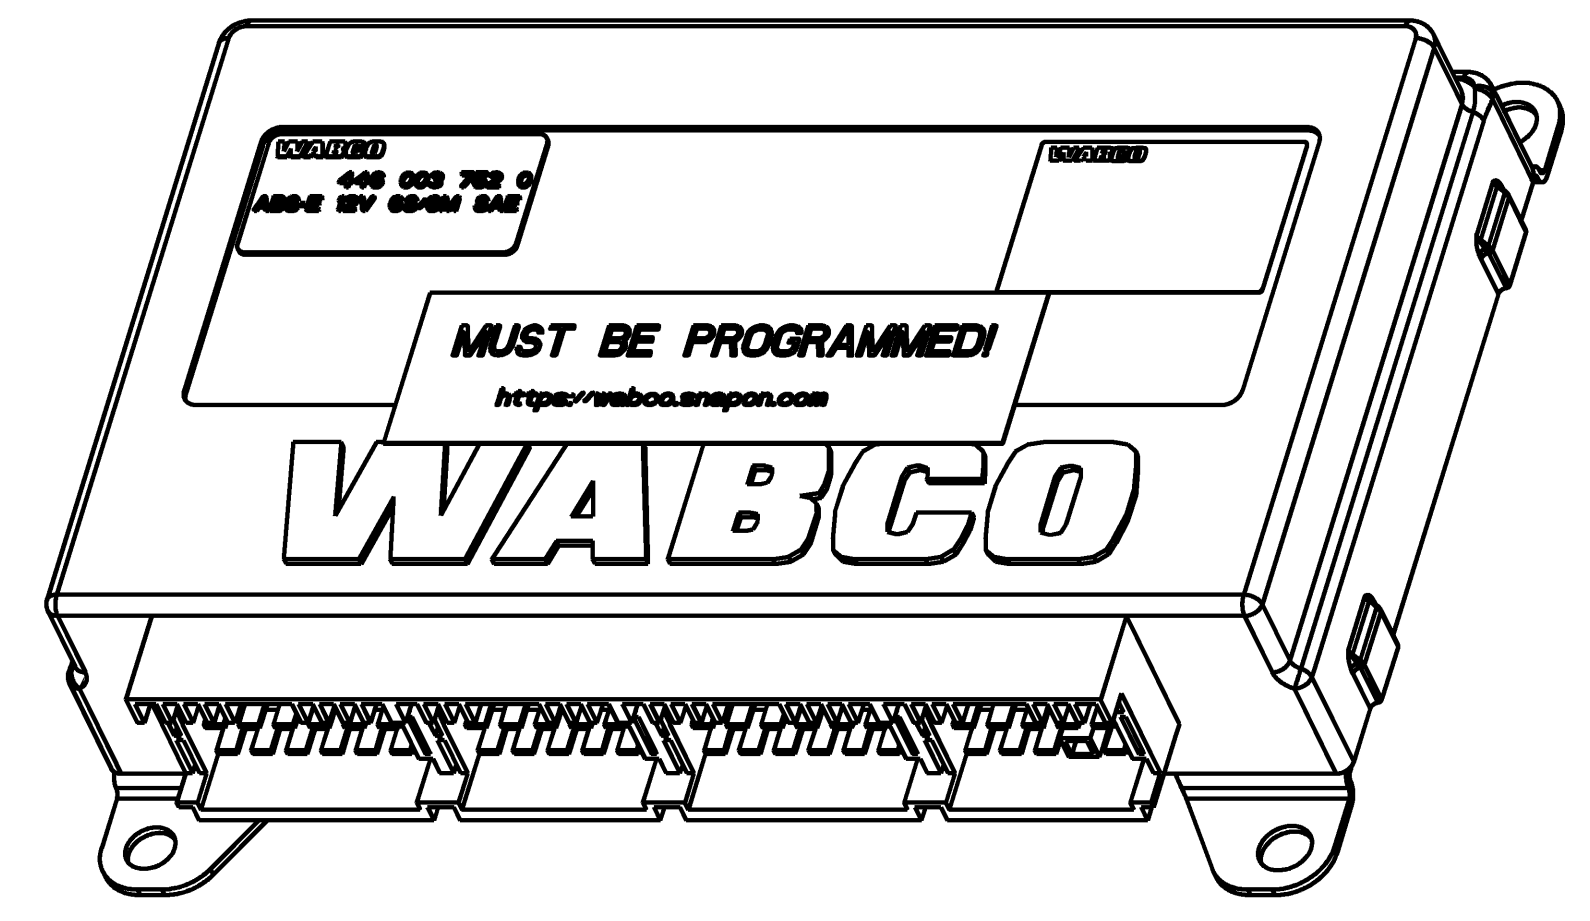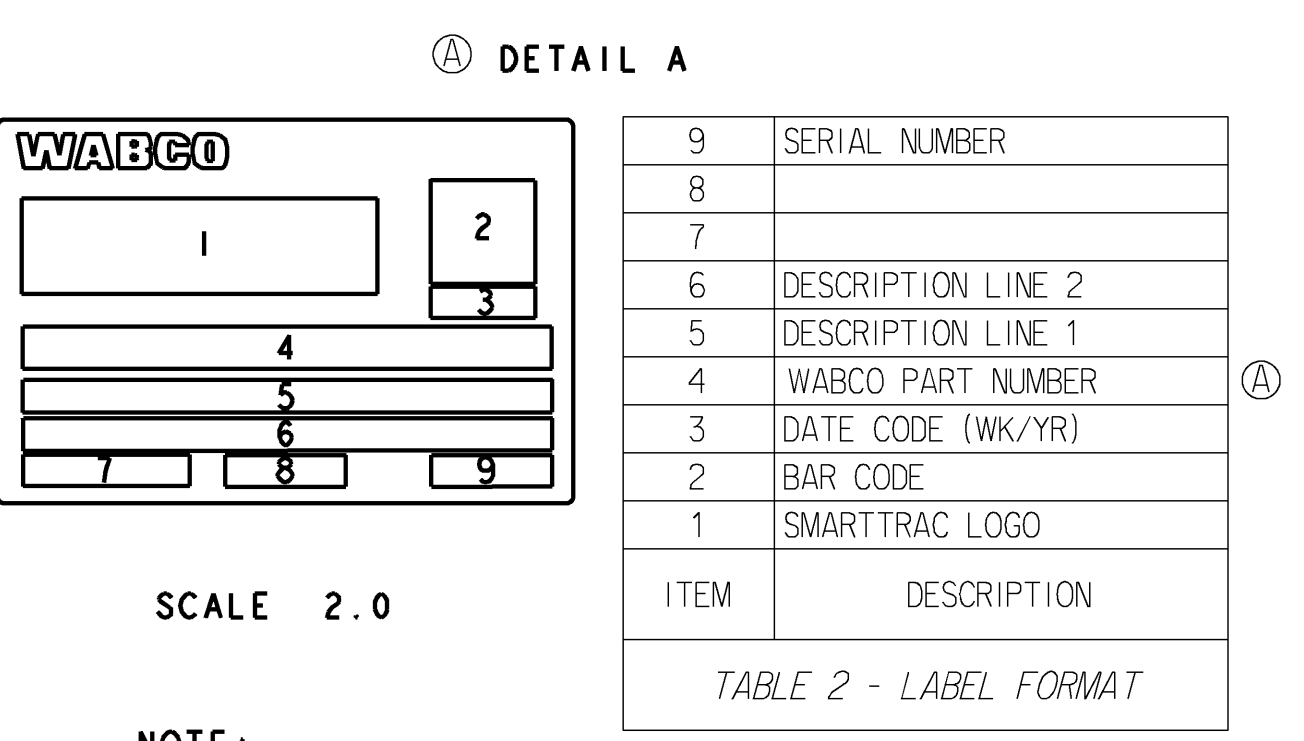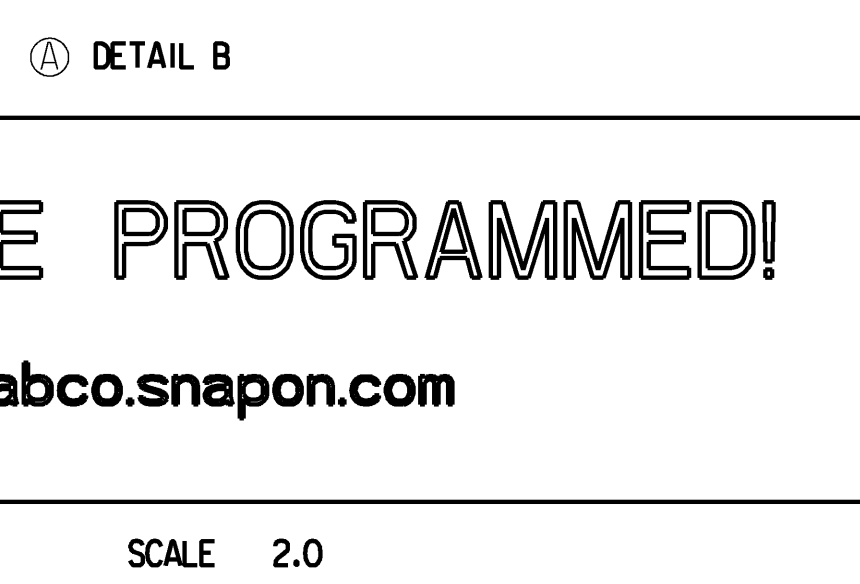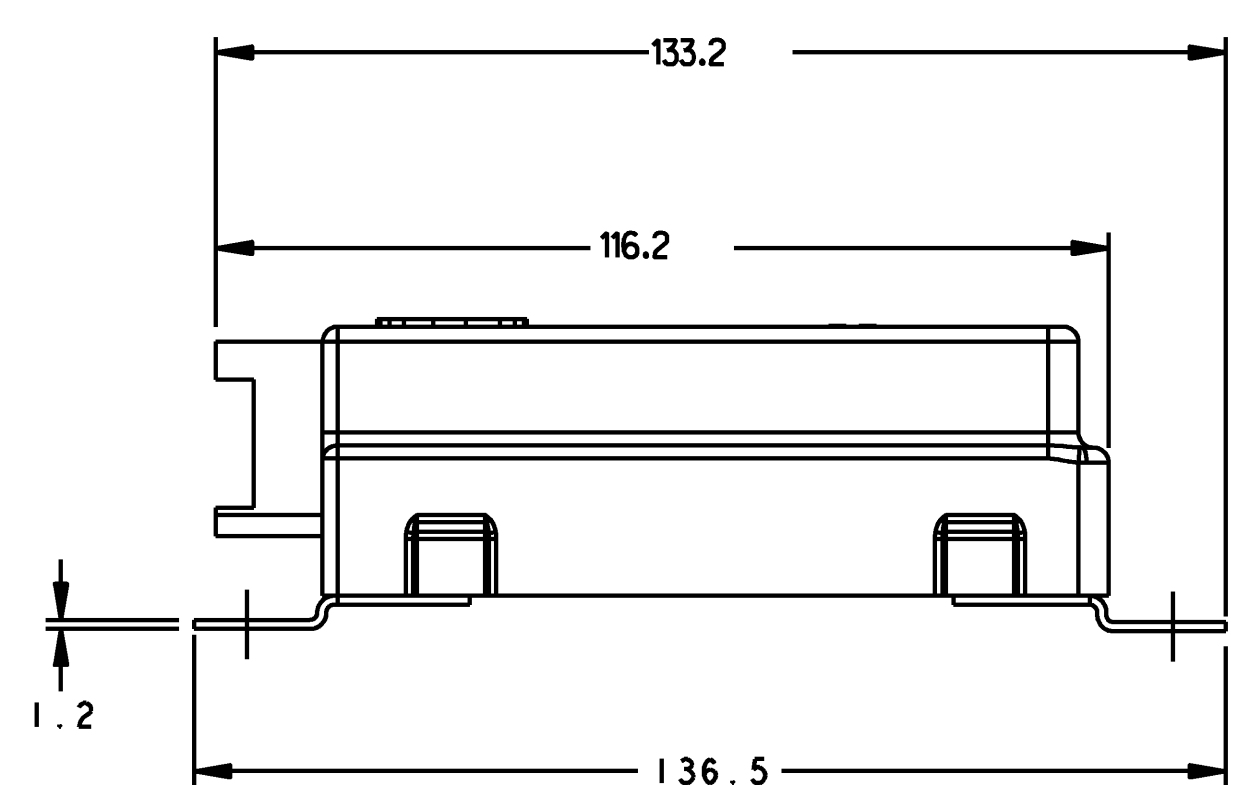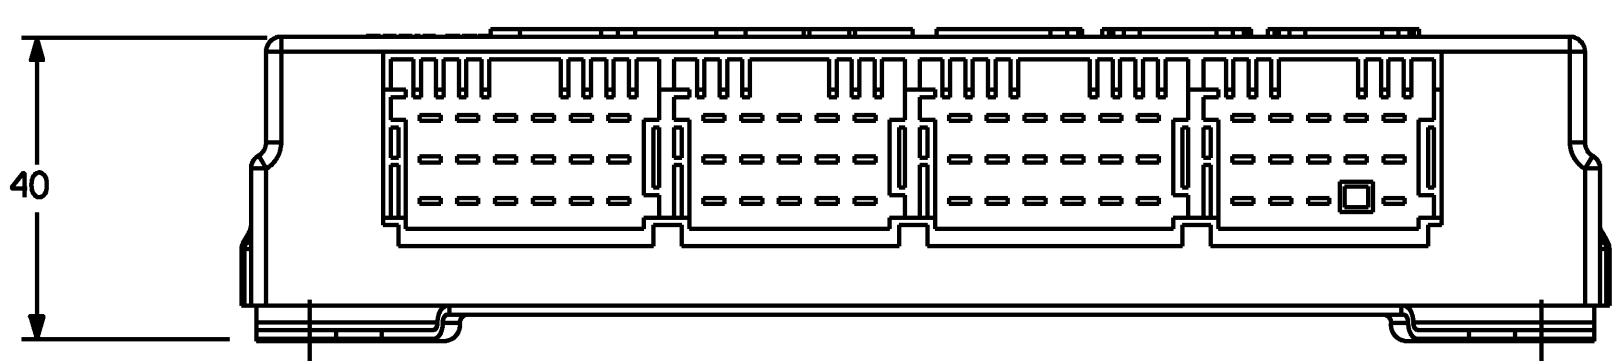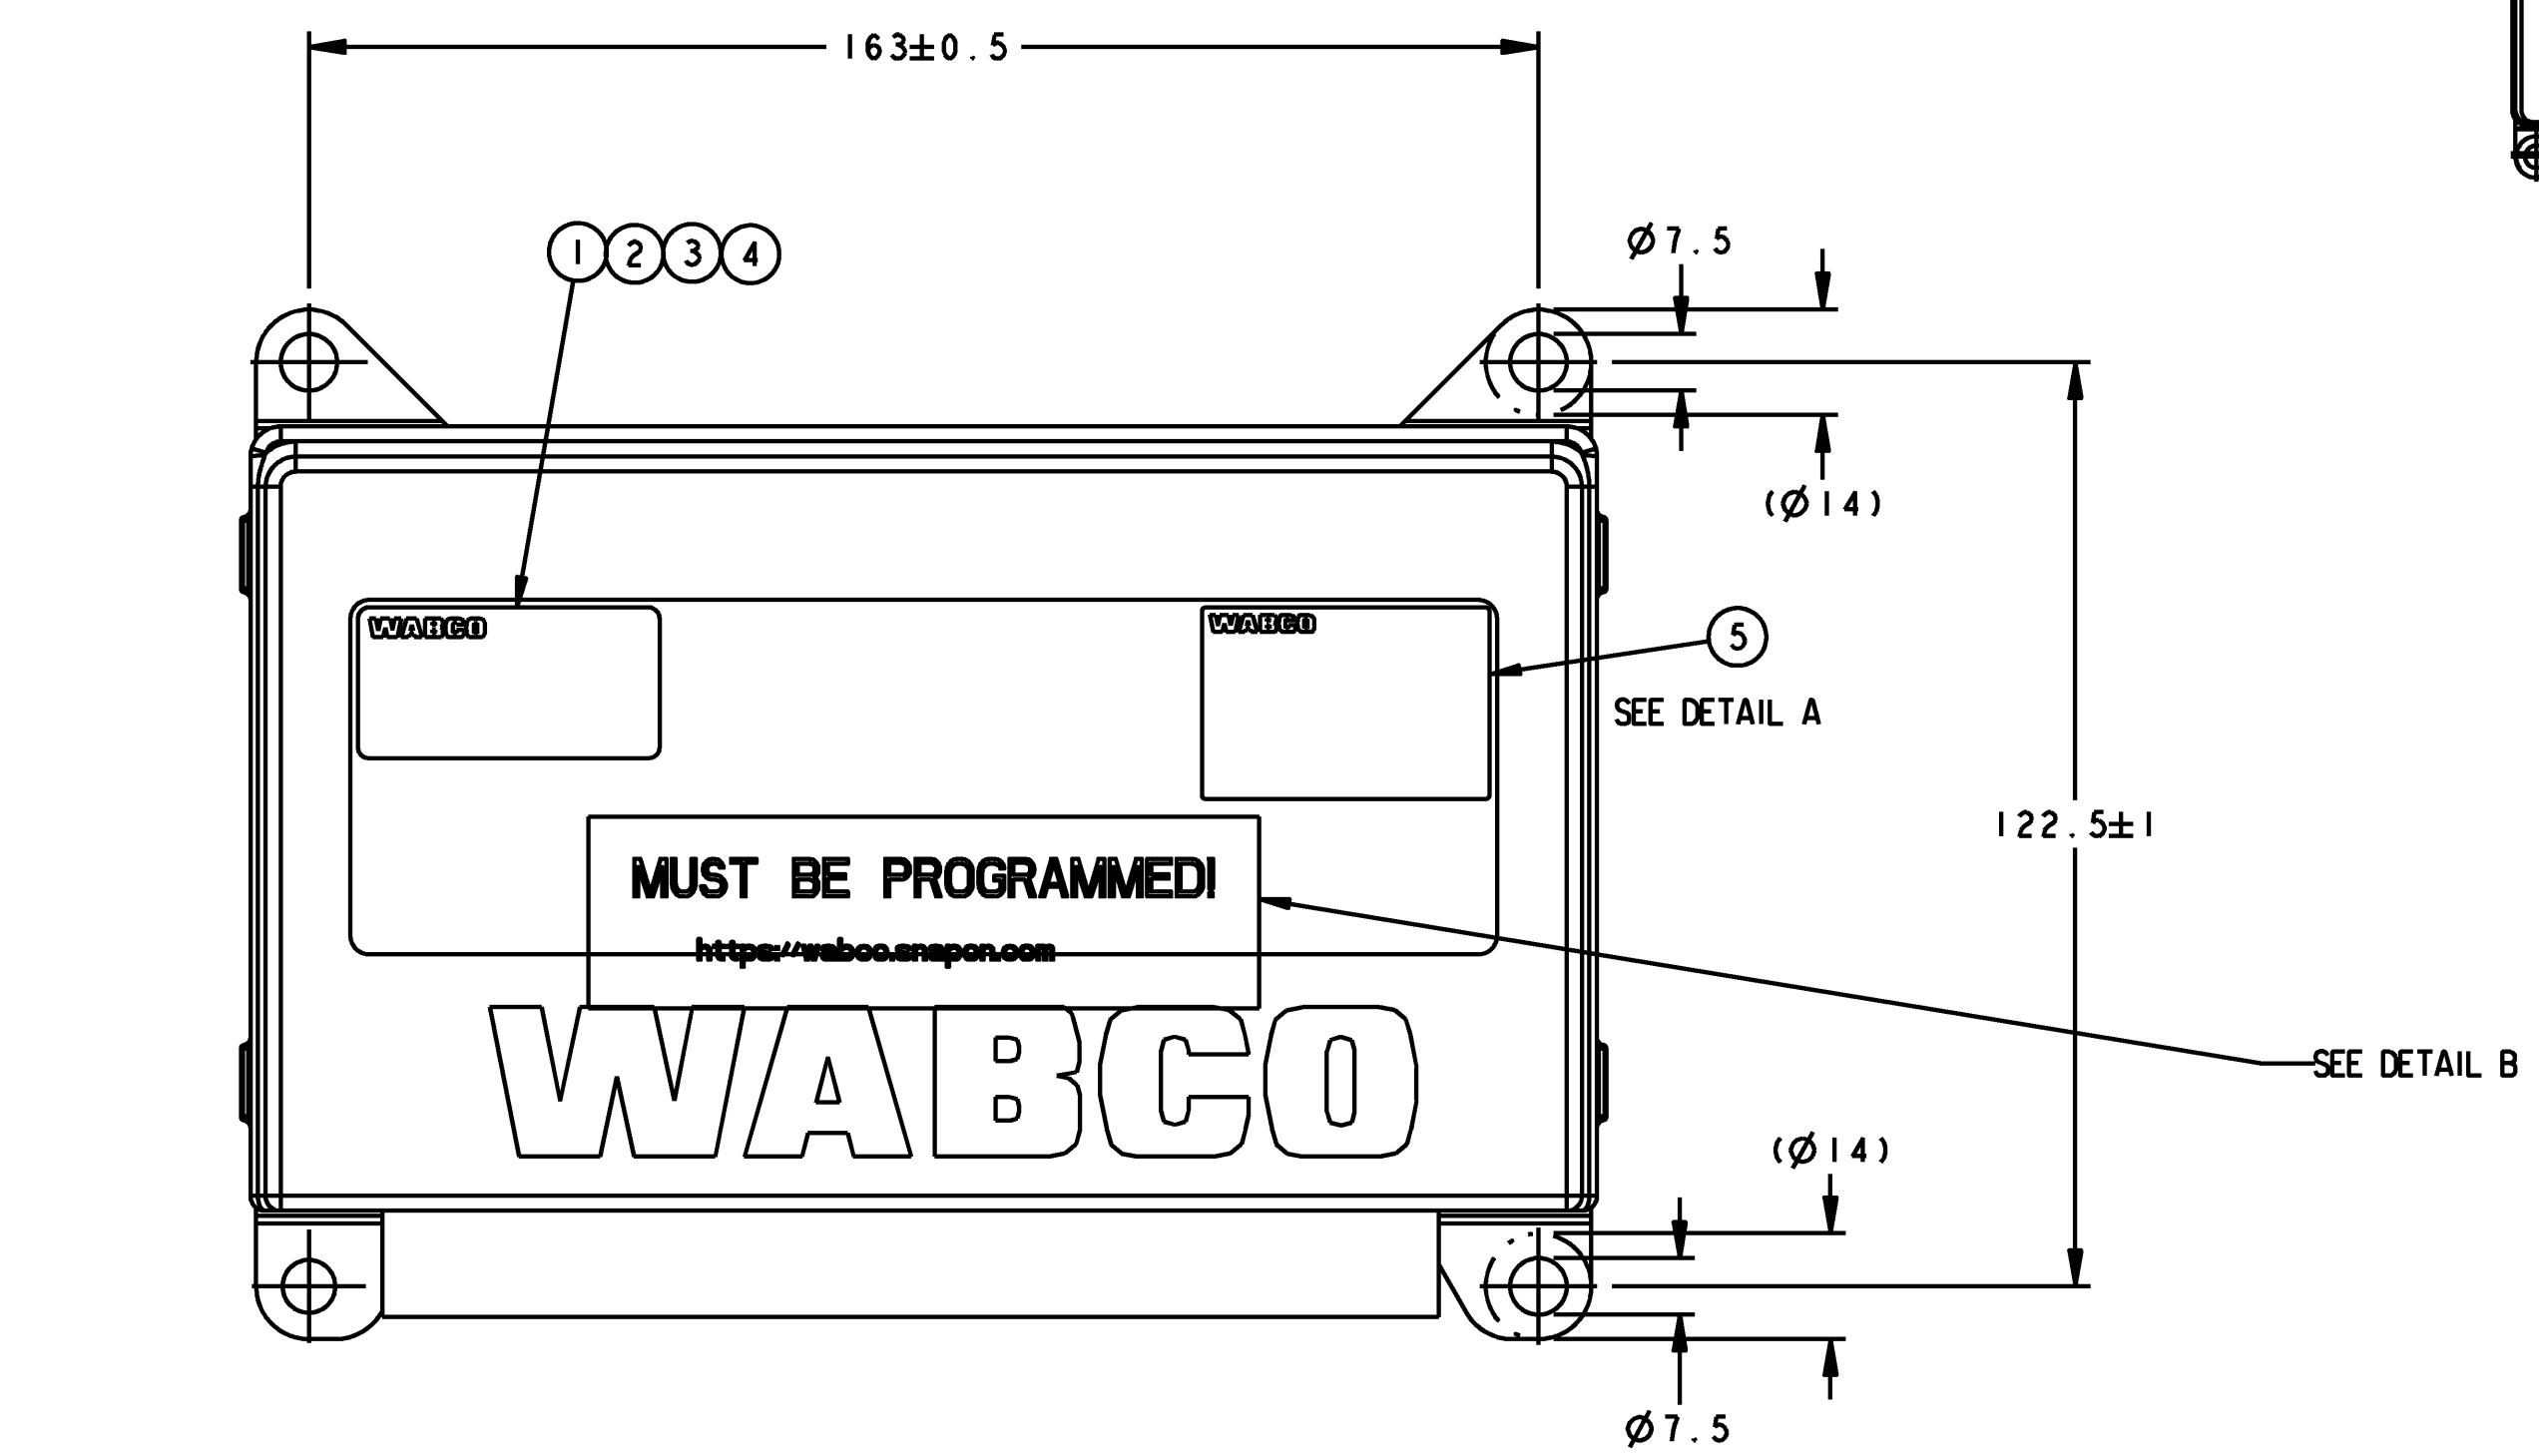

THIRD ANGLE PROJECTION

NOTE:  
LABEL INFORMATION TO BE LOCATED IN  
THE GENERAL LOCATION AS SHOWN ON THE LABEL

|               |              |                                   |                                                             |
|---------------|--------------|-----------------------------------|-------------------------------------------------------------|
| 400 864 006 0 | -            | PABS ECU E4C 12V 6S6M HSA ATC PLC | FOR FURTHER TECHNICAL DATA<br>SEE PRODUCT SPECIFICATION 035 |
| 400 864 005 0 | -            | PABS ECU E4C 12V 6S4M HSA ATC PLC |                                                             |
| 400 864 004 0 | -            | PABS ECU E4C 12V 4S4M HSA ATC PLC |                                                             |
| PART NUMBER   | CUSTOMER P/N | DESCRIPTION                       | NOTE                                                        |

TABLE 1- PART IDENTIFICATION

|                                                             |  |                                        |  |                                        |  |
|-------------------------------------------------------------|--|----------------------------------------|--|----------------------------------------|--|
| General Specification: JED-334-0, Size ISO 14405 E, JED-762 |  |                                        |  | Surface Protection                     |  |
| CUSTOMER PROGRAMBLE ECU                                     |  |                                        |  | -                                      |  |
| Copyright WABCO®                                            |  |                                        |  | WABCO®                                 |  |
| Further Technical Data:                                     |  |                                        |  | PABS ECU E4C 12V TABLE DRAWING         |  |
| Doc. Code:                                                  |  | Sheet:                                 |  | To:                                    |  |
| General Tolerances JED-261                                  |  | Checked:                               |  | Expert:                                |  |
| Range of Nominal Dimensions (± mm)                          |  | 2019-08-09                             |  | Gulierrez                              |  |
| Class 11                                                    |  | < 50                                   |  | > 50                                   |  |
| Fine                                                        |  | 0.5                                    |  | 1.0                                    |  |
| Medium                                                      |  | 1.0                                    |  | 2.0                                    |  |
| Coarse                                                      |  | 2.0                                    |  | 3.5                                    |  |
| Tapped Holes acc. lapped hole                               |  | 1) Tolerance Class Applied Crossmarked |  | 2) Tolerance Class Applied Crossmarked |  |
| Mass                                                        |  | Scale                                  |  | Material No.                           |  |
| 0.6 kg                                                      |  | 1:1                                    |  | 400 864 000 0                          |  |
| Size                                                        |  | CAD System                             |  | Date of first issue: 2015-04-02        |  |
| A 1                                                         |  | CREO                                   |  | Doc. Code Language Sheet               |  |
| 501845                                                      |  | Revision                               |  | 5x A                                   |  |
| 6300_MW                                                     |  | Techn. Resp.                           |  | Replacement for                        |  |
| -                                                           |  | -                                      |  | -                                      |  |