

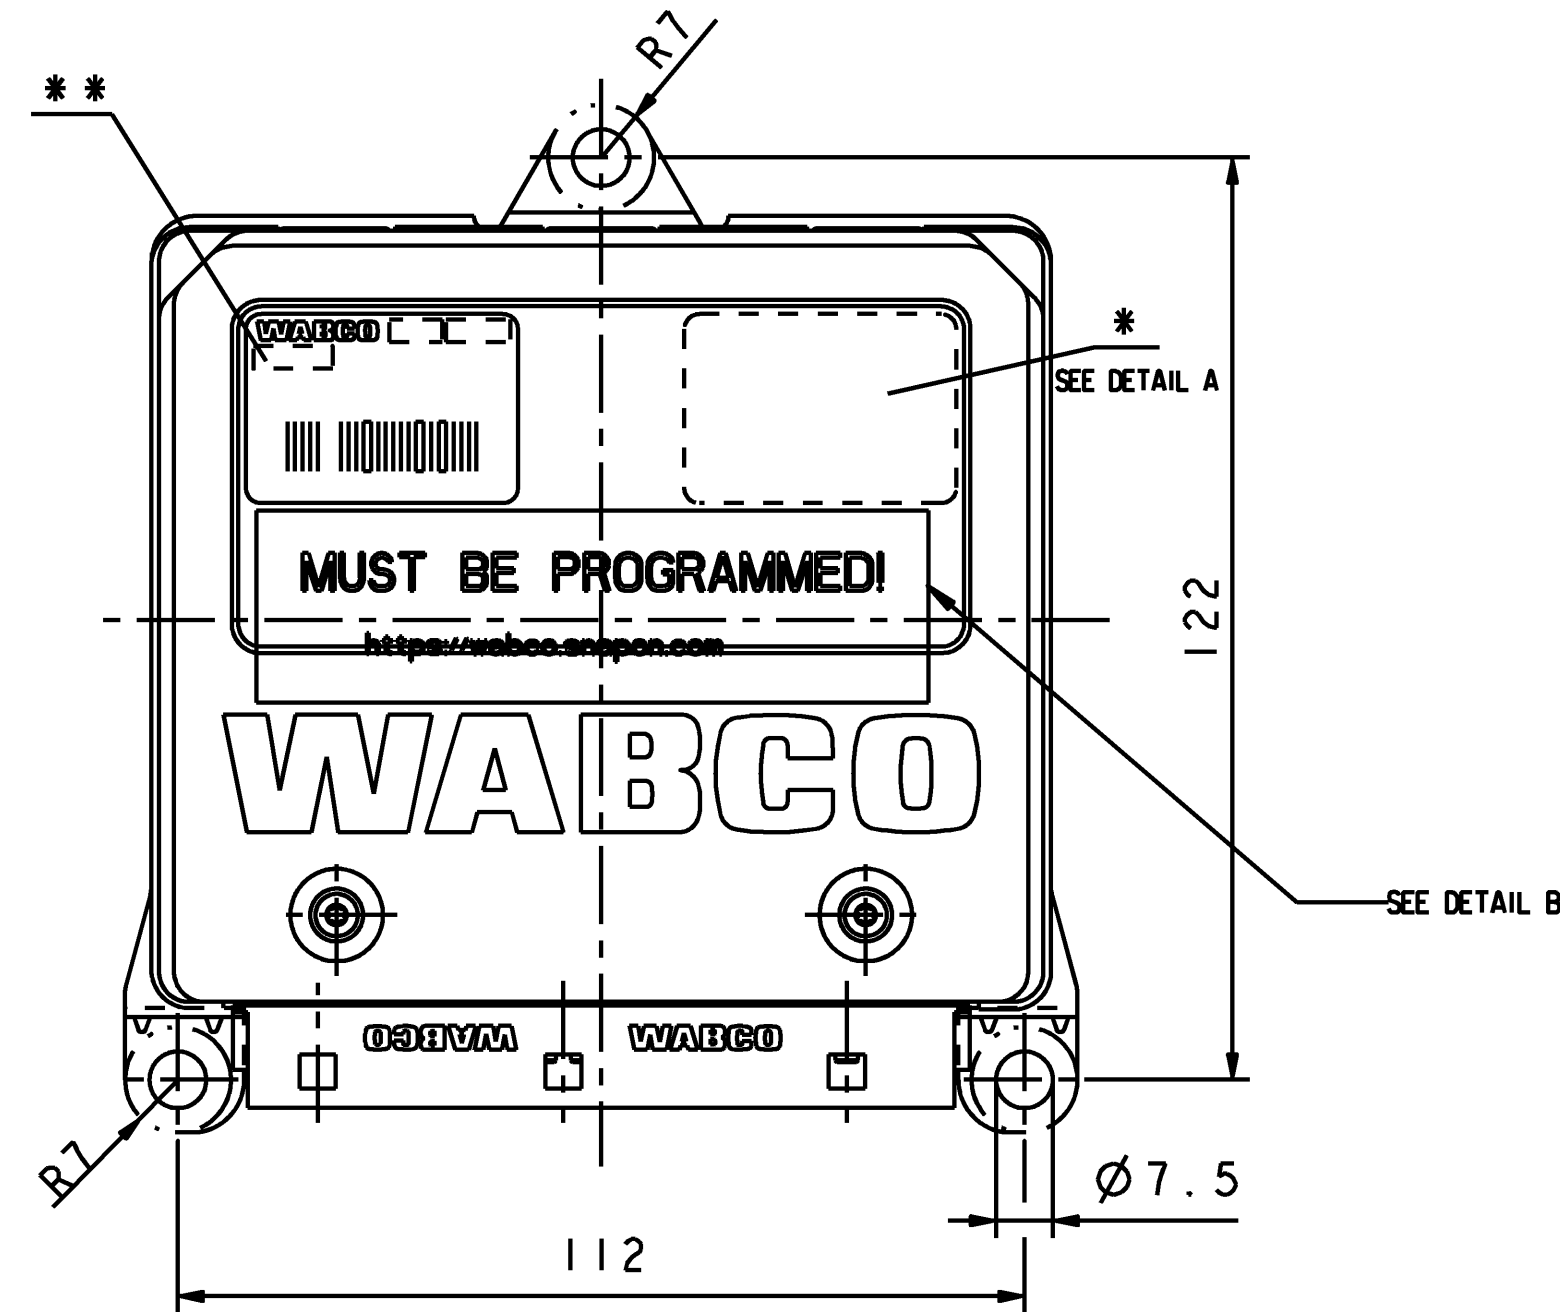
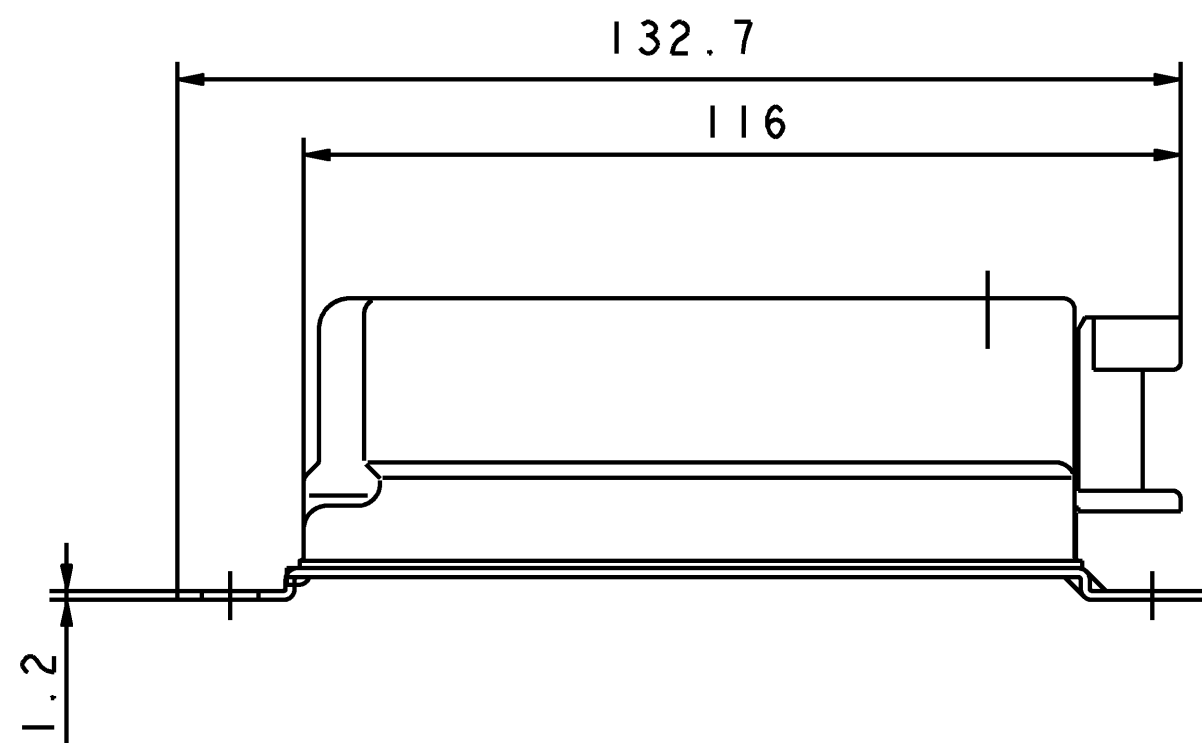



Tutti i diritti sono riservati. È vietata espressamente la ristampa o l'uso non autorizzato senza permesso scritto dalla WABCO. Toute réimpression ou utilisation non autorisée sans la permission écrite de la WABCO est formellement interdite. Toute réimpression ou utilisation non autorisée sans la permission écrite de la WABCO est formellement interdite. Alle Rechte sind vorbehalten. Nachdruck, Vervielfältigung und Verbreitung, auch auszugsweise, ist ohne schriftliche Genehmigung der WABCO AG. All rights reserved. Any reprinting or unauthorized use without the written permission of WABCO is expressly prohibited. Copyright © 2019 WABCO. All rights reserved. This document is the property of WABCO. It is not to be distributed outside the company.

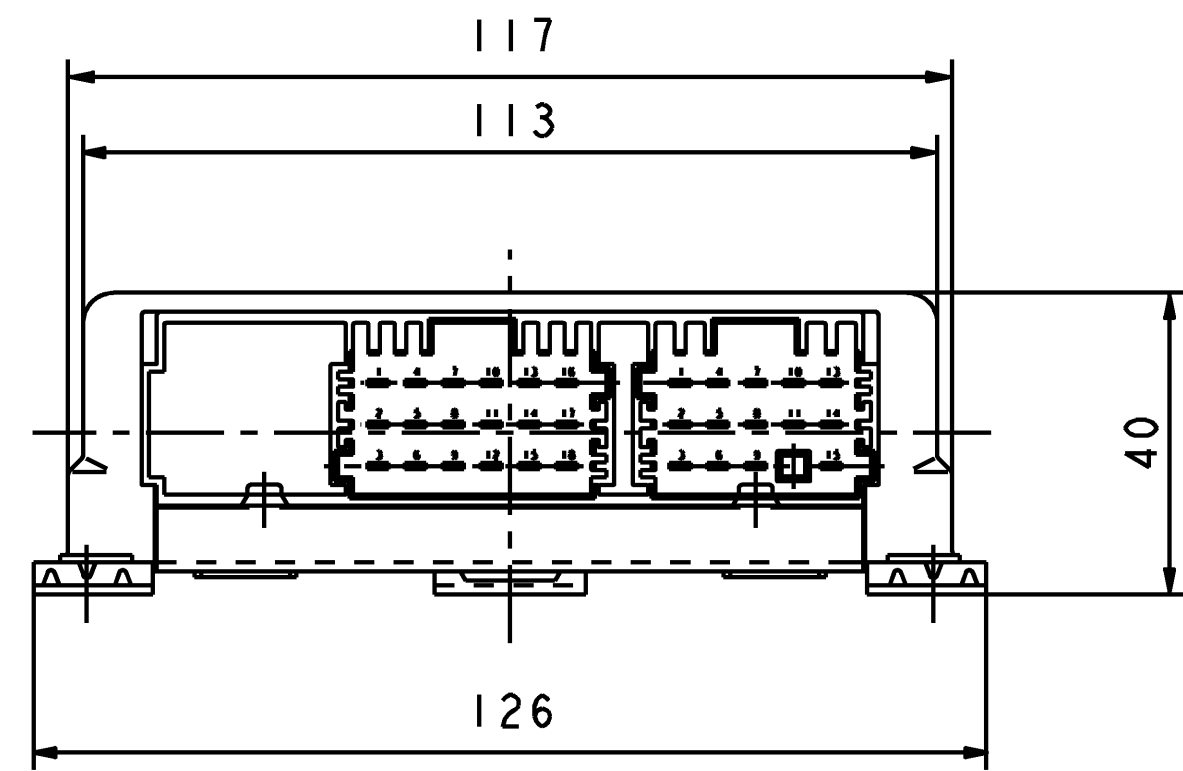

INSTALLATION POSITION :
EINBAULAGE :
POSITION D'INSTALLATION :
POSIZIONI DI MONTAGGIO :

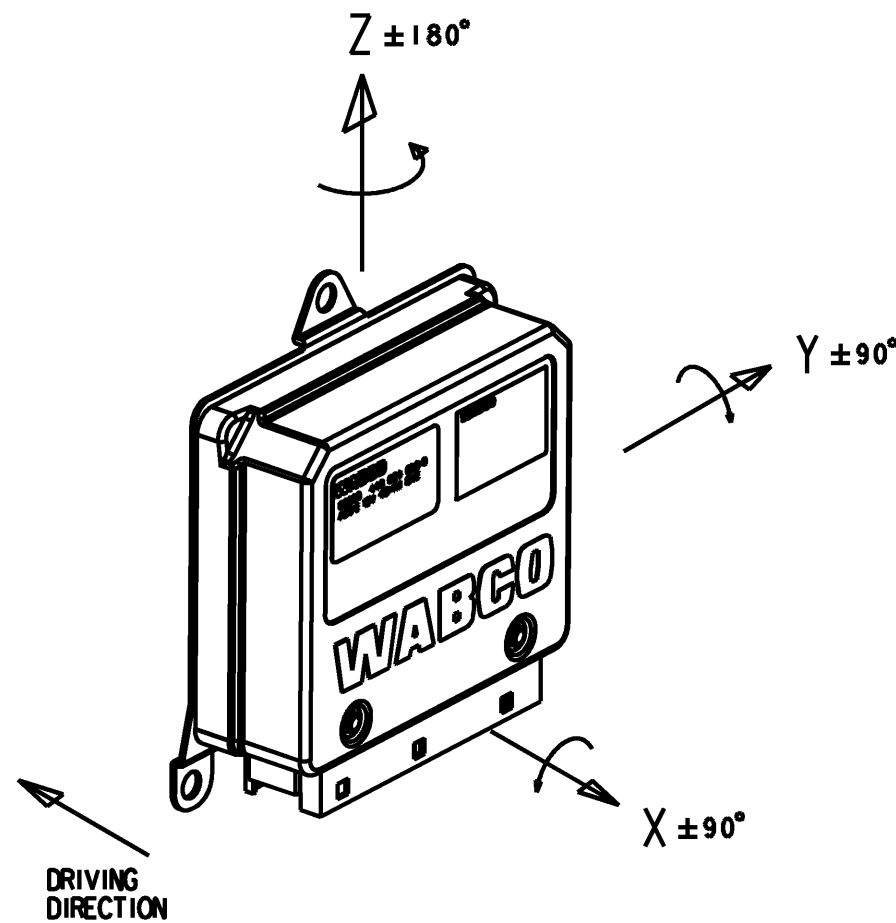

Ⓐ DETAIL A

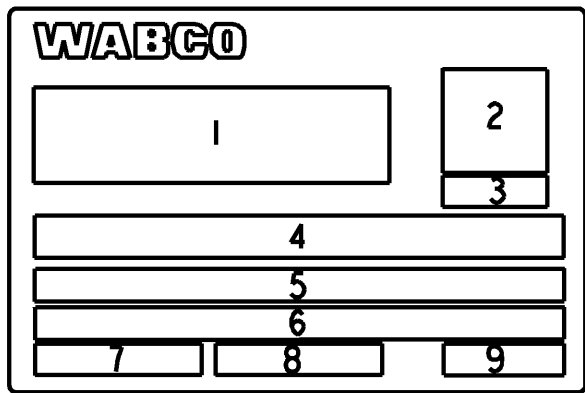

SCALE 2.0

9	SERIAL NUMBER
8	
7	
6	DESCRIPTION LINE 2
5	DESCRIPTION LINE 1
4	WABCO PART NUMBER
3	DATE CODE (WK/YR)
2	BAR CODE
1	
ITEM	DESCRIPTION

TABLE 2 - LABEL FORMAT

NOTE:
1) LABEL INFORMATION TO BE LOCATED IN THE GENERAL LOCATION AS SHOWN ON THE LABEL

Ⓑ DETAIL B



SCALE 2.0

NOTE:

"MUST BE PROGRAMMED!" ALONG WITH WEB ADDRESS FOR PROGRAMMING SHALL BE VISIBLE AND CENTERED ON LABEL.

400 864 011 0	-	PABS ECU E4C 12V 4S4M	FOR FURTHER TECHNICAL DATA SEE PRODUCT SPECIFICATION 035
PART NUMBER	CUSTOMER P/N	DESCRIPTION	NOTE

TABLE 1 - PART IDENTIFICATION

VOLTAGE :
SPANNUNG : 12V ±25% DC ***
VOLTAGE :
VOLTAGGIO:

PROTECT TYPE :
SCHUTZART : IP 30 (IEC 529)
MODE DE PROTECTION:
MODO DI PROTEZIONE:

THERMAL RANGE OF APPLICATION :
THERM. ANWENDUNGSBEREICH : -40°C...+75°C
GAMME D'APPLICATION THERMIQUE:
CAMPO DI APPLICAZIONE TERMICA:


STORING TEMPERATURE :
LAGERTEMPORATUR : -40°C...+90°C ***
TEMPERATURE D'UTILISATION:
TEMPERATURA DI ESERCIZIO :

MALE MULTIPOINT CONNECTOR: SURFACE PROTECTION : TINNED
MESSERLEISTE: OBERFLÄCHENSCHUTZ : VERZINNT
CONNECTEUR MALE MULTIBROCHE: PROTECTION DE SURFACE: ETAME
SPINE MULTIPA: PROTEZIONE SUPERFICIALE : STAGNATO

CUSTOMER LABEL : OPTIONAL
KUNDENAUFKLEBER : BELIEBIG
ETIQUETTE ADHESIVE DU CLIENT : A VOLONTE
ETICHETTA ADESIVA DEL CLIENTE: A SCELTA

SERIAL NUMBER GREATER THAN :
Fortschrittzahl größer als : 0
NUMERO DE SERIE PLUS GRAND QUE:
NUMERO DI SERIE PIU GRANDE DI :

FOR FURTHER TECHNICAL DATA SEE PRODUCT SPECIFICATION
WEITERE TECHNISCHE DATEN SIEHE PRODUKTSPEZIFIKATION
POUR INFORMATION COMPLEMENTAIRES VOIR LES SPECIFICATIONS DU PRODUIT
PER INFORMAZIONI ULTERIORI VEDI LA SPECIFICAZIONE DEL PRODOTTO

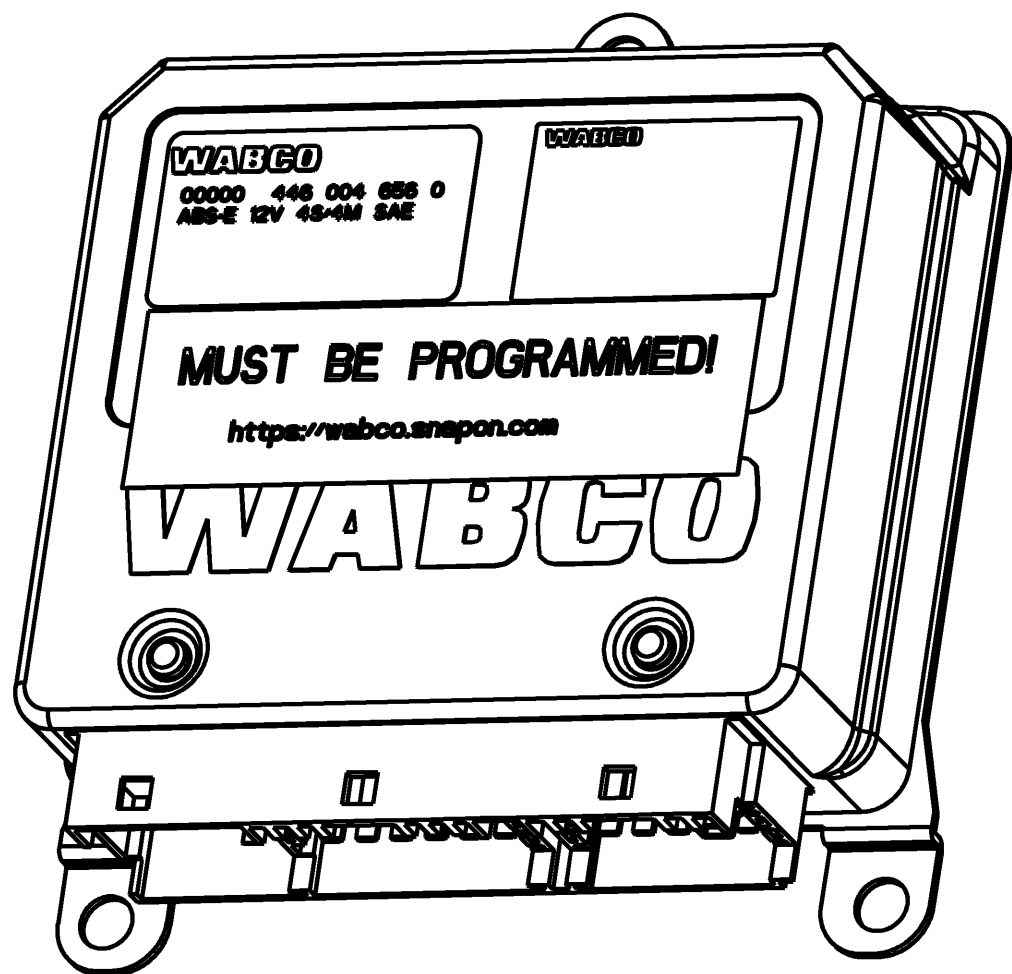

General Specification: JED-334-0					Copyright WABCO®		WABCO®				
Further Technical Data:					Date		Signature		PABS ECU E4C 12V		
Doc. Code:		Sheet:	To		Drawn		Srinivasaperumal				
General Tolerances JED-261					Checked		Gutierrez				
Range of Nominal Dimensions (± mm)					2019-07-02		Expert				
Class	1)	≤ 50	> 50 ≤ 180	> 180 ≤ 400	> 400	±3°					
Fine		0.5	1.0	1.5	2.0						
Medium	✗	1.0	2.0	3.0	4.0						
Coarse		2.0	3.5	5.0	6.5						
Tapped Holes acc. 0											
1) Tolerance Class Applied Crossmarked											
13.						A 1		Material No.		Date of first issue: 2015-04-02	
						400 864 011 0		Doc. Code		Language	Sheet
								005		EN	1/1
						EDN-No.		Revision	Techn. Resp.		Replacement for
						501845		4x B	63300_MW		-
								10mm			