


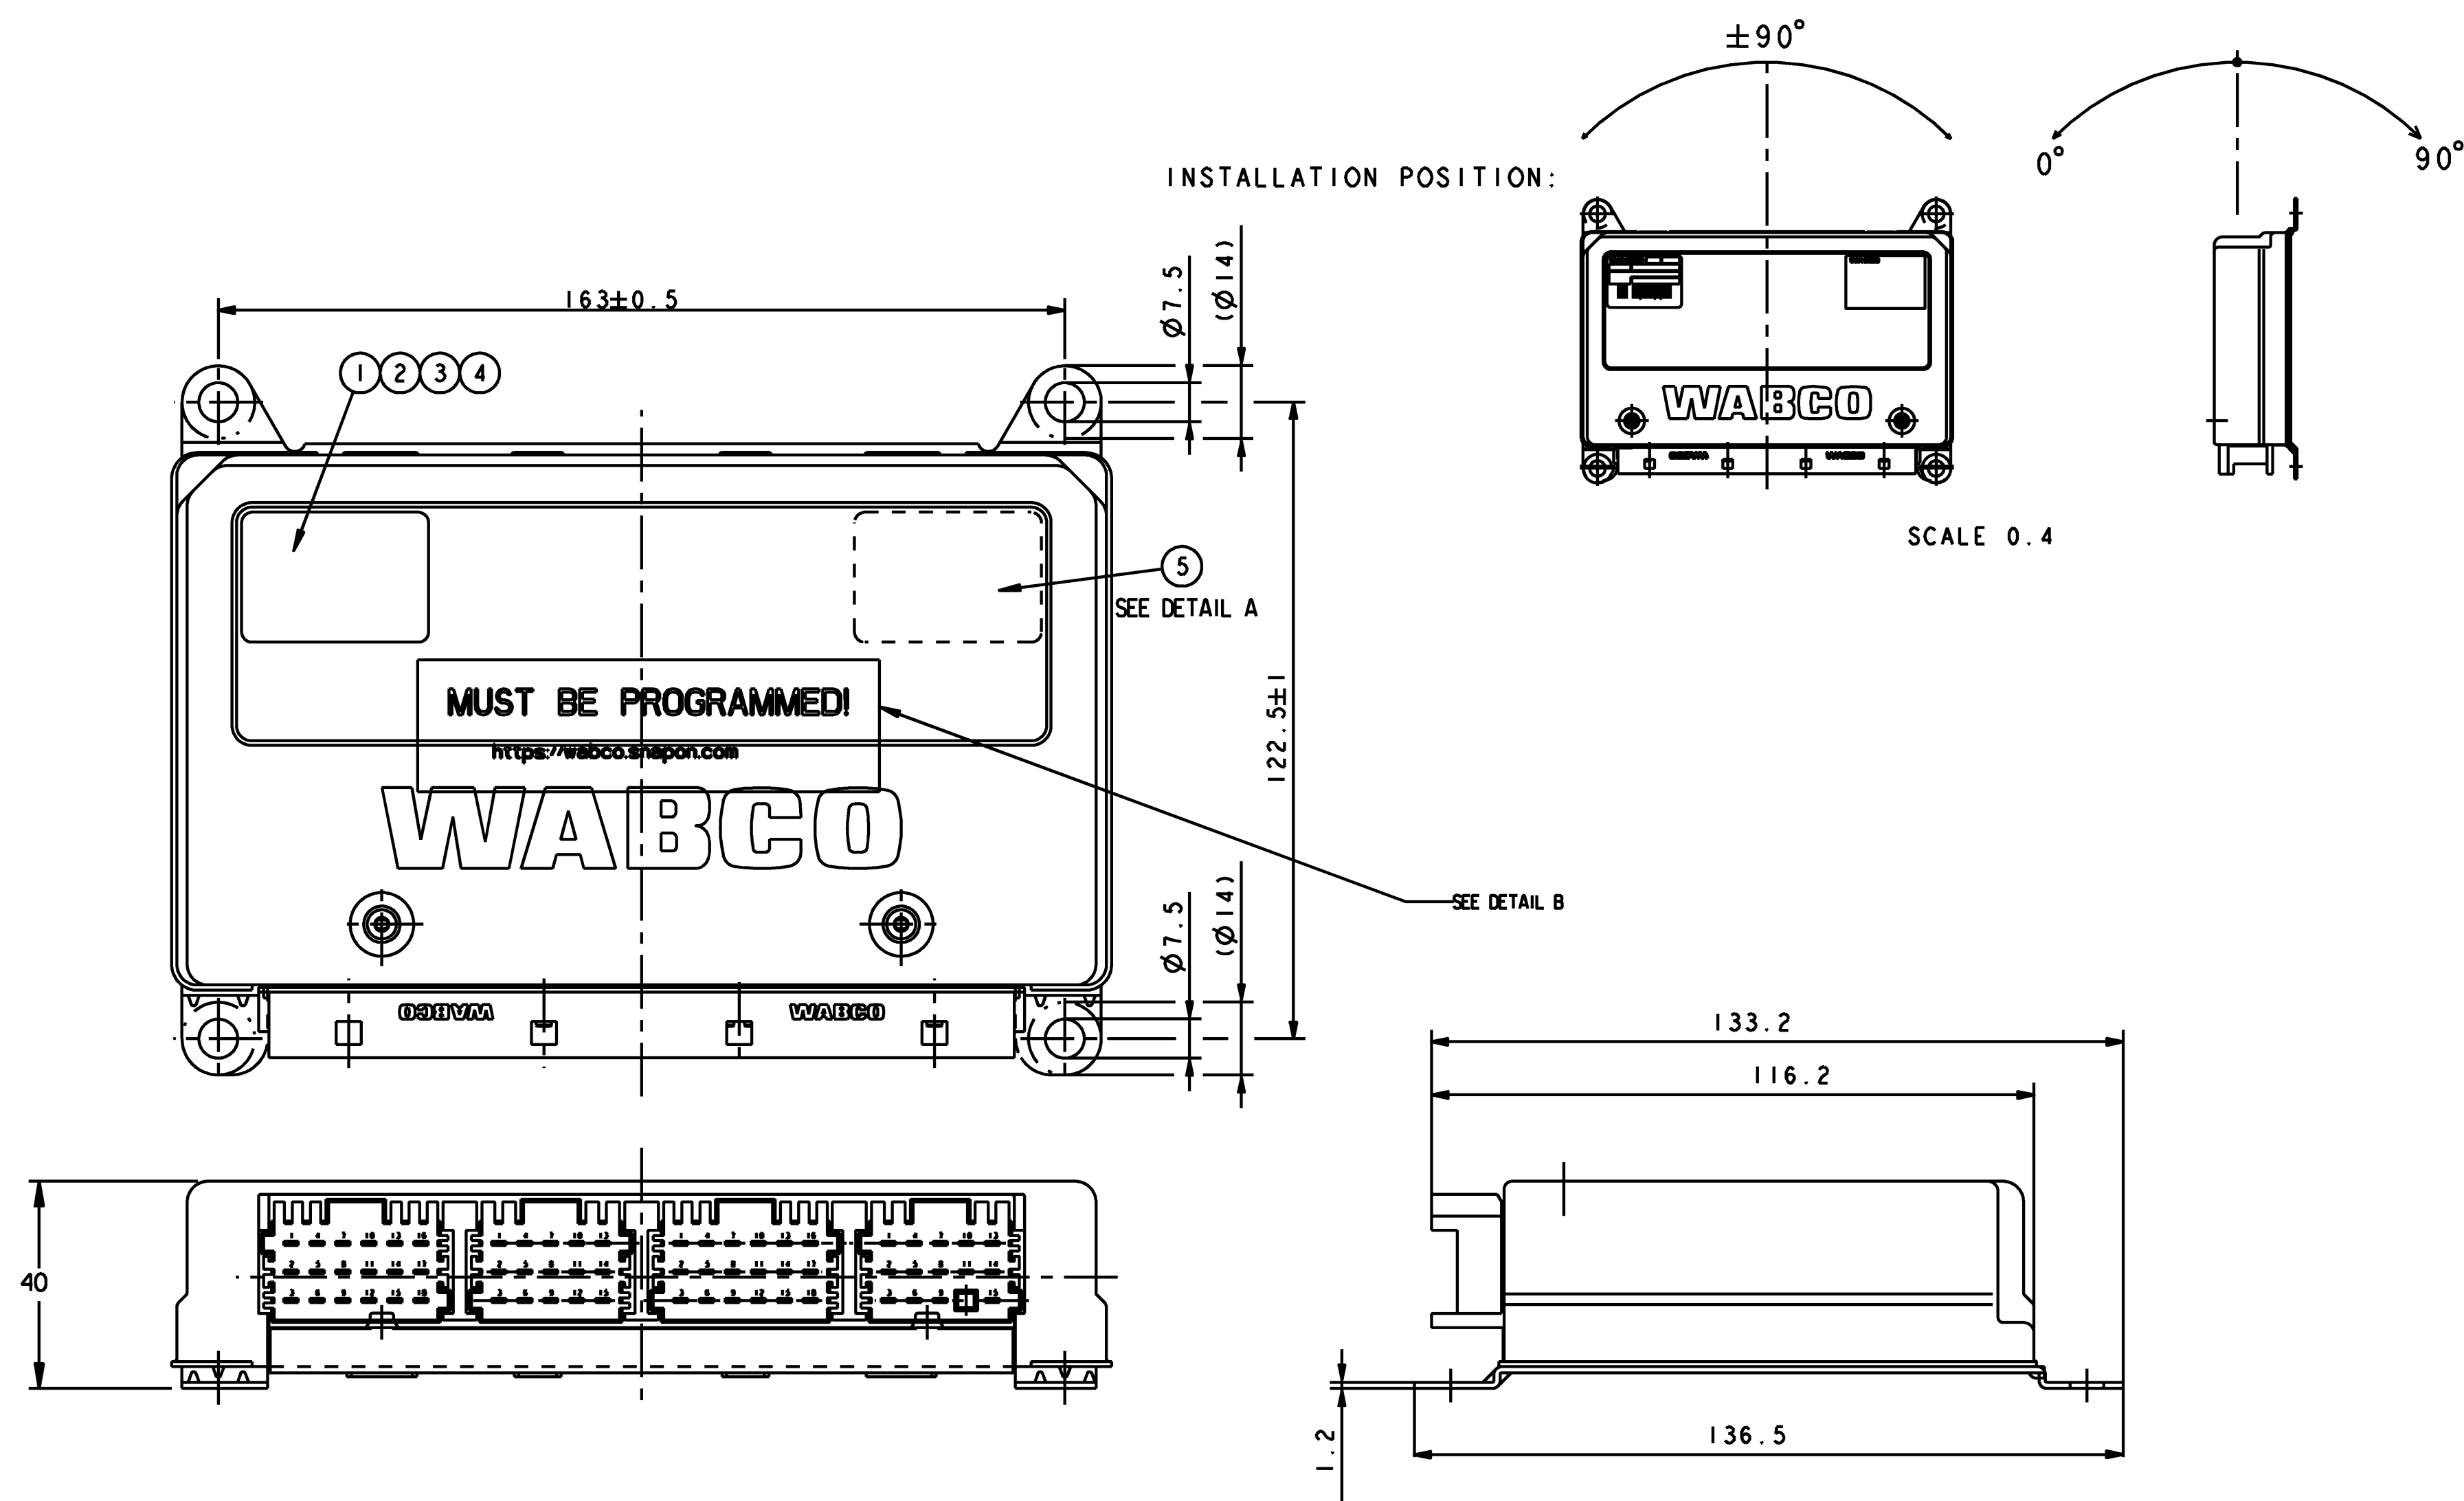

MALE MULTIPOINT CONNECTOR: SURFACE PROTECTION:
MESSERLEISTE: OBERFLÄCHENSCHUTZ:
CONNECTEUR MALE MULTIBROCHE: PROTECTION DE SURFACE:
SPINE MULTIPA: PROTEZIONE SUPERFICIALE:

TINNED
VERZINNT
ETAME
STAGNATO

SERIAL NUMBER GREATER THAN:
 ① FORTSCHRITZAHZ GROESSER ALS: 0
 NUMERO DE SERIE PLUS GRAND QUE:
 NUMERO DI SERIE PIU GRANDE:

PRODUCTION PLACE:
② PRODUKTIONSSTAETTE: JED-225
LIEU DE FABRICATION:
LUOGO DI FABBRICAZIONE:

DATE OF MANUFACTURE:
③ HERSTELLDATUM: JED-226
DATE DE FABRICATION:
DATA DI FABBRICAZIONE:

④ COUNTRY OF ORIGIN:
URSPRUNGSLAND: JED-225
PAYS D'ORIGINE:
PAESE D'ORIGINE:

CUSTOMER LABEL:	OPTIONAL
⑤ KUNDENAUFKLEBER:	BELIEBIG
ETIQUETTE ADHESIVE DU CLIENT:	A VOLONTE
ETICHETTA ADESIVA DEL CLIENTE:	A SCELTA

FOR FURTHER TECHNICAL DATA SEE PRODUCT SPECIFICATION
WEITERE TECHNISCHE DATEN SIEHE PRODUKTSPEZIFIKATION
POUR INFORMATION COMPLEMENTAIRES VOIR LES SPECIFICATIONS DU PRODUIT
PER INFORMAZIONI ULTERIORI VEDI LA SPECIFICAZIONE DEL PRODOTTO

CUSTOMER LABEL TO CONTAIN
THE FOLLOWING INFORMATION:


⑧ DESCRIPTION:
WABCO IDENTIFICATION NUMBER
ALONG WITH STANDARD PRODUCTION INFORMATION

VOLTAGE :
SPANNUNG: 12V $\pm 25\%$ DC
VOLTAGE :
VOLTAGGIO:

PROTECT TYPE:
SCHUTZART: IP 30 (IEC 529)
MODE DE PROTECTION:
MODO DI PROTEZIONE:

THERMAL RANGE OF APPLICATION:
THERM. ANWENDUNGSBEREICH: -40°...+75°C
GAMME D'APPLICATION THERMIQUE:
CAMPO DI APPLICAZIONE TERMICA:

STORING TEMPERATURE:
LAGERTEMPORATUR: -40° .. +90°C
TEMPERATURE D' UTILISATION:
TEMPERATURA DI ESERCIZIO :

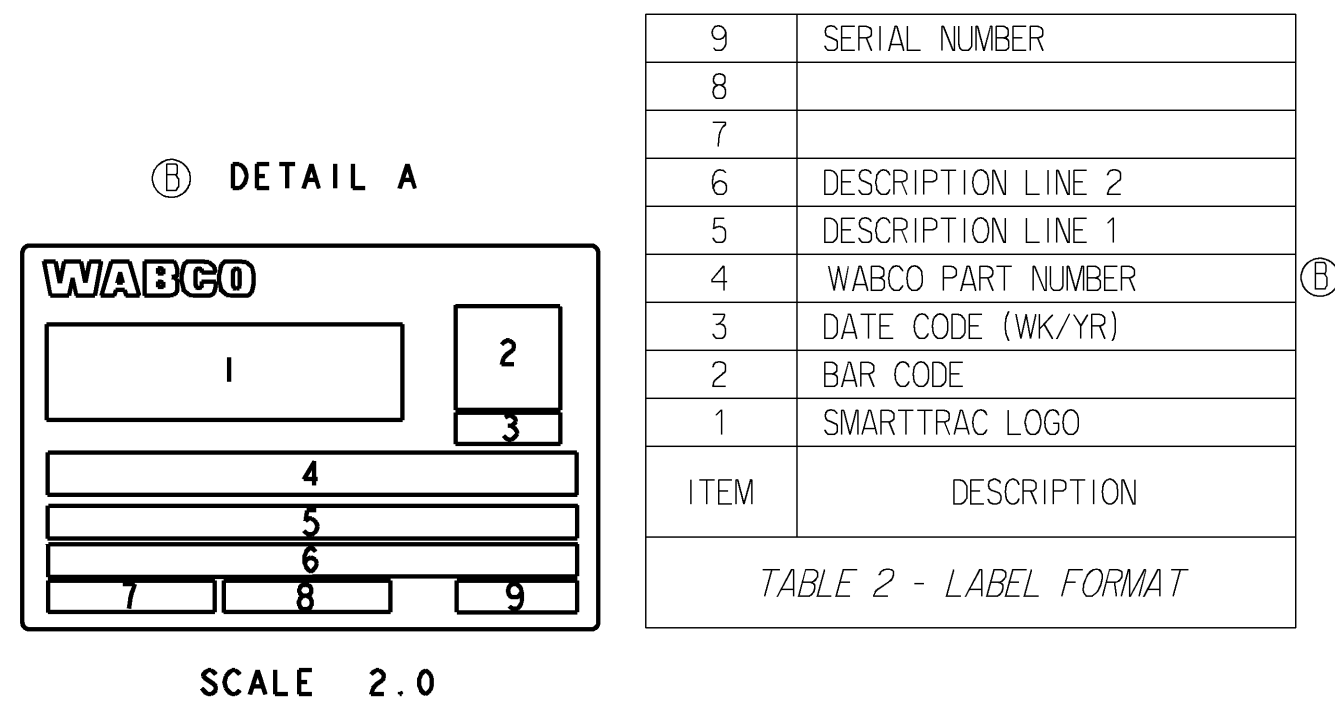


NOTE:
1) LABEL INFORMATION TO BE LOCATED IN
THE GENERAL LOCATION AS SHOWN ON THE LABEL

NOTE:
"MUST BE PROGRAMMED!" ALONG WITH WEB ADDRESS FOR PROGRAMMING
SHALL BE VISIBLE AND CENTERED ON LABEL.

400 864 569 0	-	PABS ECU E4C 24V 6S6M WITH ATC OPTION	FOR FURTHER TECHNICAL DATA SEE PRODUCT SPECIFICATION 035
400 864 568 0	-	PABS ECU E4C 24V 4S4M WITH ATC OPTION	
400 864 014 0	-	PABS ECU E4C 24V 6S6M WITH ATC OPTION	
400 864 013 0	-	PABS ECU E4C 24V 4S4M WITH ATC OPTION	

TABLE 1 - PART IDENTIFICATION

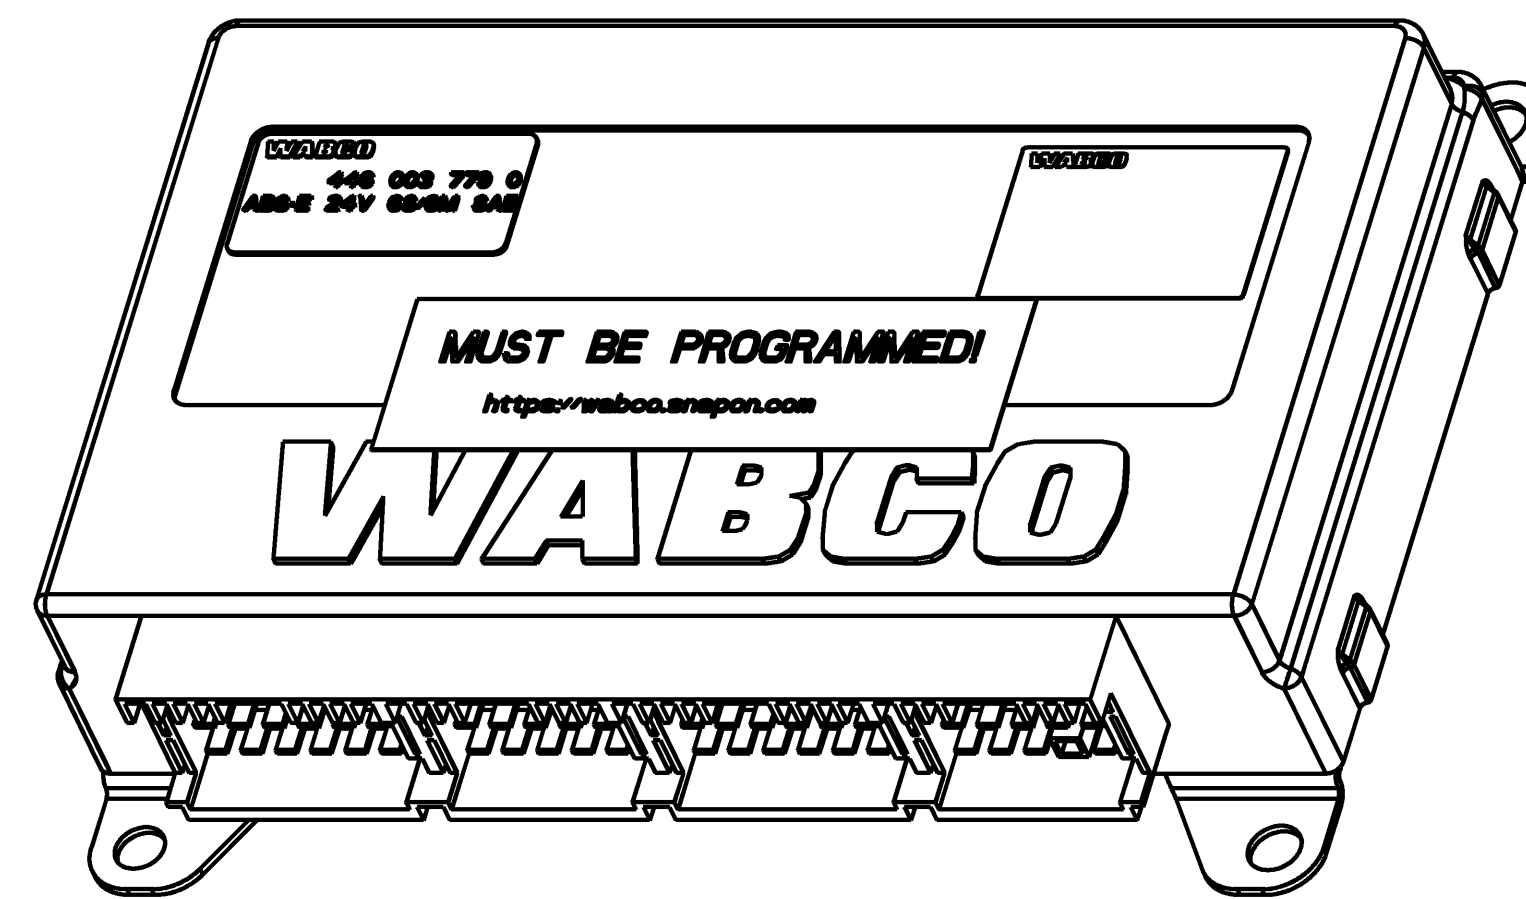

THIRD ANGLE PROJECTION

General Specification: JED-334-C				Copyright WABCO®		WABCO®											
Further Technical Data:				Date _____ Signature _____		PABS ECU E4C 24V TABLE DRAWING											
Doc. Code:		Sheet: _____ To _____		2019-07-19		Srinivasaperumal											
General Tolerances JED-261				Checked _____		Gutierrez											
Range of Nominal Dimensions (± mm)				2019-07-19		Expert _____											
<table><tr><td>≤ 50</td><td>> 50 ≤ 160</td><td>> 160 ≤ 400</td><td>> 400</td></tr><tr><td>± 0.3</td><td>± 0.4</td><td>± 0.5</td><td>± 0.6</td></tr></table>				≤ 50	> 50 ≤ 160	> 160 ≤ 400	> 400	± 0.3	± 0.4	± 0.5	± 0.6						
≤ 50	> 50 ≤ 160	> 160 ≤ 400	> 400														
± 0.3	± 0.4	± 0.5	± 0.6														
Cross 1) ± 3°				Mass		Scale		Material No.		Date of first issue: 2015-04-01							
Fine				0.6 kg		1:1		400 864 012 0		Doc.Code							
Medium				Size		CAD System				Language							
Coarse				A 1		CREO				053 EN 1/1							
Tapped Holes acc. 0				EDN.No.		Revision		Techn. Resp.		Replacement for							
1) Tolerance Class Applied Crossmarked				501845		5x B		6300.MW		-							
17				14		100mm											