

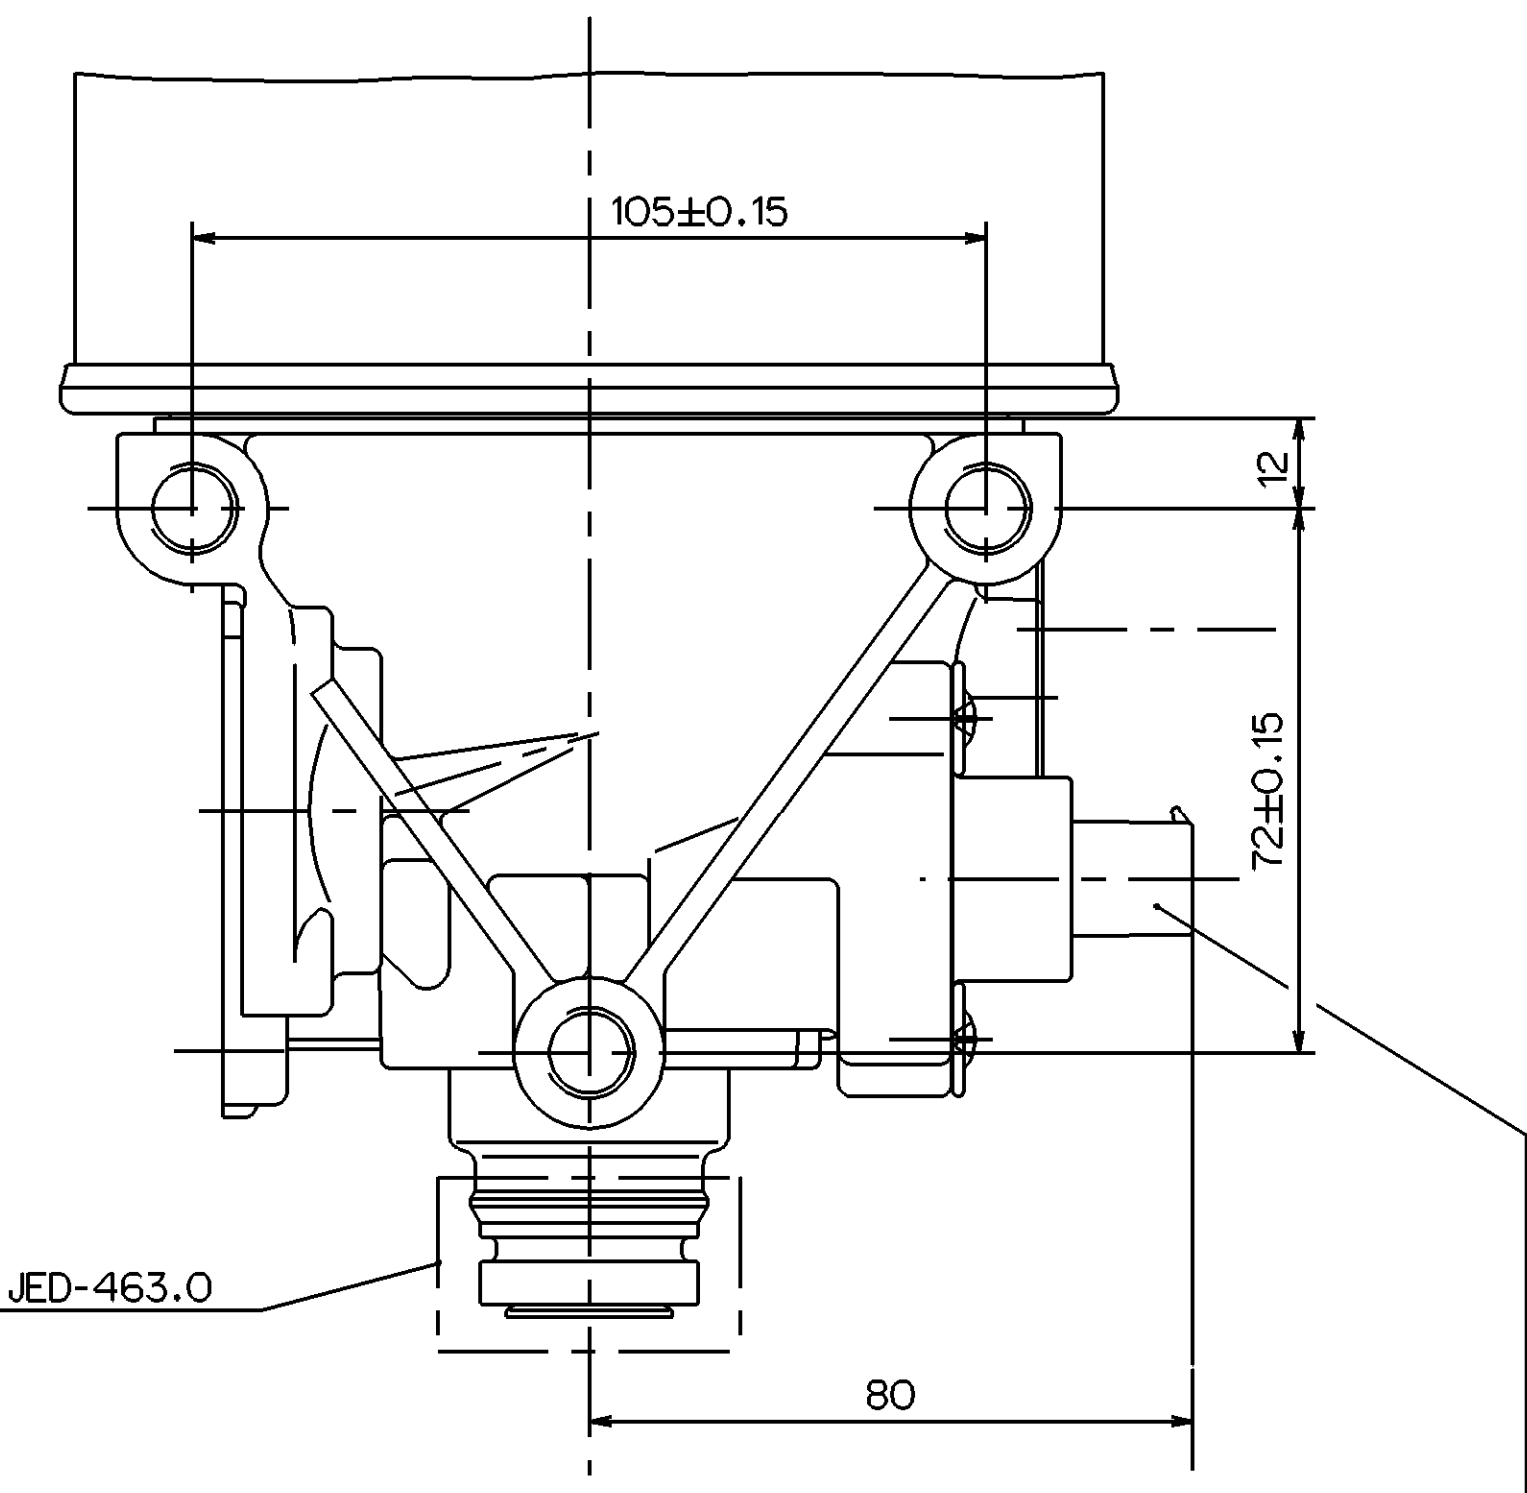
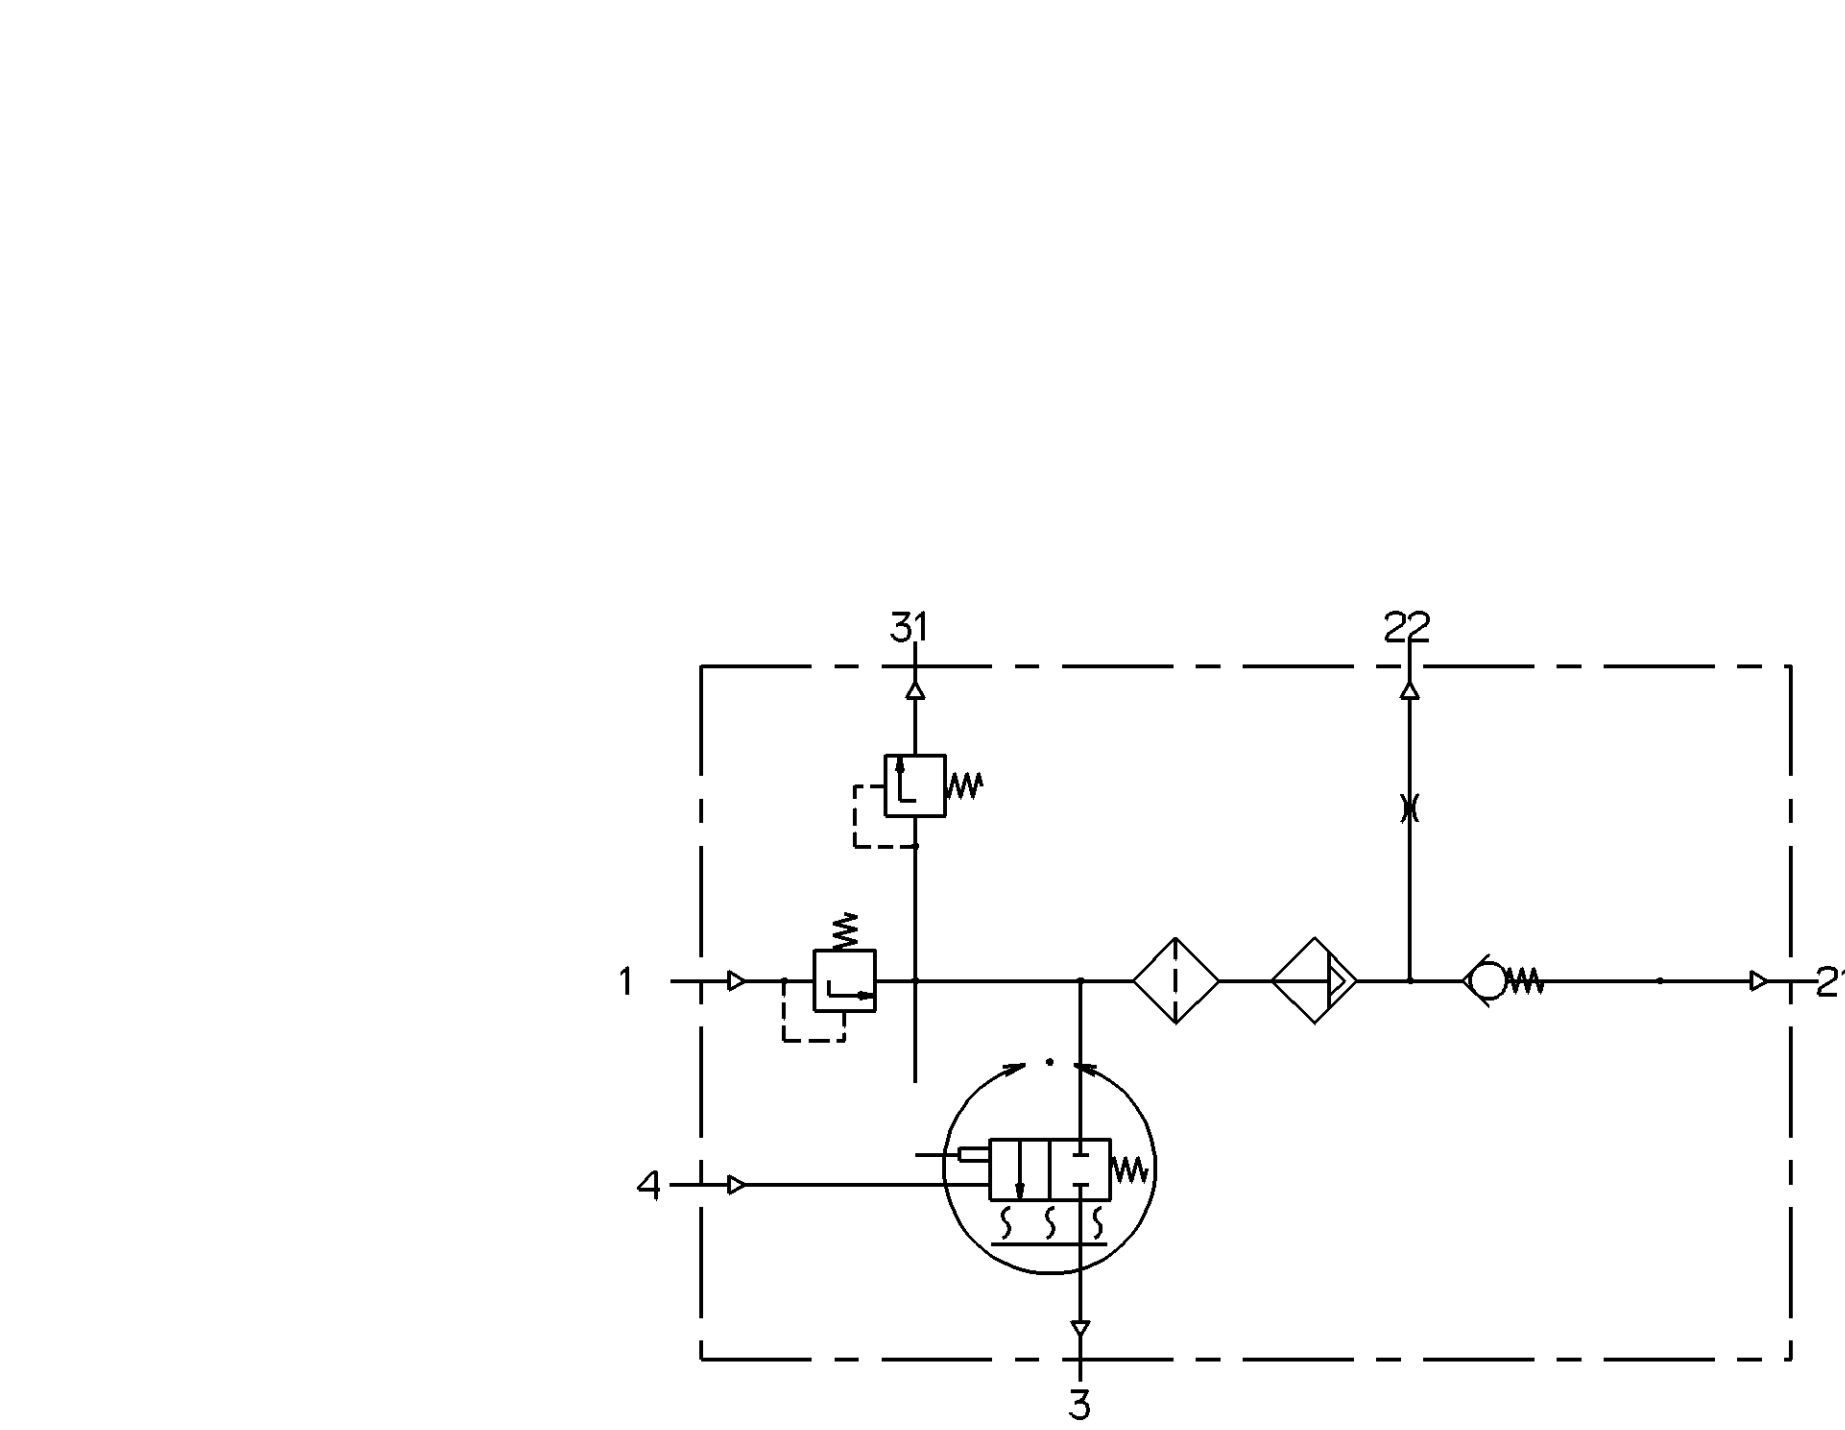
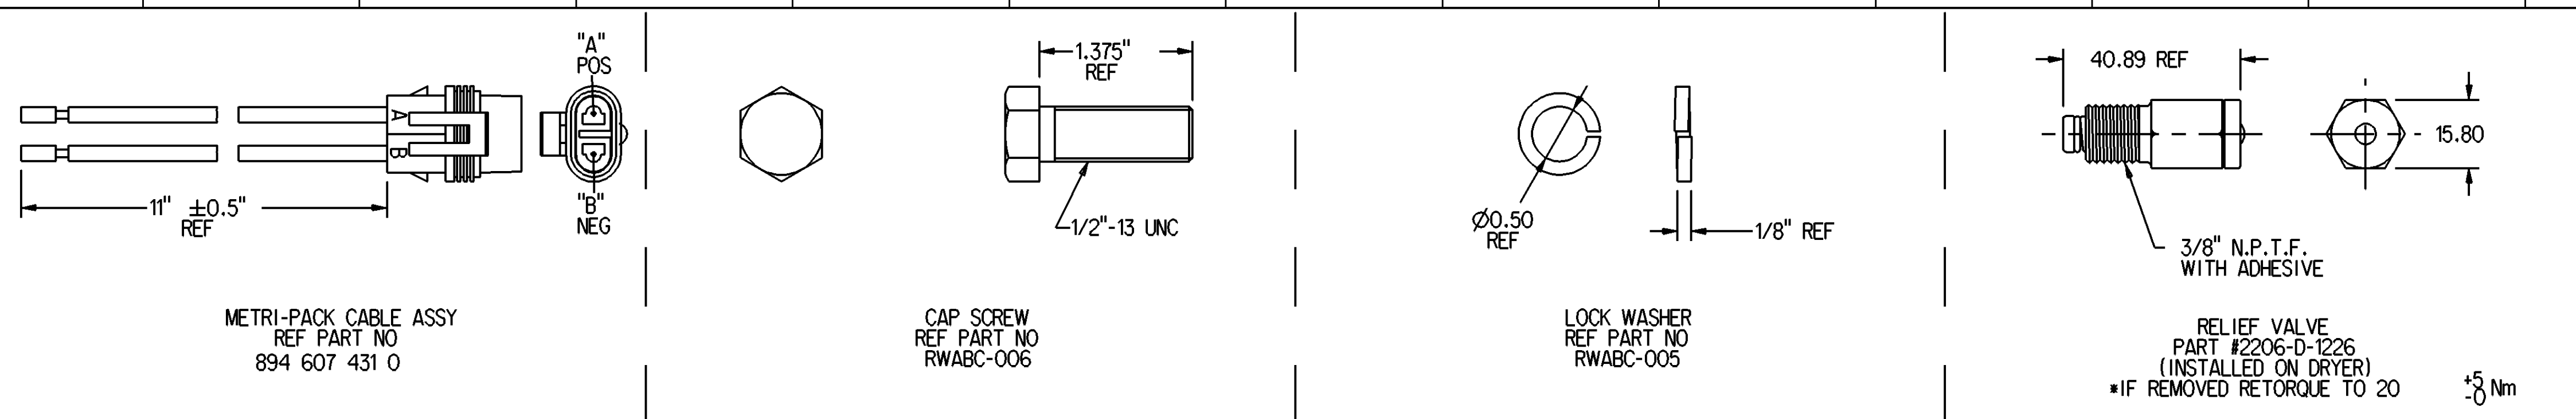
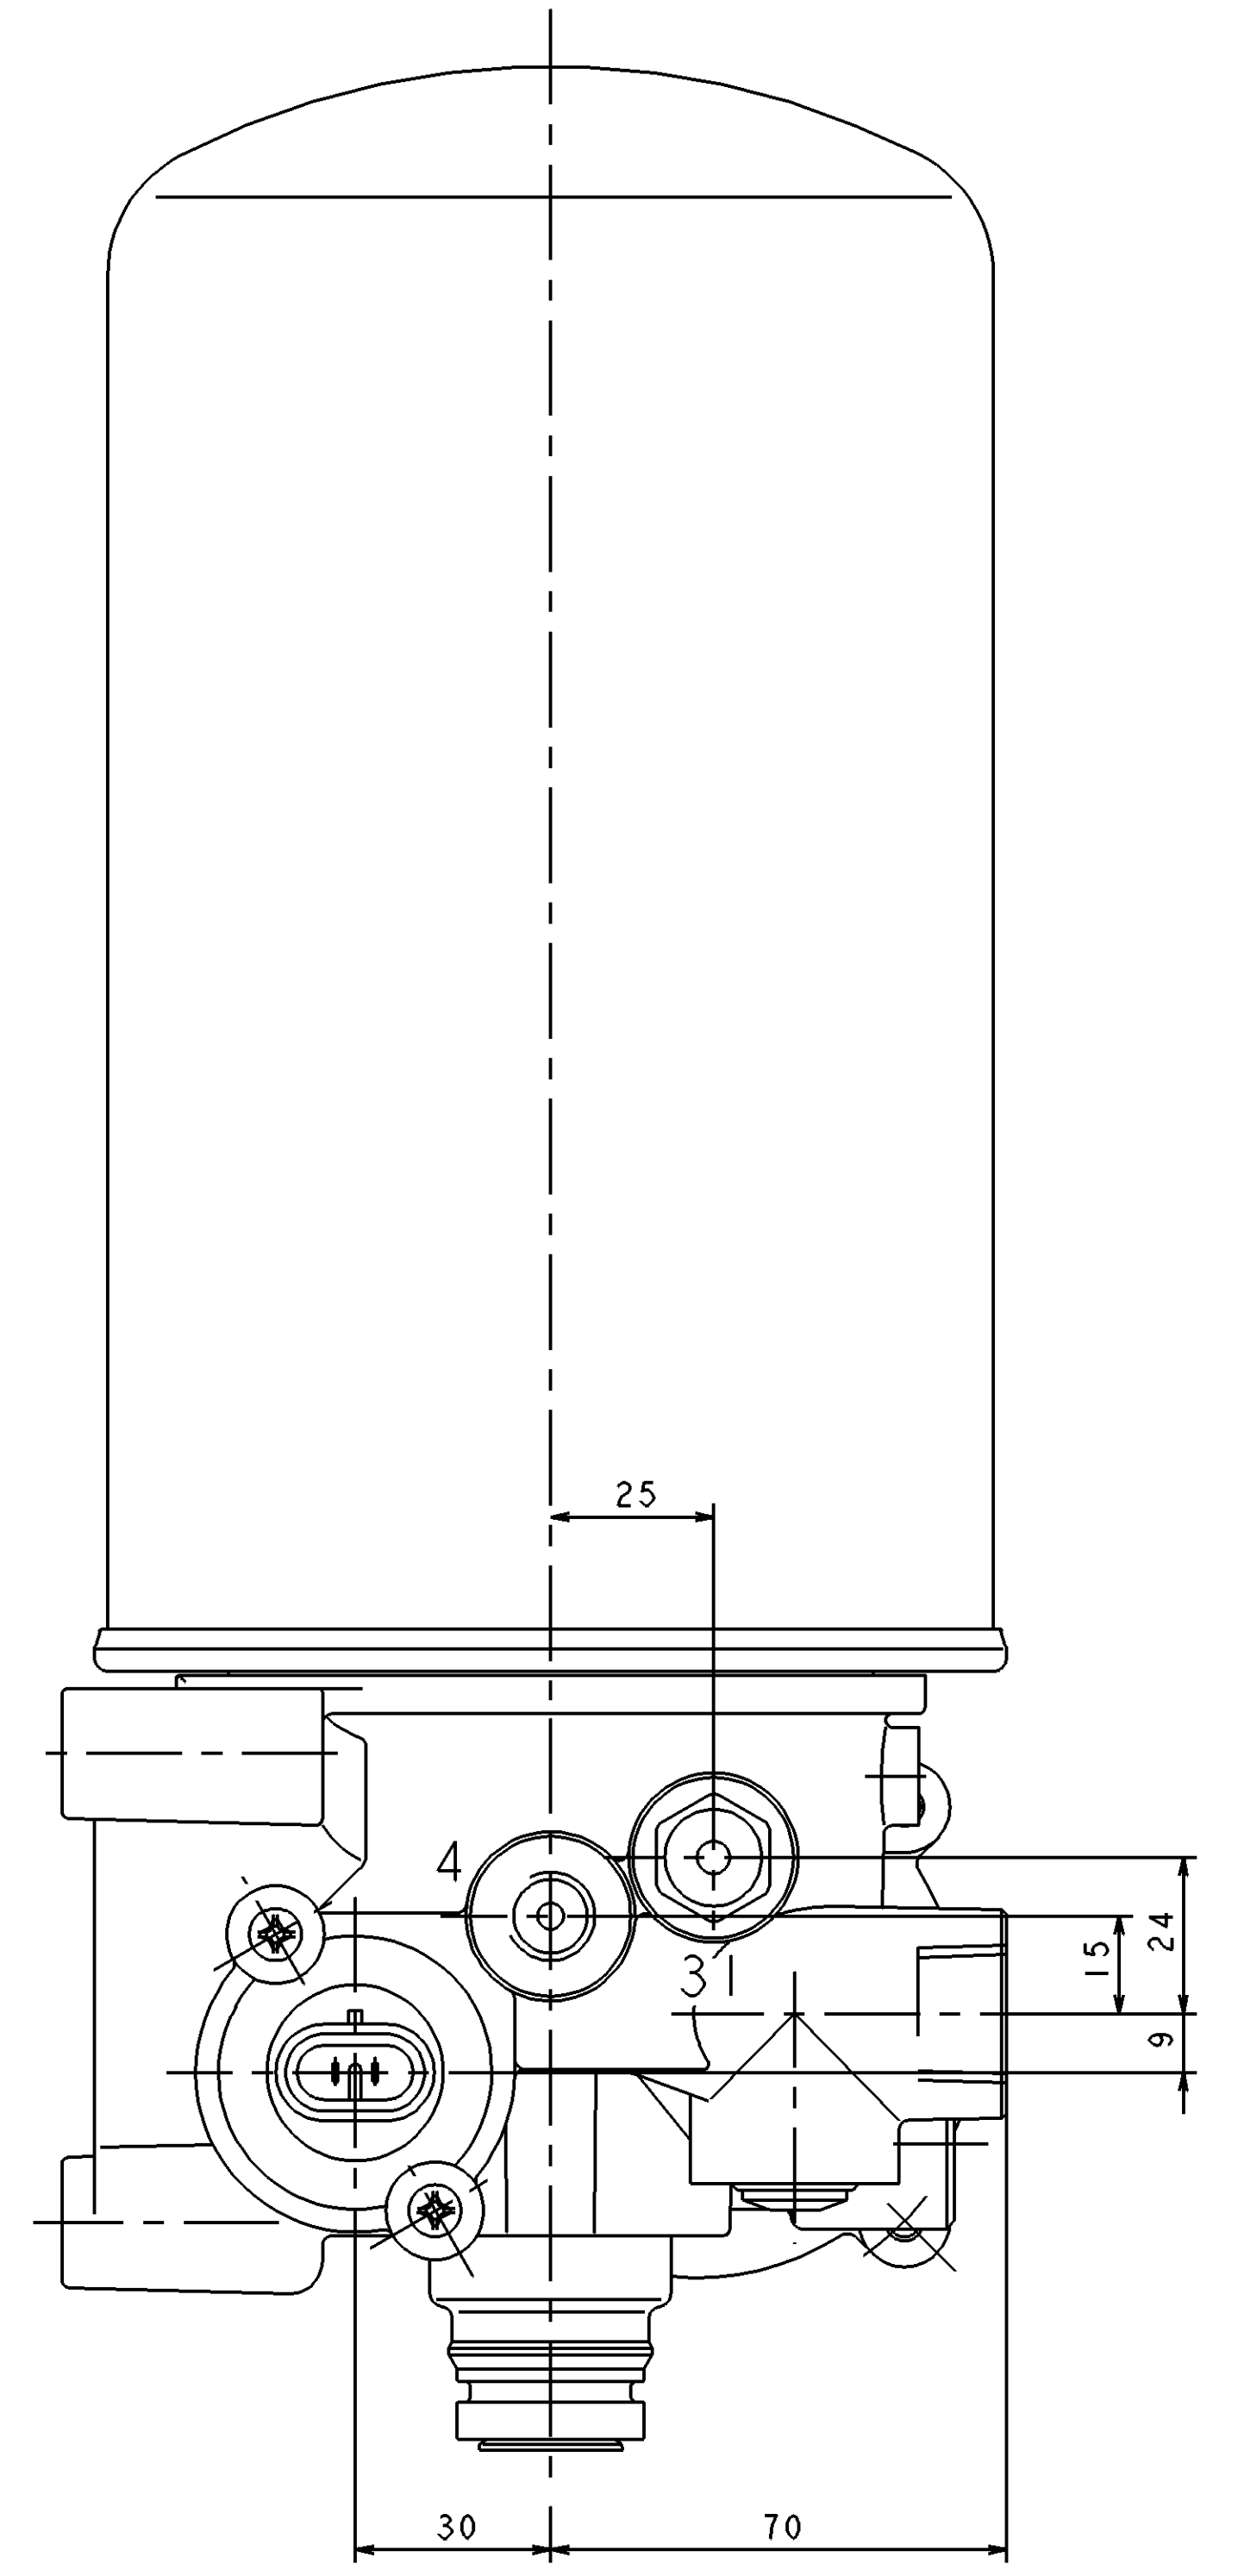


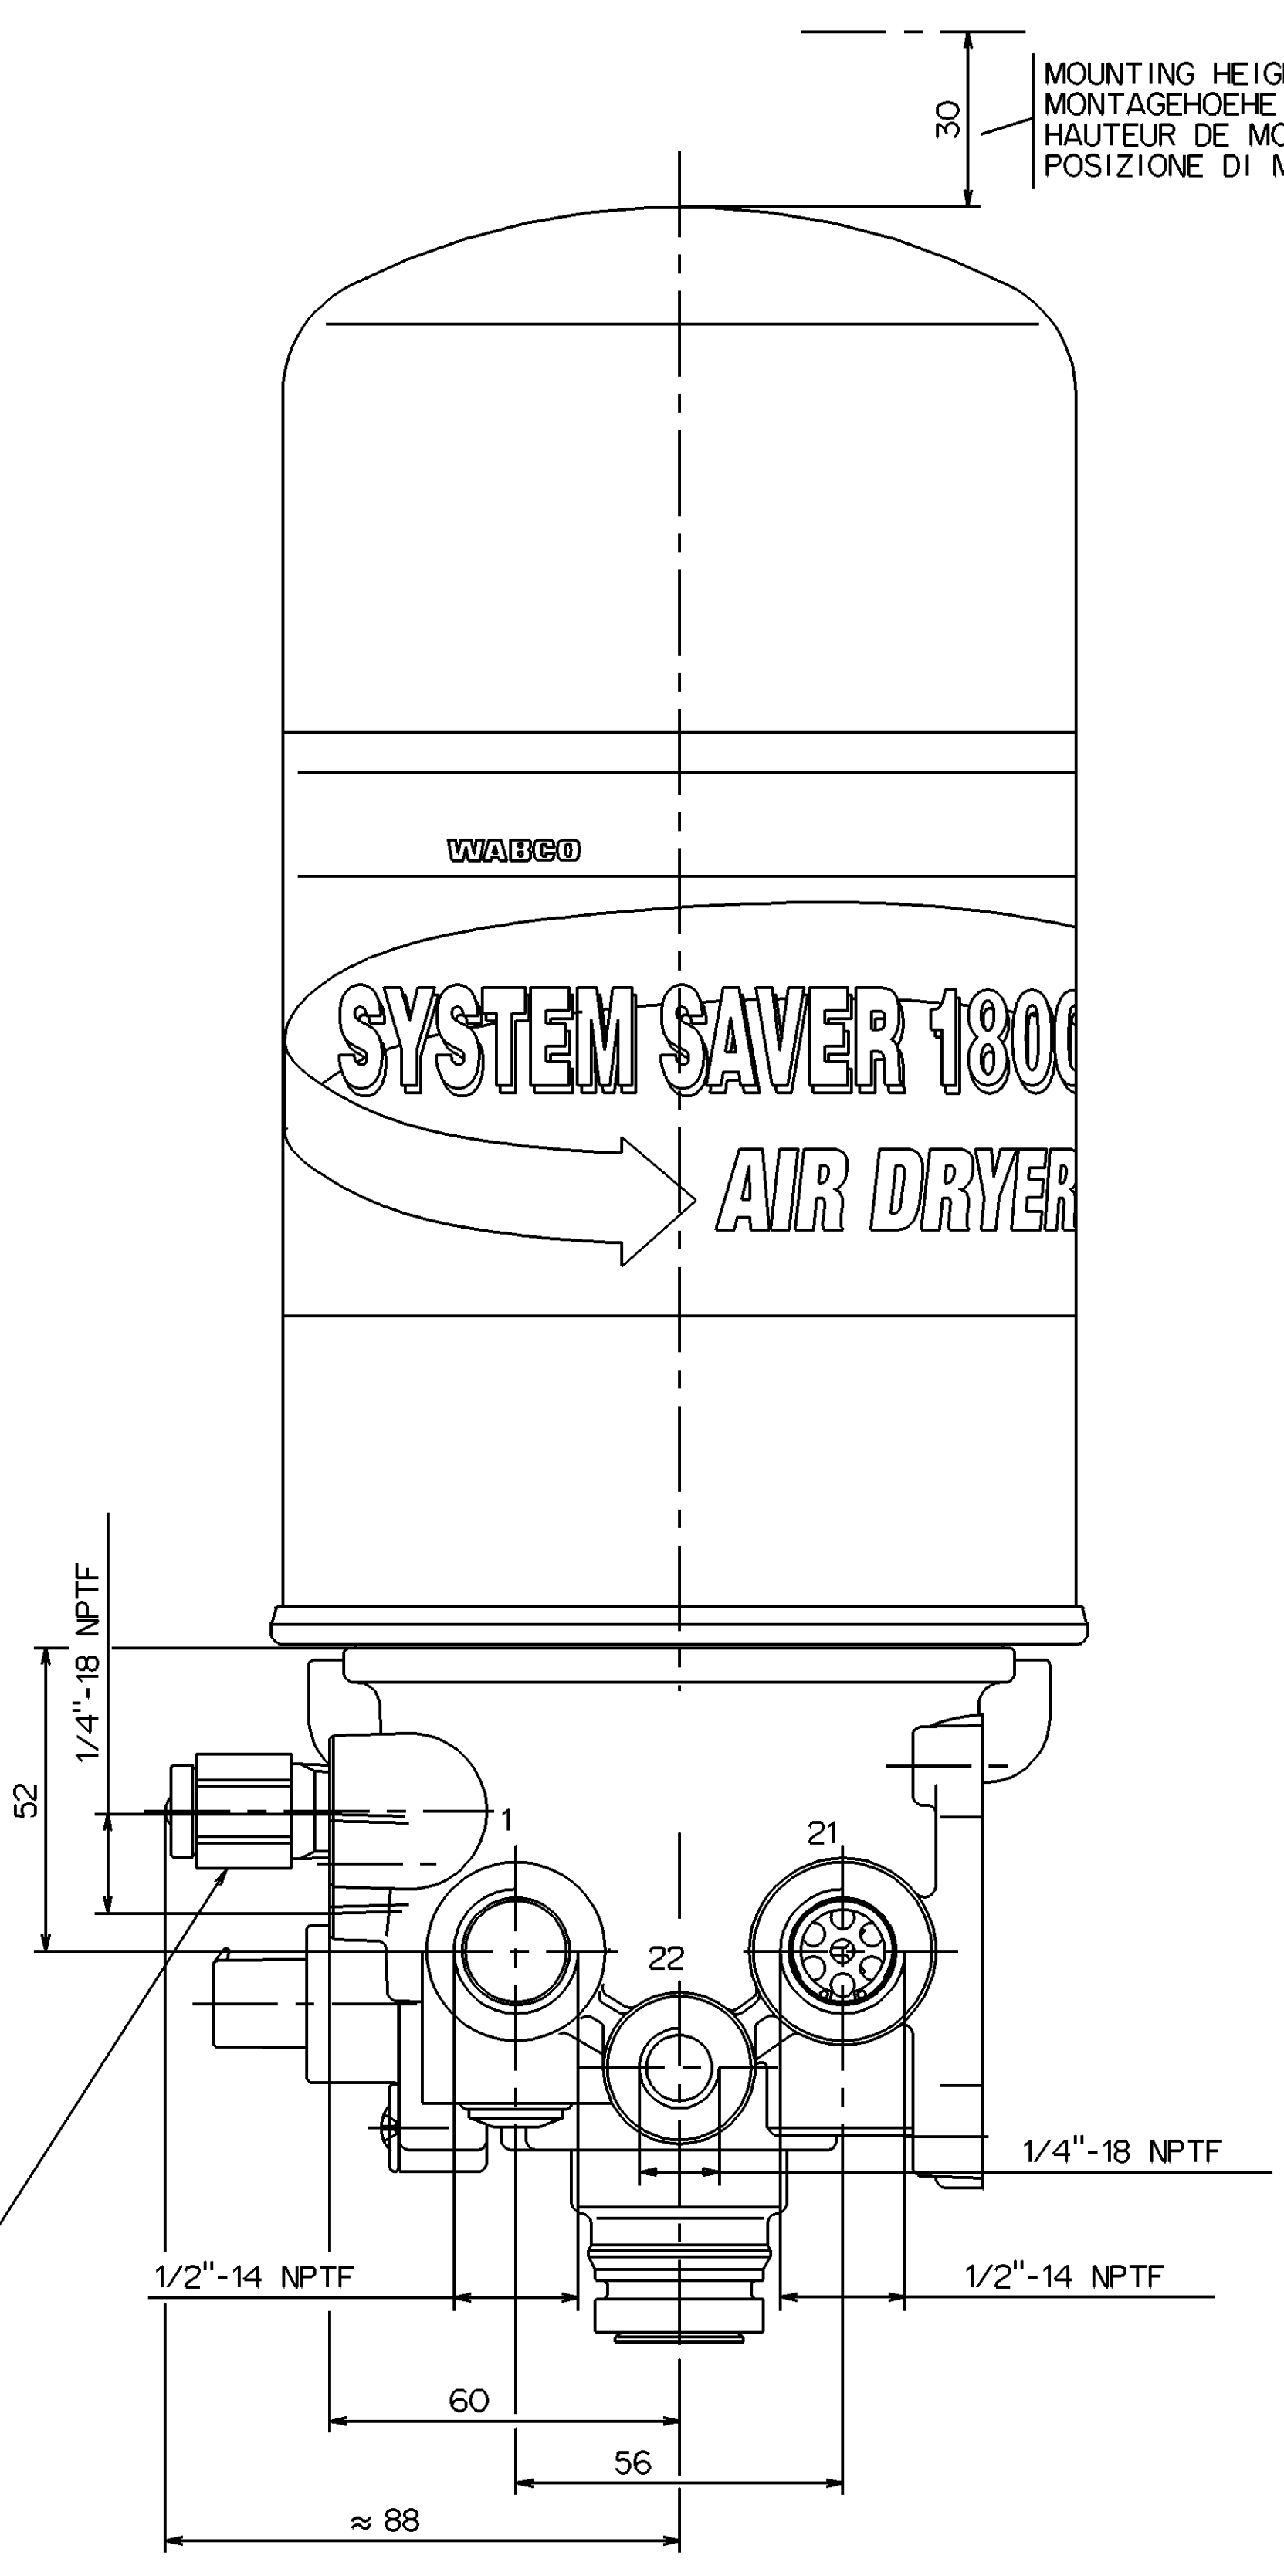

CONNECTOR
STECKER
CONNECTEUR
SPINA
280 METRI-PACK
NR. 1202 0599

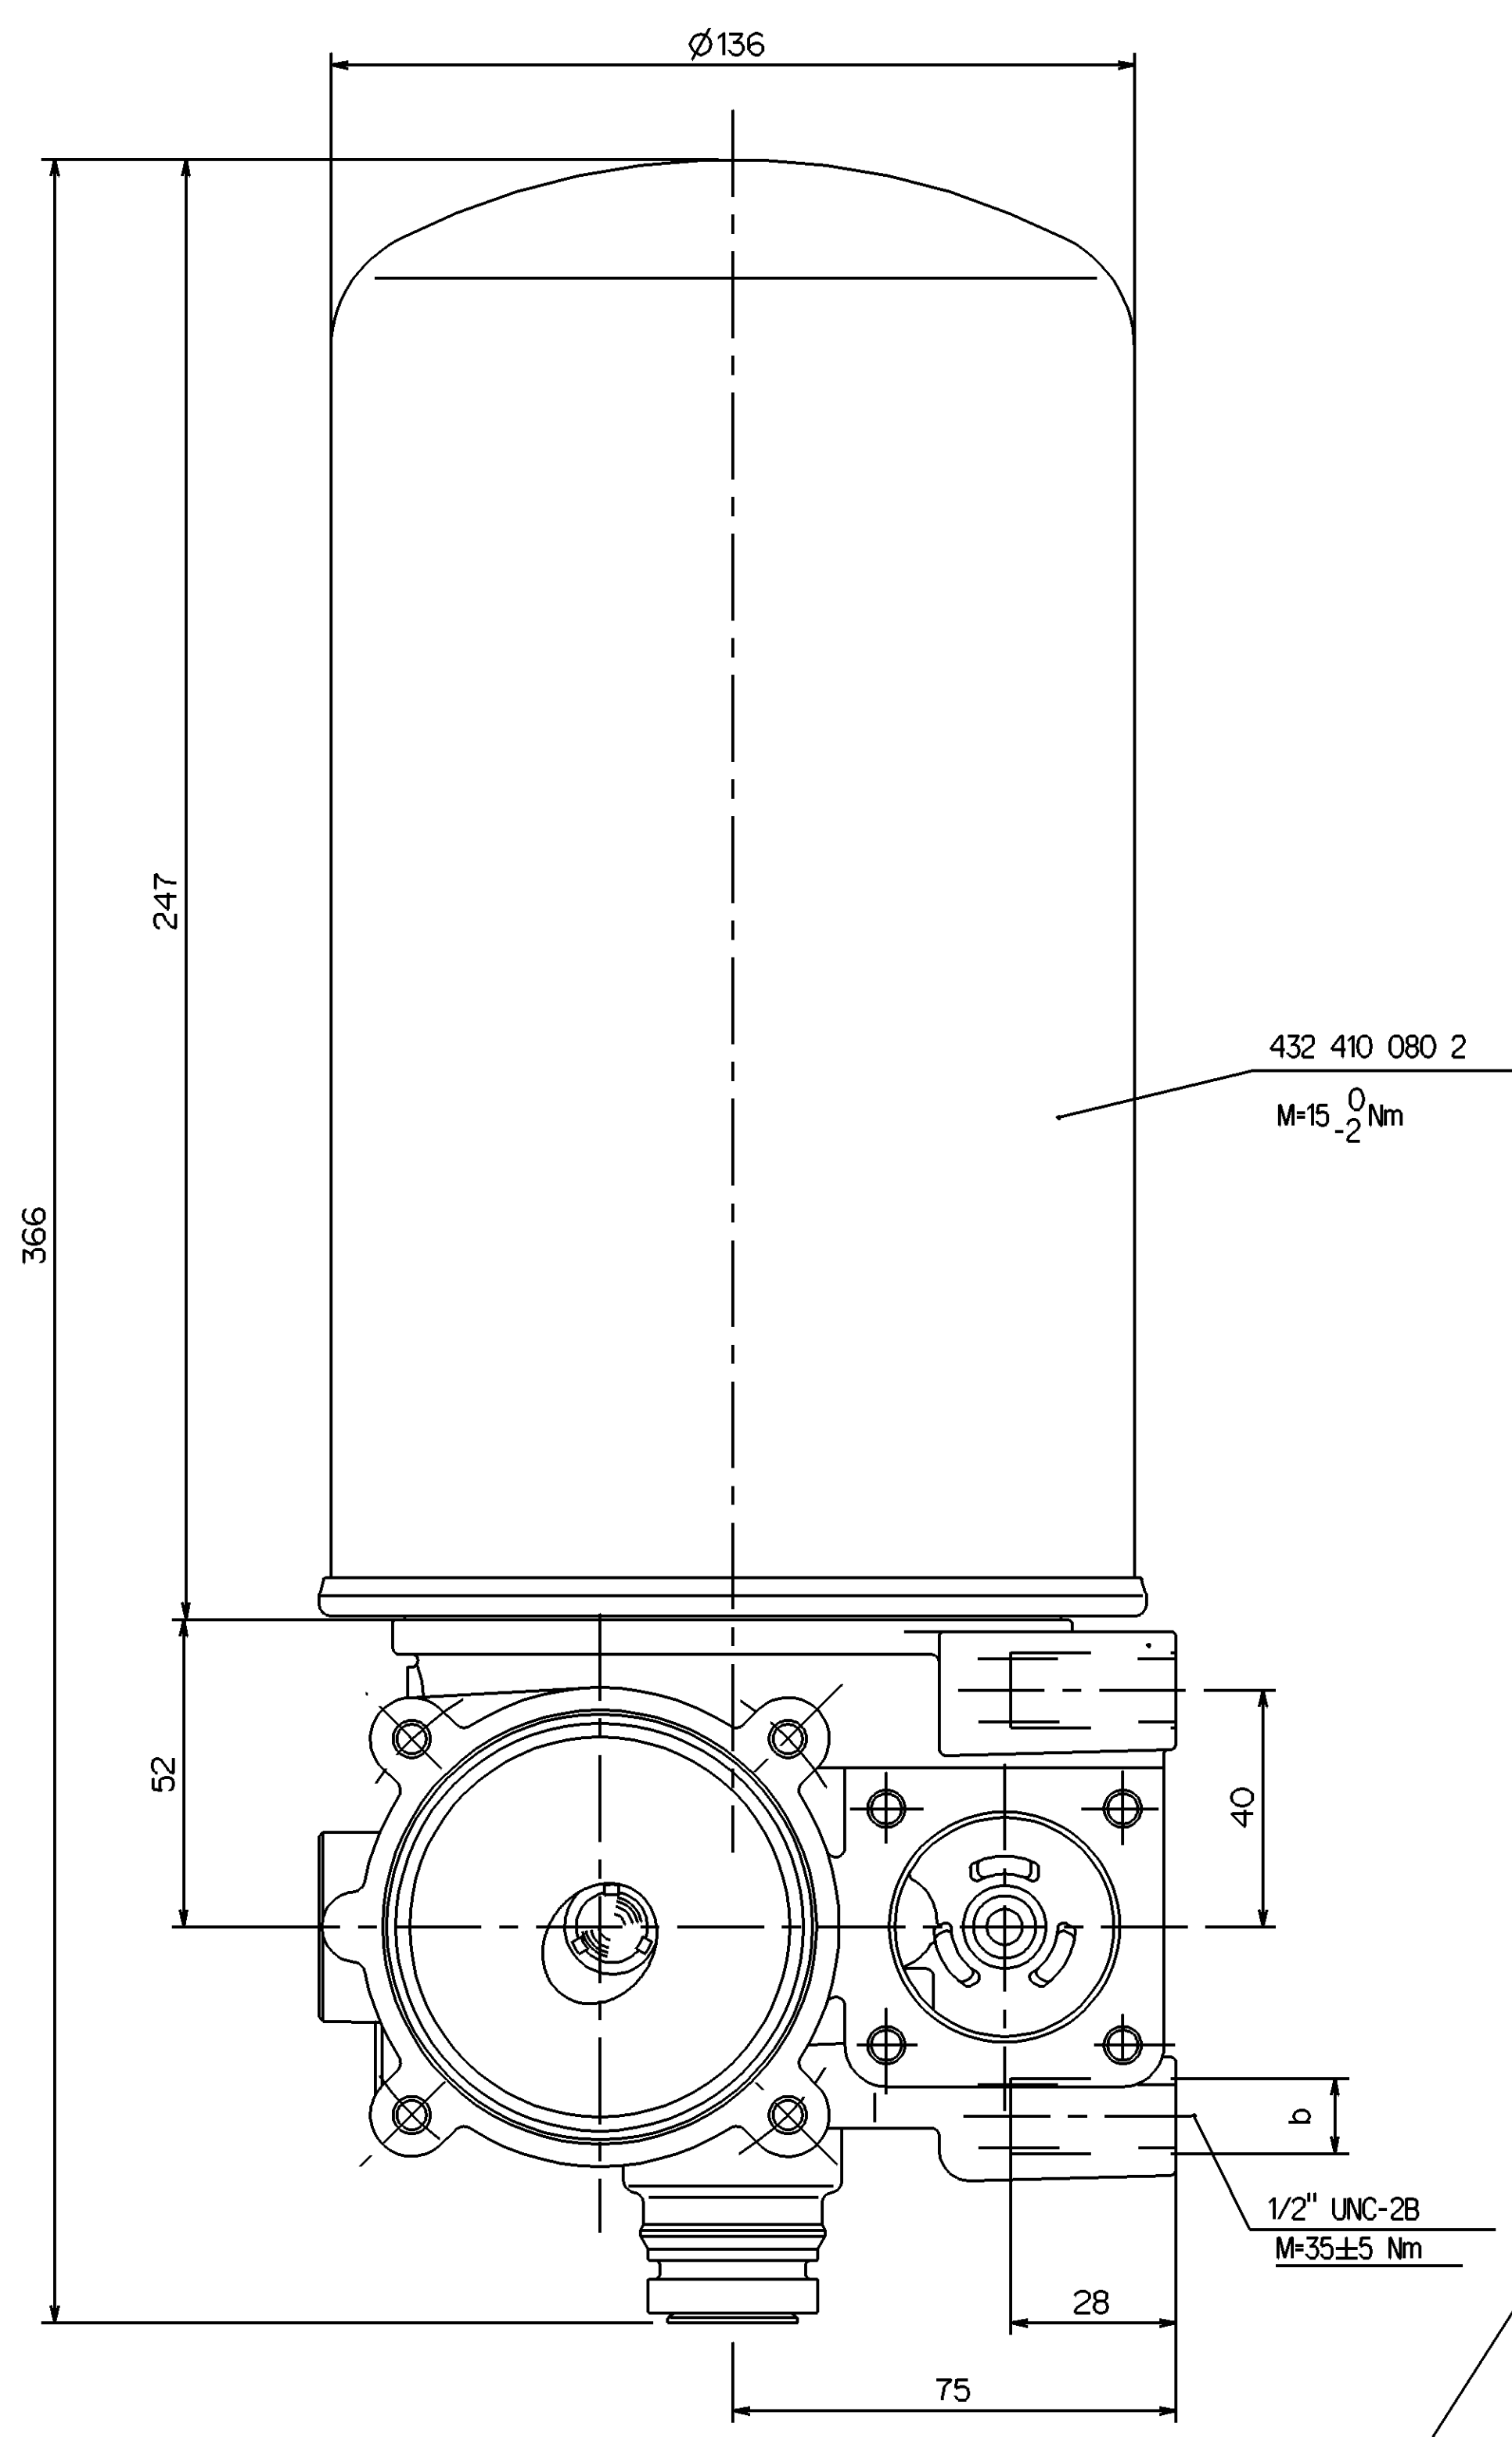

THERMAL RANGE OF CONTINUOUS APPLICATION
THERMISCHER DAUERANWENDUNGSBEREICH:
PLAGE DE TEMPERATURE EN UTILISATION CONTINUE: -40°C.....+80°C
COMPO DI APPLICAZIONE CONTINUA:

RESISTANCE TO HEAT:
WAERMEBESTAENDIGKEIT:
RESISTANCE A LA CHALEUR:
RESISTANZA AL CALORE:
MAX. +80°C

MEDIUM: COMPRESSED AIR
MEDIUM: DRUCKLUFT
FLUIDE: AIR COMPRIME
FLUIDO: ARIA COMPRESSA

WORKING PRESSURE:
BETRIEBSDRUCK:
PRESSION DE SERVICE:
PRESSIONE D'ESERCIZIO:
p_g max. = 9bar ± 130psi

INSTALLATION POSITION AS DRAWN
EINBAULAGE WIE GEZEICHNET
POSITION D'INSTALLATION SUIVANT DESSIN
POSIZIONE DI MONTAGGIO COME DISEGNATO

MAX. PERMISSIBLE ACCELERATION:
MAX. ZULAESSIGE BESCHLEUNIGUNG:
ACCELERATION MAX. ADMISSIBLE:
ACCELERAZIONE MAX. AMMESSA:
±10xg

MAX. PERMISSIBLE FREQUENCY
MAX. ZULAESSIGE FREQUENZ
MAX. ADMISSIBLE FREQUENZE
MAX. AMMISSIBLE FREQUENZA
50 Hz

TORQUE FOR CONNECTIONS:
ANZUGSMOMENT FUER EINSCHRAUBSTUTZEN:
COUPLE DE SERRAGE DES RACCORDS:
COPPIA DI SERRAGGIO DEI RACCORDI:
IN CASE OF GREASED THREAD
BEI GEFETTETEM GEWINDE
EN CAS DE FILETAGE GRAISSE
IN CASO DI FILETTATURA INGRASSATA

1/4"-18 NPTF M ≤30Nm
3/8"-18 NPTF M ≤30Nm
1/2"-14 NPTF M ≤50Nm

COMBINED UNLOADER: CUT OUT PRESSURE
DRUCKREGLER: ABSCHALTDRUCK
REGULATEUR DE PRESS.: PRESSION DE DECL.
GRUPPO DI REGOLAZIONE: PRESSIONE D'APERT.
≥7.9bar....≤9bar
≥115psi....≤130psi

HEATING:
HEIZUNG:
CHAUFFAGE:
RISCALDAMENTO:

CUT-IN TEMPERATURE
EINSCHALT-TEMPERATUR
TEMPERATURE DE FERMETURE
TEMPERATURA DI CHIUSURA
7°±6°C

BATTERY VOLTAGE:
BATTERIESPANNUNG:
TENSION DE BATTERIE:
TENSIONE DI BATTERIA:
12 ±4 V DC
24 ±4.8 V DC

POWER:
LEISTUNG:
PUISSANCE:
POTENZA:
100 W
WITHOUT CURRENT
STROMLOS
SANS COURANT
SENZA CORRENTE

CUT-OFF TEMPERATURE
AUSSCHALT-TEMPERATUR
TEMPERATURE DE MISE
TEMPERATURA DI APERTURA
29.5°±3°C

12 V DC / 24 V DC
95 ±5 W
WITH
BEI
AVEC
CON

PURGE VALVE SAFETY RELIEF PRESSURE
SICHERHEITSDRUCK DES LEERLAUFVENTILES BEI V₁ : V₁ = 100dm³ ±25bar ±363psi


SAFETY VALVE
SICHERHEITSVENTIL
SOUPAPE DE SECURITE
VALVOLA DI SICUREZZA

OPENING PRESSURE :
OEFFNUNGSDRUCK :
PRESSION D'OUVERTURE :
PRESSIONE DI APERTURA :
p_g = 12.8 ±1 bar
±185 ±15 psi

APPLIED ACROSS THE HEATER CONTACTS
DIREKT AN DEN HEIZUNGSKONTAKTEN
APPLIQUEE SUR LES CONTACTS DE CHAUFFAGE
APPLICATA SULLE CONTATTI DI RISCALDAMENTO

- 1 FROM THE COMPRESSOR
VOM LUFTPRESSER
PROVENANT DU COMPRESSEUR
PROVENIENTE DEL COMPRESSORE
- 21 TO THE RESERVOIRS
ZU DEN LUFTBEHAELTERN
AUX RESERVOIR
AL SERBATOII PER
- 3 EXHAUST FOR COMPRESSED AIR
ENTLUFTUNG FUER DRUCKLUFT
ECHAPPEMENT POUR AIR COMPRI ME
SCARIO PER ARIA COMPRESSA
- 31 EXHAUST OF THE SAFETY VALVE
ENTLUFTUNG DES SICHERHEITSVENTILES
ECHAPPEMENT DE LA SOUPAPE DE SECURITE
SCARICO DELLA VALVOLA DI SICUREZZA
- 4 CONTROL PORT
STEUERANSCHLUSS
ORIFICE DE COMMANDE
ORIFIZIO DI COMANDO
- 22 TO RESERVOIR FOR REGENERATION AIR
ZUM REGENERATIONS-LUFTBEHAELTER
AU RESERVOIR D' AIR DE REGENERATION
AL SERBATOII PER L' ARIA RIGENERATA

---	---	YES	NO	NO	NO	24V	P	432 421 022 0	432 413 065 0	
---	---	YES	YES	YES	YES	24V	P	432 421 022 0	432 413 064 0	
---	---	YES	NO	NO	NO	12V	P	432 421 021 0	432 413 063 0	
---	---	YES	YES	YES	YES	12V	P	432 421 021 0	432 413 062 0	
---	---	YES	NO	NO	NO	24V	UP	432 421 020 0	432 413 061 0	
---	---	YES	YES	YES	YES	24V	UP	432 421 020 0	432 413 060 0	
---	---	YES	NO	NO	NO	12V	UP	432 421 019 0	432 413 059 0	
---	---	YES	YES	YES	YES	12V	UP	432 421 019 0	432 413 058 0	
1.1/16	9.0/130.5	YES	NO	NO	NO	24V	PG	432 421 018 0	432 413 057 0	
1.1/16	9.0/130.5	YES	YES	YES	YES	24V	PG	432 421 018 0	432 413 056 0	
1.1/16	9.0/130.5	YES	NO	NO	NO	12V	PG	432 421 017 0	432 413 055 0	
1.1/16	9.0/130.5	YES	YES	YES	YES	12V	PG	432 421 017 0	432 413 054 0	
OPERATING RANGE (±0.3 BAR/±4.4 PSI)		CUT OUT PRESSURE (±0.2 BAR/±2.9 PSI)	RELIEF VALVE (1ea)	WIRING HARNESS (1ea)	WASHERS (3ea)	BOLTS (3ea)	VOLTAGE	DESC	BASE DRYER	KIT NUMBER

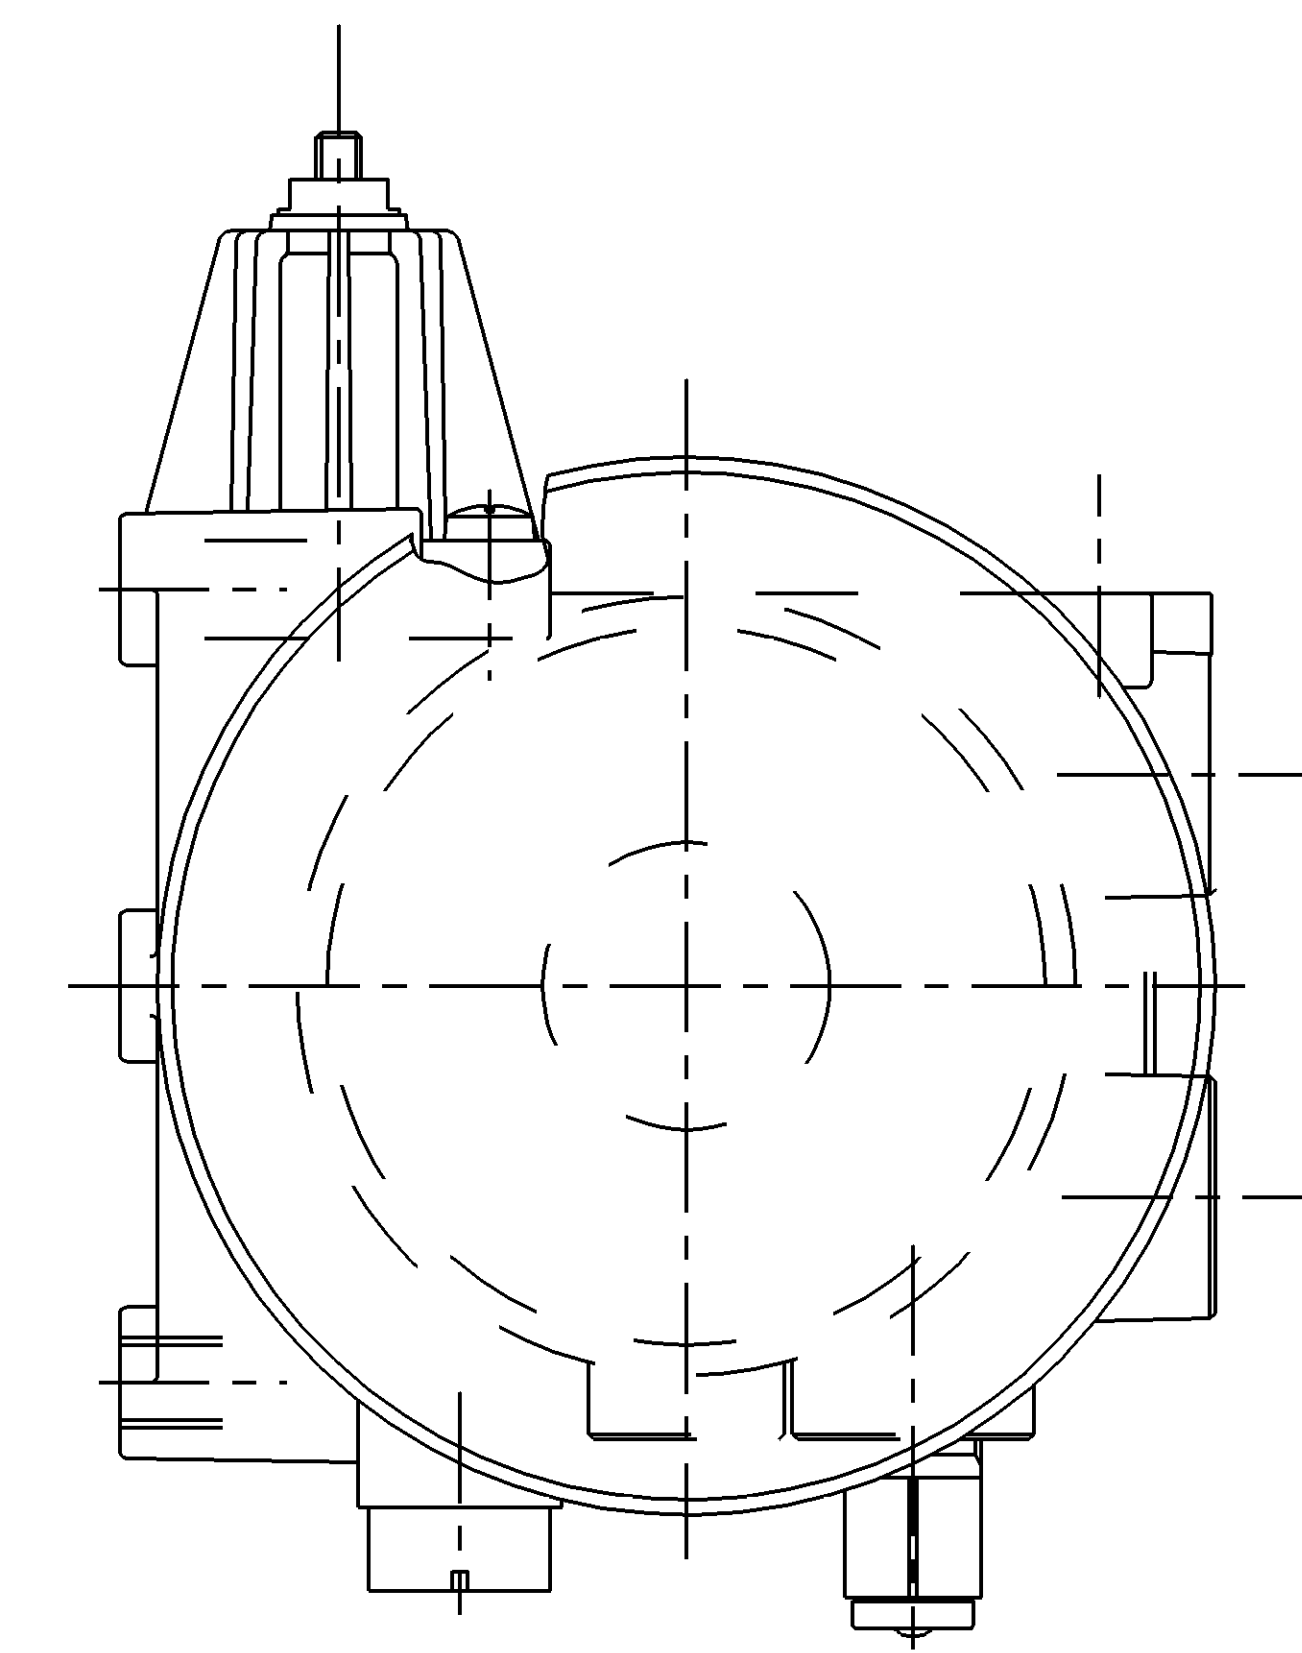

THIRD ANGLE PROJECTION

General Specifications: SS1800-P, Size 150 14400 LP		Copyright WABCO		Further Technical Data		Date: 2021-05-25		Sheet: 1 of 1		Doc. Code: 432 413 908 0		Revision: 053		Language: ML		Sheet: 1/1					
General Information: SS1800 PG, UP, P INSTALLATION KITS		Date: 2021-05-25		Drawn: Sulfon		Checked: Zingirski		Expert:		Material No.: 432 413 908 0		Date of first issue: 2000-05-15		Doc. Code: 432 413 908 0		Revision: 053		Language: ML		Sheet: 1/1	
Class: 11		Range of Rated Dimensions (L x D x H): 50 x 180 x 400		Mass: 10		Scale: 1:1		CAD System: A 0 CREO		E3D-File: S08278		Revision: 2		Tech. Resp: F		Replacement for: S0500_MW					
Tapped Holes: 2.0		Range of Rated Dimensions (L x D x H): 50 x 180 x 400		Mass: 10		Scale: 1:1		CAD System: A 0 CREO		E3D-File: S08278		Revision: 2		Tech. Resp: F		Replacement for: S0500_MW					