

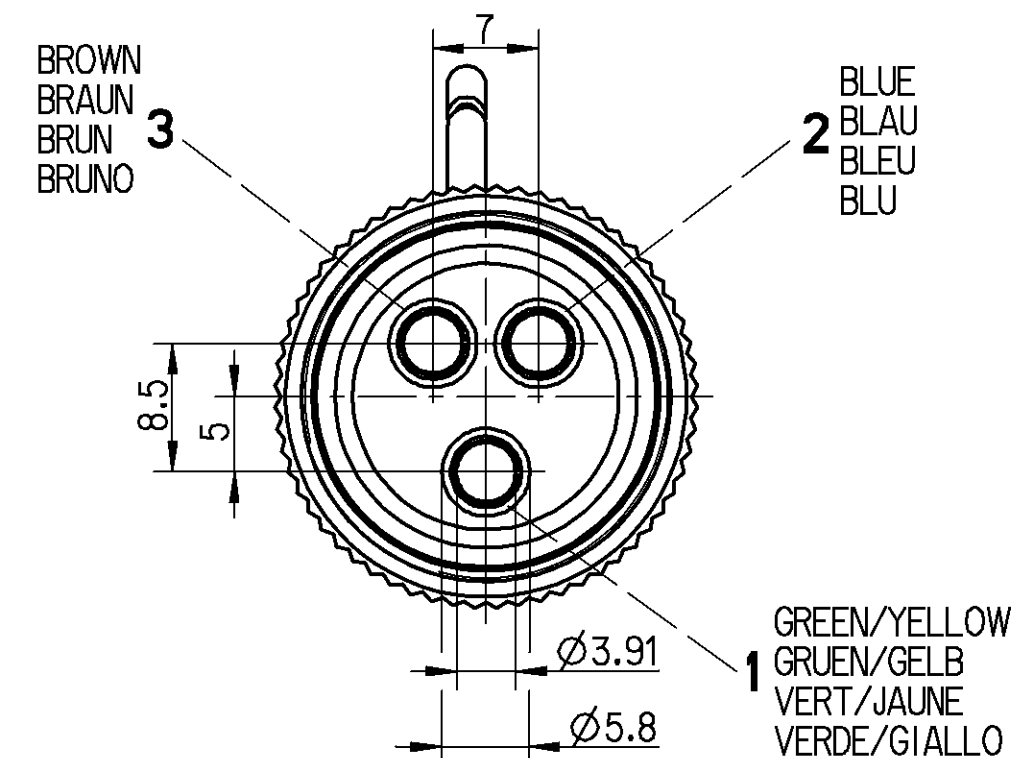


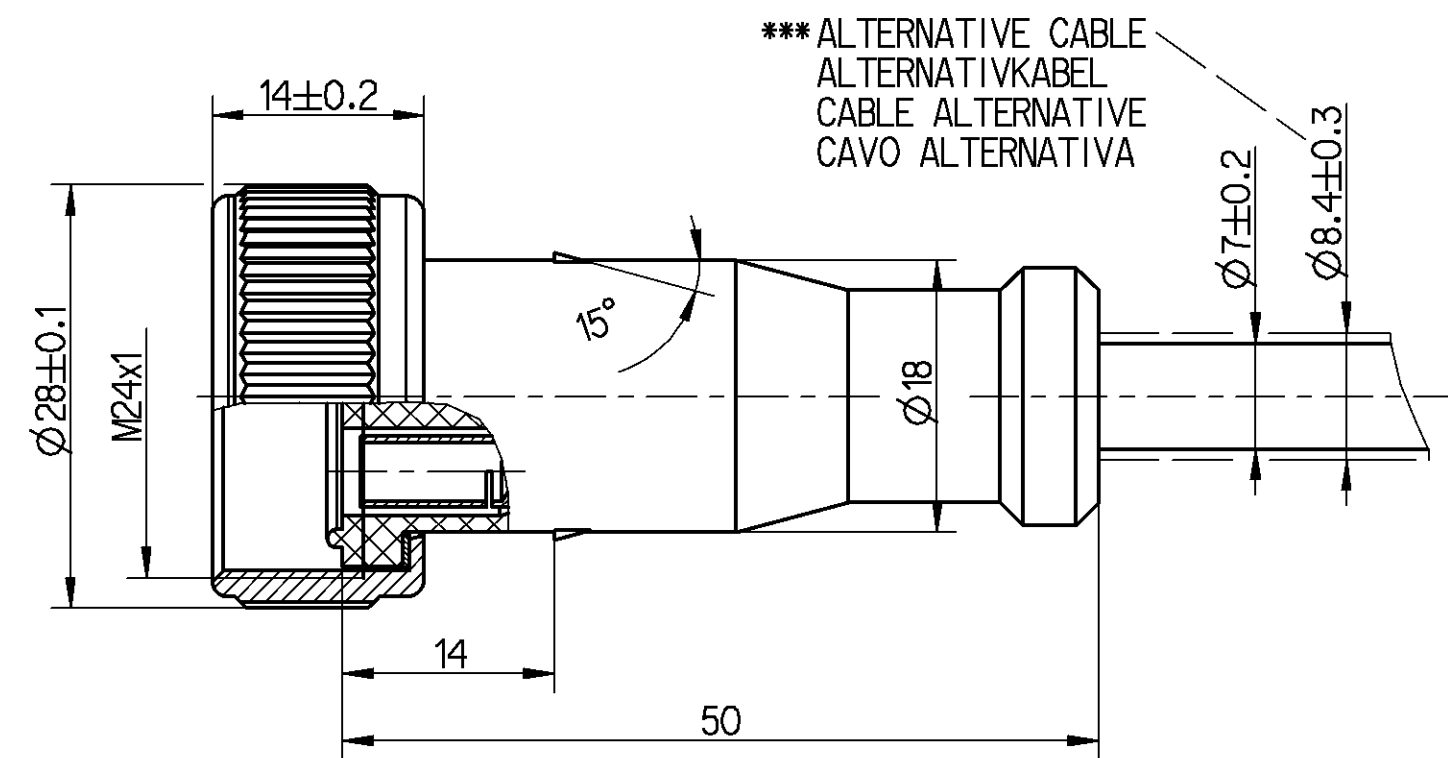

CODE OF LENGTH LAENGENCODIERUNG CODE DE LA LONGUEUR CODICE DEL LUNGHEZZA	
PART NO TEILE NR. NO DE PIECE CODICE	L[m] 449 511 , 0
EXAMPLE BEISPIEL EXEMPLE ESEMPIO	L = <u>12</u> m 449 511 <u>12</u> 0
MIN/MAX LENGTH MIN/MAX LAENGE MIN/MAX LONGUEUR MIN/MAX LUNGHEZZA	$L_{\min} = 0.1\text{m}$ $L_{\max} = 20\text{m}$
TOLERANCES TOLERANZEN TOLERANCES TOLERANZA	$L < 10\text{m} \pm 0.050\text{m}$ $L > 10\text{m} \pm 0.075\text{m}$

ALTERNATIVE STAMP PERMISSIBLE
AUFDRUCK ALTERNATIV ZULAESSIG ***
MARQUAGE ALTERNATIVE ADMISSIBLE
STAMPIGLIATURA ALTERNATIVA AMMESSA

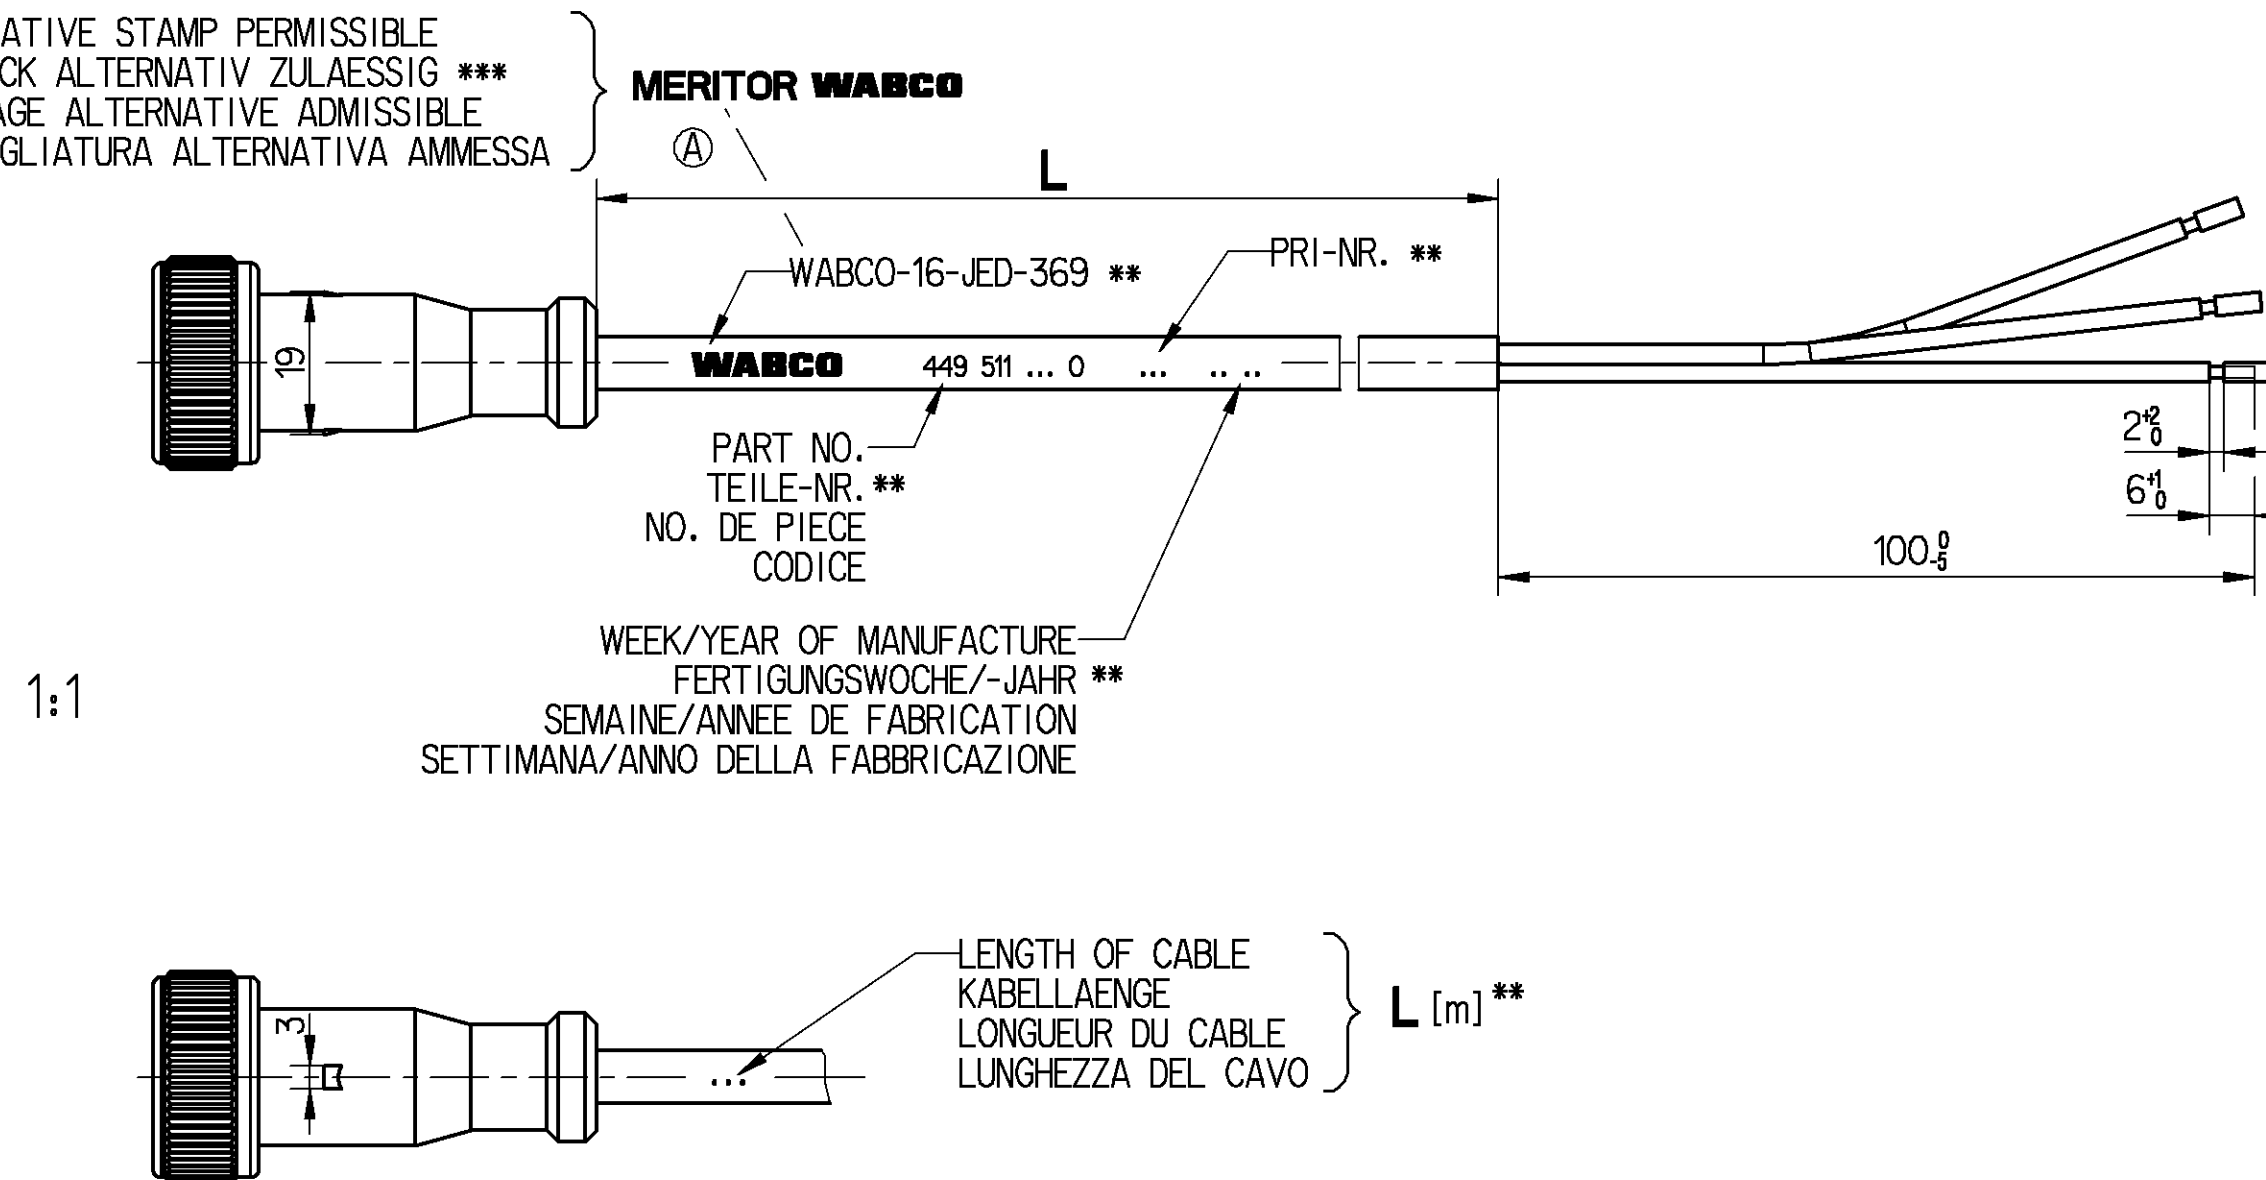

**** ABRASION RESISTANT PRINT**
ABRIEBFESTER AUFDRUCK
IMPRESSION RESISTANTE A L' ABRASION
IMPRONTA RESISTENTE ALL' ABRASIONE

} RAL 9001

THREE CORE CABLE
LEITUNG DREIADRIG
CABLE A TROIS CONDUCTEURS
CAVO A TRE CONDUTTORI

} PUR
3x1.5mm²

THERMAL RANGE OF APPLICATION
 THERMISCHER ANWENDUNGSBEREICH
 GAMME D'APPLICATION THERMIQUE
 CAMPO TERMICO D'APPLICAZIONE


} -40 °C...+80 °C

RESISTANT TO	}	AIR, WATER, MINERAL OIL, PETROL, DIESEL OIL, SALT SPRAY
BESTÄNDIG GEGEN		LUFT, WASSER, MINERALÖL, BENZIN, DIESELÖL, SALZSPRÜHNEBEL
RESISTANT A		AIR, EAU, HUILE MINÉRALE, ESSENCE, GASOIL, BROUILLARD SALIN
RESISTENTE A		ARIA, AQUA, OLIO MINERALE, BENZINA, GASOLIO, NEBBIA SALINA

TYPE OF PROTECTION (IN CONNECTION WITH PLUG)	}	IP68 EN 60529/IEC 529
SCHUTZART (IN VERBINDUNG MIT STECKER)		
MODE DE PROTECTION (DANS CONNECTION AVEC FICHE)		
TIPO DI PROTEZIONE (IN RELAZIONE CON SPINA)		

FURTHER TECHNICAL DATA SEE PRODUCT SPECIFICATION
WEITERE TECHNISCHE DATEN SIEHE PRODUKT SPEZIFIKATION
POUR AUTRES DONNEES TECHNIQUES VOIR PRODUCT SPECIFICATION
PER ULTERIORI DATI TECNICI VEDERE SPECIFICA DI PRODOTTO

* DIN 16901-150

GENERAL SPECIFICATION: JED-334.0 *							Pro/ENGINEER DRAWING COPYRIGHT		WABCO CABLE WITH SOCKET KABEL MIT GERAETESTECKDOSE CABLE AVEC PRISE DE COURANT CAVO CON PRESA DI CORRENTE							
FURTHER TECHNICAL DATA:							DATE						SIGNATURE			
DOC. CODE:		SHEET: TO					DRAWN						98-07-28 HARNISCHM.			
GENERAL TOLERANCES							CHECKED						98-07-28 HOFELER			
		RANGE OF NOMINAL DIMENSIONS (± mm)						EXPERT CODE								
CLASS	1)	≤ 50	> 50 ≤ 180	> 180 ≤ 400	> 400			7 6 0								
FINE		0.5	1.0	1.5	2.0	±3°		MASS		SCALE	PRODUCT IDENTIFICATION NO.					
MEDIUM		1.0	2.0	3.0	4.0				/		2:1 1:1	449 511 000 0				
COARSE		2.0	3.5	5.0	6.5				KG							
TAPPED HOLES ACC. ISO 4039 / JED-152						064094	1x A	98-07-28	SIZE		TRI					
1) TOLERANCE CLASS APPLIED CROSSMARKED						DCN-NO.	REV.	DATE	A 2		141					
												FUNCTION CODE	SHAPE CODE	PRODUCT TYPE	REPLACEMENT FOR	
														1 1	449 511 000 0/95-08-10	