



5-22 AWG WIRES STRIPPED & TINNED
 RED(+) - POWER, COLOR 1
 WHITE(+) - POWER, COLOR 2
 GRAY(+) - REVERSE
 YELLOW - SYNC
 BLUE(-) - FLASH PATTERN SELECT

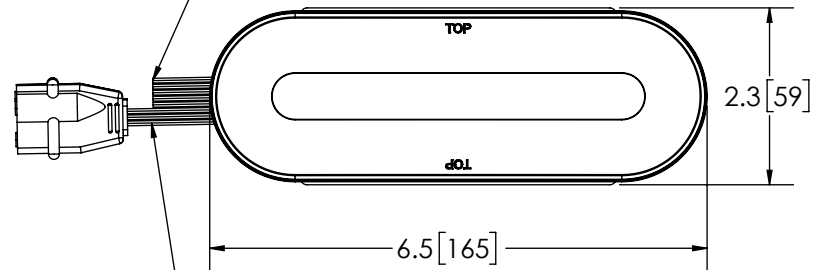

3-22 AWG WIRES W/ CONNECTOR
 PIN 1 - GROUND(-) WHITE W/ BLACK STRIPE
 PIN 2 - TAIL (+) BROWN
 PIN 3 - STOP/TURN(+) RED W/ WHITE STRIPE

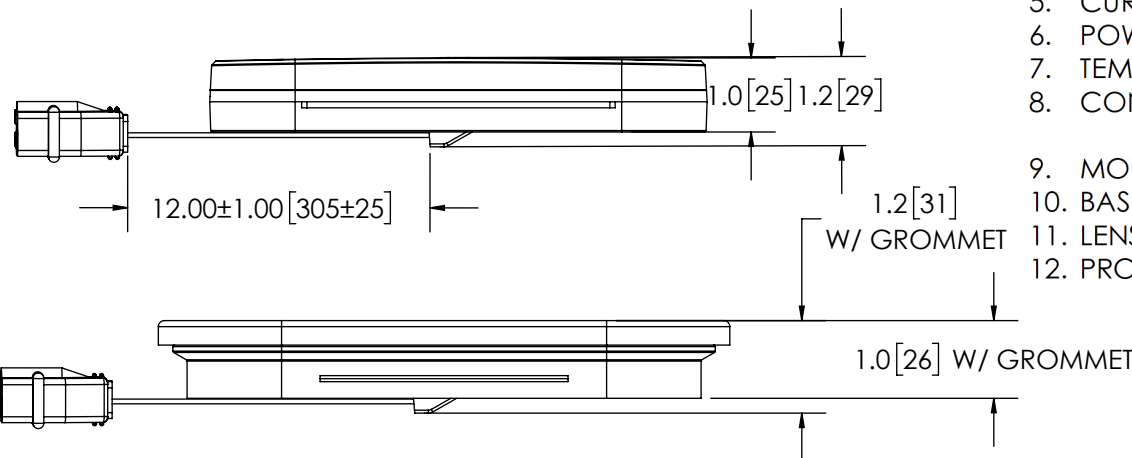

DISCLAIMER

DIMENSIONS, ILLUSTRATIONS, SPECIFICATIONS AND CERTIFICATIONS CONTAINED IN THIS DOCUMENT ARE TYPICAL OF THE ACTUAL PRODUCT AND ARE SUBJECT TO CHANGE. ECCO ENGINEERING DOES NOT MAINTAIN FORMAL DESIGN CONTROL OF THIS PRODUCT.

REVISION HISTORY		
REV.	DESCRIPTION	DATE
03	REVISED PER EL0220	2021-01-19
A	INITIAL RELEASE PER EL0220	2021-02-01
B	REVISED PER EB0002	2022-03-15


SPECIFICATIONS

- CERTIFICATIONS: ECE R10; SAE J595 CLASS 1 AMBER/WHITE; CA Title 13 CLASS B AMBER; IP67/IP69K; DOT ISTRW-1
 Note: Unique components, accessories, and hardware kits are not typically Included in the Product Certification Test Protocols. Unless otherwise Specified, the Product Certifications referred to herein are predicated upon the base product model configuration.
- FLASH MODE: Single : 75 ± 5 FLASHES PER MINUTE
 Single : 375 ± 5 FLASHES PER MINUTE
 Double : 75 ± 5 FLASHES PER MINUTE
- VOLTAGE (NOMINAL): 12-24 VDC
- VOLTAGE (EXTREME): 9-32 VDC
- CURRENT (PEAK): 1.4A (@ 12 VDC NOMINAL)
- POWER (MAXIMUM): 17.9W (@ 12 VDC NOMINAL)
- TEMPERATURE RANGE: -40°F (-40°C) TO 149°F (65°C)
- CONNECTION: 5 - 22 AWG WIRES + 3 - 22 AWG WIRES W/CONNECTOR
- MOUNTING: GROMMET
- BASE MATERIAL: POLYCARBONATE
- LENS MATERIAL: POLYCARBONATE
- PRODUCT WEIGHT: 0.5 LBS (0.23 Kg)

- NOTES:**
- ROHS COMPLIANT
 - DIMENSIONS IN INCHES[MILLIMETERS (FOR REFERENCE)]

PROPRIETARY AND CONFIDENTIAL INFORMATION

THIS DRAWING AND THE DESIGN AND OTHER INFORMATION DISCLOSED HEREIN ARE THE PROPERTY OF ELECTRONIC CONTROLS COMPANY AND/OR ITS ECCO SAFETY GROUP AFFILIATES ("ECCO") AND IS ISSUED IN CONFIDENCE TO RECIPIENT FOR ENGINEERING INFORMATION PURPOSES ONLY. THIS DRAWING AND THE DESIGN AND OTHER INFORMATION DISCLOSED HEREIN MAY NOT BE USED, COPIED, REPRODUCED OR OTHERWISE DISCLOSED IN PART OR IN WHOLE TO THIRD PARTIES OR USED FOR ANY OTHER PURPOSE WITHOUT PRIOR ECCO WRITTEN CONSENT. ECCO RESERVES ALL PATENT, COPYRIGHT, TRADEMARK AND OTHER PROPRIETARY RIGHTS TO THIS DOCUMENT, INCLUDING ALL DESIGN, MANUFACTURING, REPRODUCTION, USE AND SALES RIGHTS THERETO. THIS DRAWING IS SUBJECT TO RECALL BY ECCO AT ANY TIME, AND YOUR POSSESSION AND/OR USE CONSTITUTES ACCEPTANCE OF THESE TERMS. ©2020 ELECTRONIC CONTROLS COMPANY

SCALE 1:2.5		APPROVALS	DATE	 ECCO [®] www.eccolink.com Americas (800) 635-5900 Europe +44 (0)113 237 5340 Asia Pacific +61 (0)3 63322444
CAD GENERATED DRAWING DO NOT MANUALLY UPDATE.		DRAWN BY JW	2022-02-07	
TOLERANCES ARE IN INCHES, AND MILLIMETERS TOLERANCES UNLESS OTHERWISE STATED ARE:		CHECKED BTK	2022-02-07	DIRECTIONAL, 6" OVAL, STR-W COMBO, PL3, AW CUSTOMER PART NO. EW3060AW
MILLIMETERS DECIMALS XX. ± 1.0mm XX.X ± 0.5mm	INCHES DECIMALS X.X ± 0.1 X.XX ± 0.04 X.XXX ± 0.02	MECH. ENG.		
	ANGLES ± 0.5° FRACTIONS ± 1/64	ELEC. ENG. SPO	2022-02-07	
		TEST ENG. BAK	2022-02-09	
		SALES.		
		SIZE: A DWG. NO. ED3060AW REV. B Project: EL0220 Date Created: 2020-12-10		
THIRD ANGLE PROJECTION		Electronically Controlled Use Latest Copy		SHEET 1 OF 1

