




THE PREMIUM
FUEL ADDITIVE
COMPANY

1-800-735-3773
www.fppf.com

Includes:
Water Dispersant, Injector Cleaner, Cetane Improver

FUEL POWER PLUS LUBRICITY®

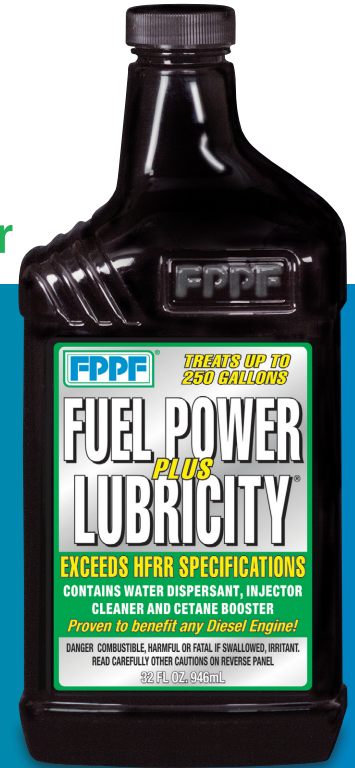


Formulated to blend our famous Fuel Power with a powerful lubricity additive to meet or exceed ASTM, Cummins and other engine manufacturers HFRR lubricity standards. Eliminate water, decarbonize the system, increase combustion and increase power all with Fuel Power plus Lubricity.



Ultra-low sulfur diesel fuels do not provide the proper lubricity recommended by engine manufacturers. This ultimate lubrication product is a superior year-round diesel fuel treatment that combines all the benefits of Fuel Power and the most effective ultra-low sulfur lubricating technology available. Plus, it can be used in both #2 and #1 diesel fuels. Additionally, **Fuel Power Plus Lubricity** contains a cetane improver for better starting and smoother engine performance. This is the perfect diesel additive for most applications, excluding severe cold weather.

- Increases Mileage, Power and Longevity of Equipment
- Disperses Water in the Fuel System
- Decarbonizes the Entire Fuel Injection System
- Contains Cetane Booster
- Helps Prevent Sludge in Diesel Fuel
- Helps Prevent Fuel Icing
- Helps Prevent Rotary and Piston Fuel Pump Wear and Reduces Pintle Scoring
- Extends Filter Life
- Suitable for use in Jet A Fuel (Ground Equipment), #1 Diesel, Kerosene, Biodiesel Blends, and all other Fuel Oil Applications

HFRR TESR (ASTM 6079) Ultra Low Sulfur Diesel Fuel Lubricity Evaluation

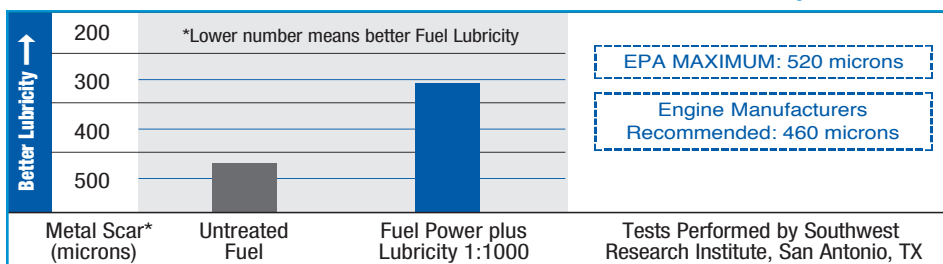

Perfect For:



FPPF Chemical Co., Inc. | 100 Dingens Street, Buffalo, NY 14206

www.fppf.com | 1-800-735-FPPF (3773) | E-Mail: sales@fppf.com | Fax: 716-856-0750



**THE PREMIUM
FUEL ADDITIVE
COMPANY**

1-800-735-3773
www.fppf.com

FUEL POWER PLUS LUBRICITY

Product Data Sheet

All the benefits of Fuel Power + contains Lubricity to exceed ASTM and engine manufacturers most recently recommended HFRR lubricity standards for ultra low sulfur diesel fuel when used as directed. Proven effective in any diesel engine.

Fuel Power + Lubricity will not harm DPF systems, helps reduce regen.



DIRECTIONS:

Add prior to filling for best mixing results.

- Quart Size: Add entire contents to any diesel fuel to treat up to 250 gallons.
- Use half of the container / 125 gallon side fuel tank.

- Bulk tank treatment ratio 1:1000.

USE EVERY FILL UP TO SAVE MONEY:

Should be used for preventative maintenance.

- Can be used with HPCR
- Alcohol Free
- Eliminates Water through Hydrogen Polar Bonding
- Increases Fuel Economy
- Helps Provide More Power
- Acts as a Combustion Catalyst
- Reduces Emissions
- Lubricates the Entire Fuel System
- Cleans the Injector System
- Removes Gum & Varnish
- Use as a Fuel Stabilizer
- Can be used for Fuel Storage
- Controls Icing
- Helps Control Waxing and Gelling
- Helps Prevent Bacteria Growth
- Increases Longevity of Equipment
- Reduces Downtime and Maintenance Costs

Item #	Unit Size	Treats up To	Case #	Qty/Cs	Case Weight	Cases/Pallet
00105	32 oz.	250	90105	12	25	48
00112P	5 gl.	5000		1	40	36
00113	55 gl.	55000		1	445	4

For more information consult the Safety Data Sheet for this product. All used and unused products should be disposed of in accordance with local, state and federal regulations.

DISTRIBUTED BY:

Fuel Power + Lubricity Fm. No. 04007 12/21

Made in the USA

