



**THE PREMIUM
FUEL ADDITIVE
COMPANY**

1-800-735-3773
www.fppf.com

The Complete Year 'Round Additive

TOTAL POWER[®]



With Anti-Gel, Pour Point Depressant, Injector Cleaner, Lubricity Additive, Cetane Improver, Water Dispersant, Fuel Stabilizer, Corrosion Inhibitor and Regen Reducer



Total Power is the most powerful combination all-in-one formula on the market today, proven to benefit any Diesel Engine! We meet or exceed all fuel standards. We turn your diesel fuel into a Premium Diesel Fuel with economic benefits of increased miles per gallon, reduced downtime and reduced maintenance costs. This can be used year 'round anywhere, in any climate. Continued use of Total Power as a preventative additive eliminates the environment that bacteria may grow in, keeps injectors operating at peak performance and so many other benefits.


Contains:

- Injector Cleaner
- Lubricity Additive
- Cetane Improver
- Water Dispersant
- Fuel Stabilizer
- Pour Point Depressant
- Wax Modifiers
- Corrosion Inhibitors

LABORATORY ANALYSIS REPORT
Base Fuel: ULSD / ATSM D6371 (CFPP)

ALL SAMPLES TREATED 1:1000	UNTREATED		TEST SAMPLES TREATED WITH:			
	TEST SAMPLES	FPPF POLAR POWER	FPPF TOTAL POWER	COMPETITOR #1	COMPETITOR #2	COMPETITOR #3
+10° F	2°	-35°	-35°	-3°	-13°	-12°
+5° F						
0° F						
-5° F						
-10° F						
-15° F						
-20° F						
-25° F						
-30° F						
-35° F						

FPPF BEATS THE COMPETITION IN THE COLDEST WEATHER

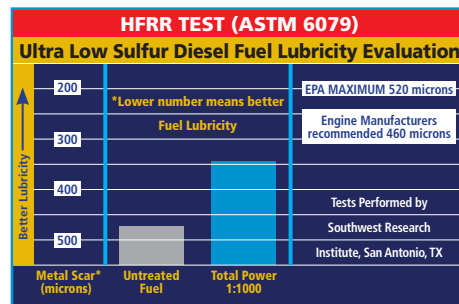

Benefits:

- Improves Fuel Economy
- Improves Power
- Effective in HPCR
- Prevents Asphaltenes
- Reduces Emissions
- Lowers Cold Filter Plug Point
- Controls IDID's
- Extends Filter Life

Perfect For: Year 'Round

Winter

Bulk Treatment

Specifically formulated for use in any internal combustion diesel engine – year 'round.



THE PREMIUM FUEL ADDITIVE COMPANY

1-800-735-3773
www.fppf.com

TOTAL POWER

Product Data Sheet

PREMIUM High Performance Year 'Round Treatment with Anti-gel formulated for today's Diesel Fuels.

Effective in:

- Heavy Duty, Medium Duty and Light Duty Trucks
- Buses
- Construction Equipment
- Agricultural Equipment
- Heating Oil
- Marine Industry
- Bulk Fuel Tanks
- Back Up Generators

Can be used in any Diesel Engine. Can be used in all Bio-Fuels, contains Bio-Stabilizers.

Total Power will not harm DPF systems, helps reduce regen.



DIRECTIONS:

Treat as follows when sub-freezing weather is predicted:

- One quart added to 250 gallons can lower the Pour Point -30°F and the Cold Filter Plug Point -15°F.
- One quart added to 125 gallons can lower the Pour Point -45°F and the Cold Filter Plug Point -25°F.

Treat as follows for injector cleaning:

- One quart to 250 gallons keeps injectors clean.
- One quart to 125 gallons removes deposits and cleans the injectors to meet ISO4406 cleanliness specifications and Peugeot DW10 keep clean and clean up performance specifications.

The above cold-weather treatment ratios are results for typical fuels. Do not exceed treatment ratio of 1:300 (one quart to 75 gallons). Do not add to gelled fuel.

Add prior to filling for best mixing results.

If fuel is already gelled, treat first with FPPF Melt Down SOS.



Item #	Unit Size	Treats up To	Case #	Qty/Cs	Case Weight	Cases/Pallet
00317	12 oz.	90	90317	12	11	100
00343	32 oz.	250	90343	12	25	48
00420*	32 oz.	250	90420*	12	25	48
00344P	5 gl.	5000		1	40	36
00344PC*	5 gl.	5000		1	40	36
00345	55 gl.	55000		1	438	4

* Packaged for distribution in Canada

For more information consult the Safety Data Sheet for this product. All used and unused products should be disposed of in accordance with local, state and federal regulations.

Total Power Fm. No. 04009 2/23

DISTRIBUTED BY:

Made in the USA

