



**THE PREMIUM  
FUEL ADDITIVE  
COMPANY**

1-800-735-3773  
www.fppf.com

## Emergency Fuel Treatment for Gelled Fuels

# MELT DOWN SOS<sup>®</sup>



Gelled fuel can cause significant, sudden downtime. FPPF Melt Down SOS is a specially formulated emergency road treatment that works quickly and powerfully.

**Melt Down SOS** dissolves gelled fuel back into solution and returns the flow in approximately 20 minutes. Melt Down SOS also de-ices frozen fuel filters. It is the most effective product of its kind on the market but should only be used in emergency situations. As strong as Melt Down SOS is, it does not harm fuel pumps, nozzles or any pre-combustion engine components.

Melt Down SOS does not contain chlorinated solvents, methanol or harmful alcohols that could harm fuel pumps, injectors or other precombustion components.

### Product Features:

- Controls Icing
- Reliquifies Gelled Fuel
- De-Ices Frozen Fuel Filters
- Works in all Fuel Systems including Common Rail



Perfect For:



Winter



Trucking

Works with all fuel systems.

**FPPF Chemical Co., Inc. | 100 Dingens Street, Buffalo, NY 14206**

**www.fppf.com | 1-800-735-FPPF (3773) | E-Mail: sales@fppf.com | Fax: 716-856-0750**



**THE PREMIUM  
FUEL ADDITIVE  
COMPANY**

1-800-735-3773  
www.fppf.com


# MELT DOWN SOS

## Product Data Sheet

Melt Down SOS is designed to dissolve ice and wax formations as an emergency treatment in gelled fuel and is completely compatible with all types of fuel.

- Reliquefies gelled diesel fuel in 20 minutes.
- De-ices frozen fuel filters.
- Use Total Power or Polar Power in diesel fuel to prevent fuel gelling & freezing.
- Use HOT ALL-in-1 in heating oil and Bio-Heat to prevent fuel gelling & freezing.

**Melt Down SOS will not harm DPF systems. Use in emergency situations only.**

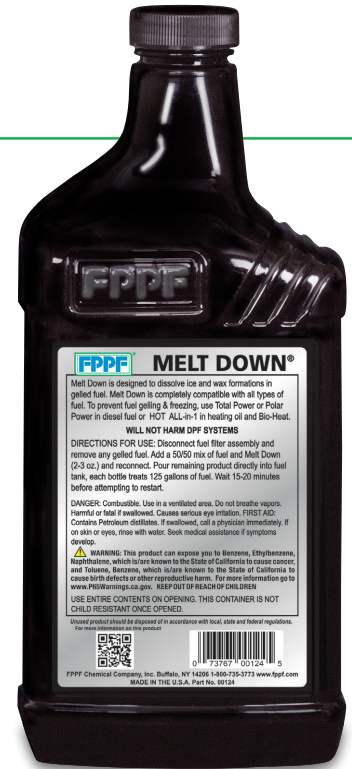

### DIRECTIONS:

- Disconnect fuel filter assembly and replace with a new filter if you have one. If not, remove as much gelled fuel as possible.
- Fill filter or filter housing with Melt Down SOS and reconnect.
- Wait 15 – 20 minutes before attempting to start.
- If engine does not start after 20 minutes, repeat the process.
- Once started, let engine idle and heat up the fuel.
- After engine is running, pour remaining product directly into fuel tank.

Item #	Unit Size	Treats up To	Case #	Qty/Cs	Case Weight	Cases/Pallet
00124	32 oz.	125	90124	12	23	48
00421*	32 oz.	125	90421*	12	23	48

\* Packaged for distribution in Canada

For more information consult the Safety Data Sheet for this product. All used and unused products should be disposed of in accordance with local, state and federal regulations.

Melt Down SOS Fm. No. 04010 12/21

**DISTRIBUTED BY:**

Made in  
the USA

