### **PRODUCT INFORMATION**

**Description** 12-24V DOT LED Heated White Reverse

Light

 Height
 57.00 mm / 2.24 in

 Width
 165.50 mm / 6.52 in

 Depth
 21.00 mm / 0.83 in

**Shape** Oval

Outer Lens Material Polycarbonate

Outer Lens Color Clear

Housing Material Polycarbonate

Housing Color Black
Bezel Color Clear

Mounting TypeGrommet/Flange BracketRetrofitsStandard 2" x 6" Signal Lights

**Minimum Operating**  $-40 \, ^{\circ}\text{C} \, / \, -40 \, ^{\circ}\text{F}$ 

Temperature

**Maximum Operating** 50 °C / 122 °F

**Temperature** 

**Mating Connector** 3-Pin AMP Connector (282087-1)


**Product Weight** 0.35 lbs / 0.16 kgs **Shipping Weight** 1.35 lbs / 0.61 kgs









### **PRODUCT DIMENSIONS**

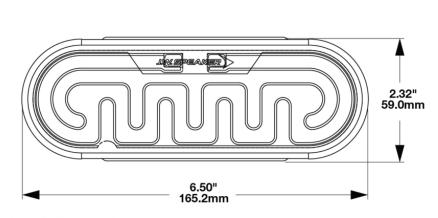




#### **Pin Out Information**

LIGHT (Socket shown ↑ top)



#### **WIRE HARNESS\***



\*Wire harness sold separately on Part # 0346721. Wire harness included on Part # 0346724. Also available as a single accessory (Part # 3270501)

\*\*To operate heating circuit on the Reverse Lamp, a separate constant 12V DC power line must be wired.

#### **ELECTRICAL SPECIFICATIONS**

Input Voltage 10-30V DC
Operating Voltage 12-24V DC

Transient Spike Protection 150V Peak @ 1 HZ-100 Pul

Current Draw 0.85A @ 12V DC (Reverse)
0.85A @ 24V DC (Reverse)

1.9A @ 12V DC (Reverse Heated) 1.9A @ 24V DC (Reverse Heated)

Print date: 2024-08-11

### REGULATORY STANDARDS COMPLIANCE











Buy America Standards FMVSS 108 s7.6 (Table XII) Tested to ECE Reg. 10 (Radiated Emissions only) Eco Friendly SAE J593

#### **APPLICATIONS**











### **INSTALLATION & APPLICATION INFORMATION**

Installation requires the white wire (Heater) to be powered in order for the heater to work. If power is not supplied to the heater, the light will not be heated. Current Draws will differ based upon whether or not the heater is active. Turn off power before installing.

### **PRODUCT WARNINGS**

For California residents:

▲ WARNING: Cancer and reproductive harm - www.P65Warnings.ca.gov.

AVERTISSEMENT: Cancer et effet nocif sur la reproduction - <a href="www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>.



### **ACCESSORIES**



# Part Number 4242891

Rubber Mounting Grommet for Model



### <u>Part Number</u> <u>5870261</u>

Plastic Mounting Flange for Model 274



### Part Number 8200581

Steel L-Shaped Mounting Bracket for Model 274



#### Part Number 8200591

Chrome Plastic Trim Ring for Model 274



## Part Number 3270501

3-Pin AMP Connector Wire Harness Assembly

### **RELATED PRODUCTS**



### Part Number 0346701

12-24V DOT LED Heated Red Stop, Tail, & Turn Light



## **Part Number 0346704**

12-24V DOT LED Heated Red Stop, Tail, & Turn Light with Harness



### Part Number 0346711

12-24V DOT LED Heated Amber Rear Turn Light



### Part Number 0346714

12-24V DOT LED Heated Amber Rear Turn Light with Harness



### Part Number 0346724

12-24V DOT LED Heated White Reverse Light with Harness



## Part Number 0346781

12-24V DOT LED Heated Amber Front Position & Front Turn Signal Light



## Part Number 0346784

12-24V DOT LED Heated Amber Front Position & Front Turn Signal Light with Harness



## **Part Number** 0346791

12-24V DOT LED Heated Amber Side Marker Light

