

LED Headlights - Model 515

PRODUCT INFORMATION

Description	12-48V ECE LED Material Handling Headlight with Chrome Inner Bezel
Height	194.06 mm / 7.64 in
Width	107.95 mm / 4.25 in
Depth	131.57 mm / 5.18 in
Shape	Stylized
Outer Lens Material	Hardcoated Polycarbonate
Outer Lens Color	Clear
Housing Material	Die-Cast Aluminum
Housing Color	Black
Bezel Color	Chrome
Mounting Hardware Description	(x2) M6-1 x 25 Mounting Bolts
Mounting Type	Mounts to front of lift truck
Minimum Operating Temperature	-40 °C / -40 °F
Maximum Operating Temperature	65 °C / 149 °F
Connector or Wiring	Integrated 4-Pin Deutsch Weather-Proof Socket (DT04-4P)
Mating Connector	4-Pin Deutsch Weather-Proof Plug (DT06-4S)
Product Weight	2.14 lbs / 0.97 kgs
Shipping Weight	2.45 lbs / 1.11 kgs




Print date: 2024-08-11

© 2024 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

J.W. SPEAKER 
Engineered. Lighting. Solutions.

LED Headlights - Model 515

PRODUCT DIMENSIONS

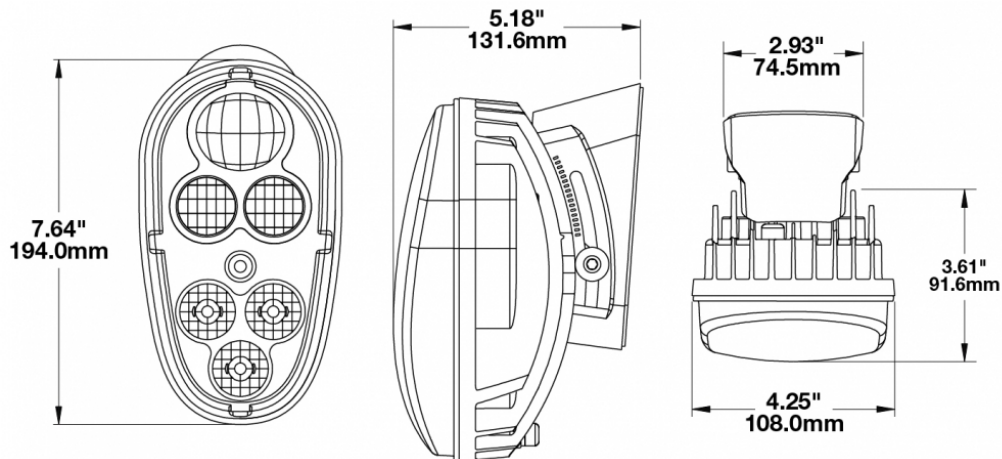

ELECTRICAL SPECIFICATIONS

Input Voltage	12-48V DC
Operating Voltage	9-60V DC
Transient Spike Protection	330V Peak @ 1 HZ-100 Pulses
White Wire	Front Position
Red Wire	Low Beam
Yellow Wire	Turn
Black Wire	Ground
Current Draw	0.60A @ 12V DC (Low Beam)
	0.30A @ 24V DC (Low Beam)
	0.20A @ 36V DC (Low Beam)
	0.15A @ 48V DC (Low Beam)
	0.05A @ 12V DC (Front Position)
	0.05A @ 24V DC (Front Position)
	0.05A @ 36V DC (Front Position)
	0.05A @ 48V DC (Front Position)
	1.45A @ 12V DC (Turn Signal)
	0.70A @ 24V DC (Turn Signal)
	0.45A @ 36V DC (Turn Signal)
	0.40A @ 48V DC (Turn Signal)

Print date: 2024-08-11

© 2024 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

LED Headlights - Model 515


REGULATORY STANDARDS COMPLIANCE



Buy America Standards	ECE Reg 113
ECE Reg 6	ECE Reg 7
Eco Friendly	IEC IP67

PHOTOMETRIC SPECIFICATIONS

Raw Lumen Output	540 Lumens (Low Beam)
Effective Lumen Output	420 Lumens (Low Beam)
Nominal LED Color Temperature	5000 K
Beam Pattern(s)	Forward Lighting - Low Beam (ECE Left Hand) Forward Lighting - Low Beam (ECE Right Hand) Signalization - Front Position Signalization - Turn (Front) Signalization - Turn (Rear)

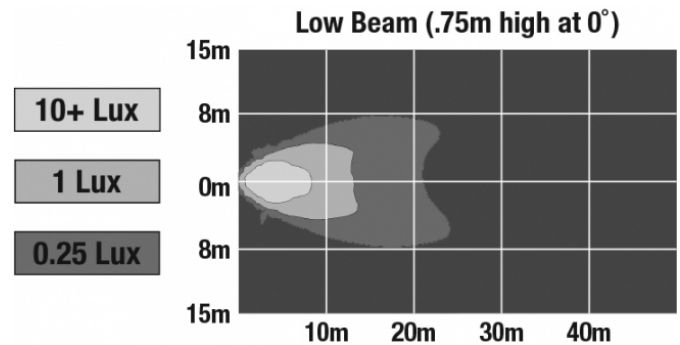

APPLICATIONS



PRODUCT WARNINGS

For California residents:

⚠ **WARNING:** Cancer and reproductive harm - www.P65Warnings.ca.gov.

⚠ **AVERTISSEMENT:** Cancer et effet nocif sur la reproduction - www.P65Warnings.ca.gov.

Print date: 2024-08-11

© 2024 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

LED Headlights - Model 515

RELATED PRODUCTS



Part Number
0548901

12-48V ECE LED
Material Handling
Headlight with Black
Inner Bezel

Print date: 2024-08-11

© 2024 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660