PRODUCT INFORMATION

Description 12-24V DOT LED High & Low Beam

Headlight with Chrome Inner Bezel -

Single Light

 Height
 176.53 mm / 6.95 in

 Width
 176.53 mm / 6.95 in

 Depth
 99.82 mm / 3.93 in

Shape Round

Outer Lens Material Polycarbonate

Outer Lens Color Clear

Housing Material Die-Cast Aluminum

Housing Color Black

Bezel Color Chrome

Retrofits 2D1 "PAR56" or 7" round headlights

Minimum Operating $-40 \, ^{\circ}\text{C} \, / \, -40 \, ^{\circ}\text{F}$

Temperature

Maximum Operating $65 \, ^{\circ}\text{C} \, / \, 149 \, ^{\circ}\text{F}$

Temperature

Connector or Wiring H4


Mating ConnectorH4 AMP#172615-2Product Weight2.31 lbs / 1.05 kgsShipping Weight3.50 lbs / 1.59 kgs







PRODUCT DIMENSIONS

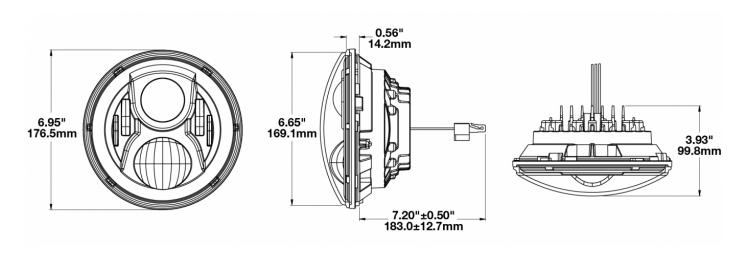

ELECTRICAL SPECIFICATIONS

Input Voltage12-24V DCOperating Voltage9-32V DC

Transient Spike Protection 150V Peak @ 1 HZ-100 Pulses

Black Wire Ground
White Wire High Beam
Yellow Wire Low Beam

Current Draw 3.50A @ 12V DC (High Beam)

2.00A @ 12V DC (Low Beam) 1.80A @ 24V DC (High Beam) 1.10A @ 24V DC (Low Beam)



REGULATORY STANDARDS COMPLIANCE











Buy America Standards FMVSS 108 s10.1 (Table XIX) IEC IP67

Eco Friendly FMVSS 108 s10.1 (Table XVIII)

PHOTOMETRIC SPECIFICATIONS

Raw Lumen Output 3,200 (High Beam); 1,770(Low

Beam)

Effective Lumen 1,260 (High Beam); 750 (Low

Output Beam)

Candela Output 71,500 (High Beam) 35,003 (Low

Beam)

Nominal LED Color

Temperature

Beam Pattern(s)


5000 K


Forward Lighting - High Beam

(DOT)

Forward Lighting - Low Beam

(DOT)

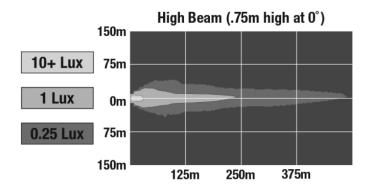





APPLICATIONS





















ADDITIONAL INFORMATION

Headlight must be securely mounted and properly aimed such that the beam pattern cut off line complies with all applicable regulations. If you are not familiar with the legal requirements for aiming your headlights, please see a professional service provider. We recommend that headlights are aimed with a headlight aiming system for proper alignment.

PRODUCT WARNINGS

For California residents:

▲ WARNING: Cancer and reproductive harm - www.P65Warnings.ca.gov.

AVERTISSEMENT: Cancer et effet nocif sur la reproduction - www.P65Warnings.ca.gov.

ACCESSORIES



Part Number 8000381 H4/H4 Anti-Flicker Harness for J.W. Speaker LED headlights



Part Number 3156351 Mounting Ring Kit for 7" Round (PAR56) Headlights



Part Number 3266081 Jumper Harness H4/H13 for 8700 Evolution & 8710 Series



Part Number 8000311 Anti-Flicker Harness H4/H13 for 8700 Evolution Series Headlights



Part Number 8200411 Wire Harness for 7" Motorcycle Headlights



RELATED PRODUCTS



Part Number 0554941

12-24V DOT LED High & Low Beam Headlight with Black Inner Bezel - Single Light



Part Number 0554981

12-24V DOT LED High & Low Beam Headlight with Black Inner Bezel & Mounting Ring -Single Light



Part Number 0554991

12-24V DOT LED High & Low Beam Headlight with Chrome Inner Bezel & Mounting Ring - Single Light



Part Number 0556281

12-24V DOT LED High & Low Beam Heated Headlight with Black Inner Bezel - Single Light



Part Number 0556291

12-24V DOT LED High & Low Beam Heated Headlight with Chrome Inner Bezel - Single Light



Part Number 0556301

12-24V ECE LED RHT High & Low Beam Heated Headlight with Black Inner Bezel -Single Light - FP & DRL



Part Number 0556311

12-24V ECE LED RHT High & Low Beam Heated Headlight with Chrome Inner Bezel -Single Light - FP&DRL



Part Number 0556321

12-24V ECE LED LHT High & Low Beam Heated Headlight with Black Inner Bezel -Single Light - FP & DRL

