### PRODUCT INFORMATION

**Description** 12-24V LED Work Light with Spot Beam

Pattern

 Height
 150.37 mm / 5.92 in

 Width
 150.37 mm / 5.92 in

 Depth
 45.97 mm / 1.81 in

Shape Round

Outer Lens Material Polycarbonate

Outer Lens Color Clear

Housing Material Polycarbonate

Housing Color Black

Mounting Hardware Panel Mount

Description

**Minimum Operating**  $-40 \, ^{\circ}\text{C} \, / \, -40 \, ^{\circ}\text{F}$ 

**Temperature** 

**Maximum Operating**  $65 \, ^{\circ}\text{C} \, / \, 149 \, ^{\circ}\text{F}$ 

**Temperature** 

**Connector or Wiring** Integrated 2-Pin Deutsch Weather-Proof

Socket (DT04-2P)

Mating Connector Connector Metri PE12059450-B BLACK


2-pin

**Product Weight** 0.98 lbs / 0.44 kgs **Shipping Weight** 1.40 lbs / 0.64 kgs





### **PRODUCT DIMENSIONS**

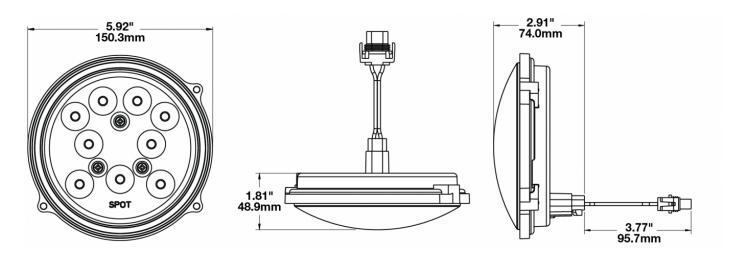

### **ELECTRICAL SPECIFICATIONS**

Input Voltage12-24V DCOperating Voltage10-33V DC

**Transient Spike Protection** 330V Peak @ 1 HZ-100 Pulses

 Red Wire
 Positive

 Black Wire
 Negative

 Current Draw
 2A @ 12V DC

 1A @ 24V DC

### **REGULATORY STANDARDS COMPLIANCE**








Buy America Standards IEC IP69K

Eco Friendly



### PHOTOMETRIC SPECIFICATIONS

Raw Lumen Output 2385 **Effective Lumen** 1340


**Output** 

**Nominal LED Color** 

**Temperature** 

Beam Pattern(s) Forward Lighting - Spot

5000 K

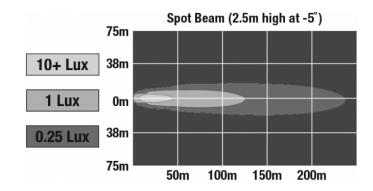

### **APPLICATIONS**





















#### **PRODUCT WARNINGS**

For California residents:

▲ WARNING: Cancer and reproductive harm - www.P65Warnings.ca.gov.

▲ AVERTISSEMENT: Cancer et effet nocif sur la reproduction - www.P65Warnings.ca.gov.



### **RELATED PRODUCTS**



**Part Number** 1501691 12-24V LED Work Light 12-24V LED Work Light with Flood Beam Pattern



**Part Number** 1501701 with Trapezoid Beam Pattern