PRODUCT INFORMATION

Description 12V DOT/ECE LED Fog Light - 2 Light Kit

 Height
 49.40 mm / 1.94 in

 Width
 150.40 mm / 5.92 in

 Depth
 63.00 mm / 2.48 in

Shape Rectangular
Outer Lens Material Polycarbonate

Outer Lens Color Clear

Housing Material Die-Cast Aluminum

Housing Color Black
Bezel Color Black

Mounting Hardware (x2) 1/4-20 x 1.50" Mounting Bolt

Description

Mounting Type Pedestal/Pendant **Minimum Operating** -45 °C / -49 °F

Temperature

Maximum Operating $65 \, ^{\circ}\text{C} \, / \, 149 \, ^{\circ}\text{F}$

Temperature

Connector or WiringIntegrated 2-Pin Deutsch ConnectorMating Connector2-Pin Deutsch Weather-Proof Plug

(DT06-2S)

Product Weight 0.80 lbs / 0.36 kgs **Shipping Weight** 2.30 lbs / 1.04 kgs

Additional Information Includes Universal Bracket Mounts for


both lamps.







PRODUCT DIMENSIONS

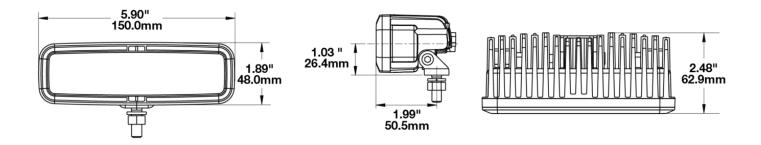

ELECTRICAL SPECIFICATIONS

Input Voltage 12V DC
Operating Voltage 10-18V DC

Transient Spike Protection 150V Peak @ 1 HZ-100 Pulses

Red Wire Power
Black Wire Ground

Current Draw 0.55A @ 10V DC (Fog)

0.88A @ 12V DC (Fog) 1.10A @ 18V DC (Fog)



REGULATORY STANDARDS COMPLIANCE







ECE Reg 19







Buy America Standards Eco Friendly

(Radiated Emissions only)

IEC IP69K **SAE J578 SAE J583** Tested to ECE Reg. 10

PHOTOMETRIC SPECIFICATIONS


Raw Lumen Output 800 **Effective Lumen** 250

Output

Candela Output 6,700 **Nominal LED Color** 4750 K

Temperature

Forward Lighting - Fog Beam Pattern(s)

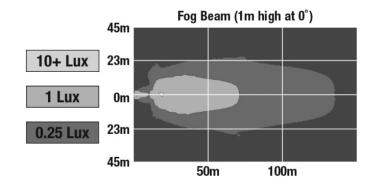

APPLICATIONS

















PRODUCT WARNINGS

For California residents:

▲ WARNING: Cancer and reproductive harm - www.P65Warnings.ca.gov.

▲ AVERTISSEMENT: Cancer et effet nocif sur la reproduction - www.P65Warnings.ca.gov.

Print date: 2024-08-11



RELATED PRODUCTS







Part Number 1603521 12-24V LED Driving Light with Flood Beam Pattern



Part Number 1603601 12V DOT/ECE LED Fog Light