



THE DRIVELINE EXPERTS

Small Parts

SUB SECTION

Driveline Weight
PTO Friction Disc
Adaptor Hardware
PTO/AUX Shaft-Shielding System
PTO Safety Shield Kit
Drive Shaft Sleeve
Increasing Bushing
Pilot Reducer
Dust Seal
Welch Plug
U-Bolt Kit

AND MUCH MORE!

**Manufacturing Driveline Solutions®
in the USA Since 1921.**


NeapcoAftermarket.com

SECTION 10



SMALL PARTS

DRIVELINE WEIGHT

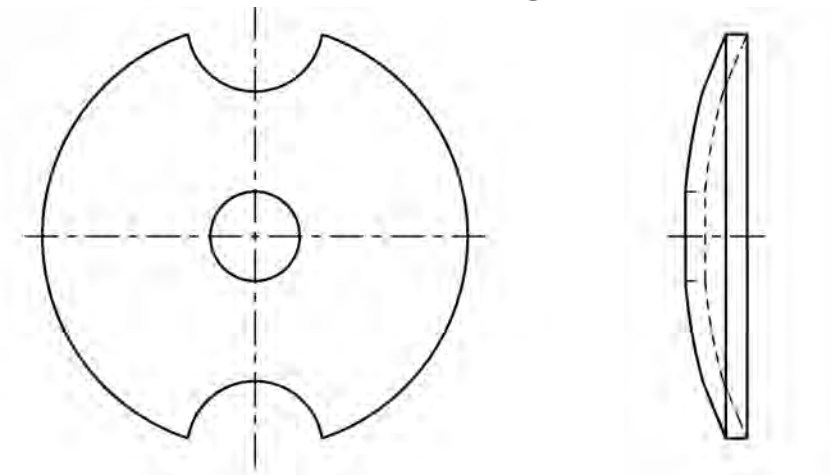


Material	Unit Weight Grams	Unit Weight Ounces	Quantity Per Box	Thickness	Width	Tube Dia.	Part Number
Steel	4.000	0.140	300	0.062	0.875	1.250 AND UP	DLW-1
Steel	5.000	0.170	250	0.062	0.969	1.250 AND UP	DLW-2
Steel	8.000	0.280	200	0.062	1.188	1.250 AND UP	DLW-3
Steel	10.000	0.350	150	0.062	1.312	1.250 AND UP	DLW-4
Steel	20.000	0.700	250	0.125	1.312	1.250 AND UP	DLW-5
Steel	30.000	1.050	150	0.188	1.312	1.250 AND UP	DLW-6
Steel	42.000	1.480	50	0.125	1.625	1.250 AND UP	DLW-30
Steel	50.000	1.760	50	0.125	1.625	2.000 AND UP	DLW-17

PTO FRICTION DISC

DL Series	Thickness	Inside Dia.	Outside Dia.	Quantity	Part Number
2200 Series		A-3.329		B-1.250	
2200	0.125	3.340	6.875	2	61-2200

ADAPTER HARDWARE

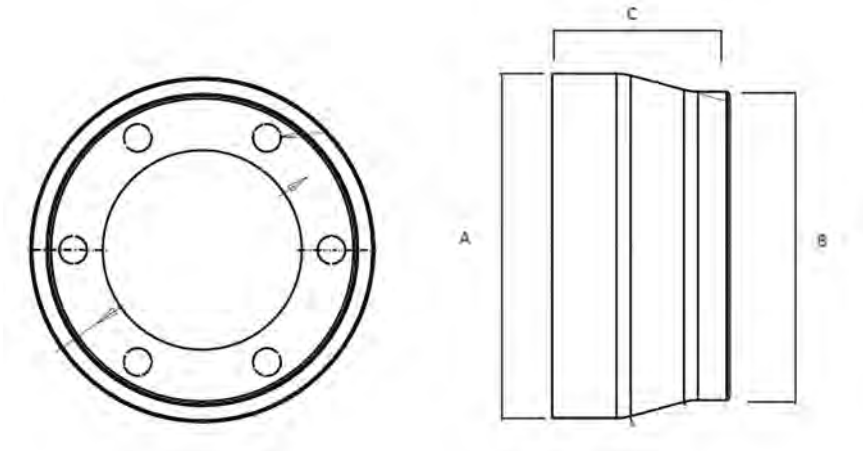


C Length	A Outside Diameter 1	B Outside Diameter 2	Part Number
2.568	4.980	4.457	NPS-06-2310-1X

SMALL PARTS

PTO / AUX SHAFT - SHIELDING SYSTEM

68-1000

FB-N1000 Shield Kit

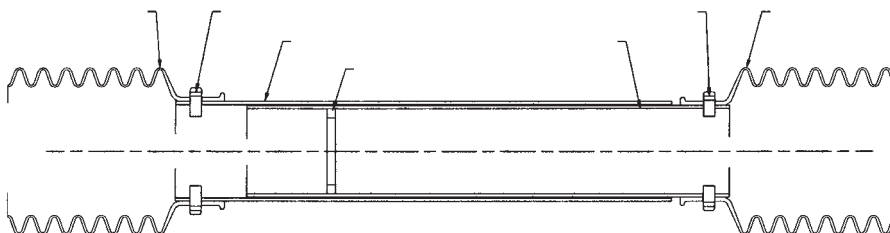


Consists of:

- 1) FB-275-SP Bell
- 1) FB-300-SP Bell
- 1) PT-2.75-60.00" Inner Shield Tube
- 1) PT-3.00-60.00" Outer Shield Tube
- 4) FN-275 Shield Bearing
- 4) FN-300 shield Bearing
- 1) 2294-4 Shield Support Bearing
- 1) FBIS-99.6 Instruction Sheet

68-0275

FB-275-SP Replacement Bell Kit

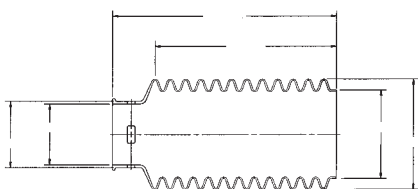


Consists of:

- 1) FB-275-SP Bell
- 4) FN-275 Shield Bearing

68-0300


FB-300-SP Replacement Bell Kit

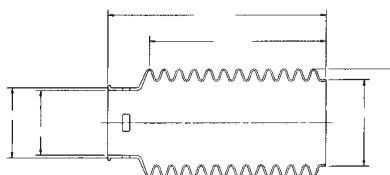

Consists of:

- 1) FB-300-SP Bell
- 4) FN-300 Shield Bearing

PTO / AUX SHAFT - SHIELDING SYSTEM

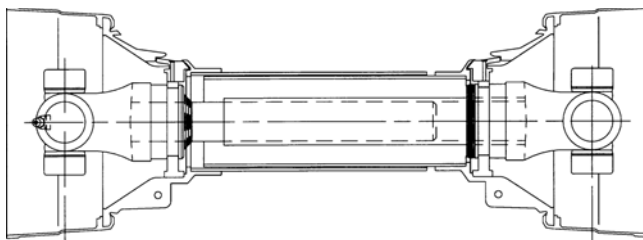


DL Series	Driveshaft Style	CL To CL Max. Extended Length	CL To CL Collapsed Length	Material	Part Number
1000 Series A-2.312 B-0.938 C-1.500					
1000	Welded-Type 1	38.000	26.750	Steel	58-0627
1000	Welded-Type 1	62.000	38.750	Steel	58-0639
1000	Welded-Type 1	86.000	50.750	Steel	58-0651
1200 Series A-2.562 B-1.063 C-1.812					
1200	Welded-Type 1	38.000	27.250	Steel	58-1227
1200	Welded-Type 1	62.000	39.250	Steel	58-1239
1200	Welded-Type 1	86.000	51.250	Steel	58-1251
1800 Series B-1.00 C-2.34					
1800	Welded-Type 1	62.000	40.000	Steel	58-1840
1800	Welded-Type 1	86.000	52.000	Steel	58-1852
2000 Series A-2.625 B-1.125 C-1.85					
2000	Welded-Type 1	44.187	28.187	Steel	58-2028
2000	Welded-Type 1	68.312	40.000	Steel	58-2040
2000	Welded-Type 1	80.25	52.000	Steel	58-2052
2200 Series A-3.218 B-1.250 C-2.06					
2200	Welded-Type 1	44.500	28.500	Steel	58-2229
2200	Welded-Type 1	65.000	39.000	Steel	58-2239
2200	Welded-Type 1	77.000	51.000	Steel	58-2251
2600 Series B-1.37 C-2.81					
2600	Welded-Type 1	42.625	28.875	Steel	58-2629
2600	Welded-Type 1	62.625	38.250	Steel	58-2639
2600	Welded-Type 1	75.375	51.000	Steel	58-2651
N44 Series B-1.31 C-2.79					
N44	Welded-Type 1	41.937	25.500	Steel	58-4429
N44	Welded-Type 1	65.000	39.000	Steel	58-4439
N44	Welded-Type 1	76.437	50.437	Steel	58-4451

SMALL PARTS

PTO SAFETY SHIELD KIT

DL Series	Bell OD	Compressed Length	Length	Maximum Extended Length	Thickness	Used On	Part Number
B&P8							
B&P8	8.000	***	60.000	***	***	***	69-2648
W2100							
W2100	5.250	***	60.000	***	***	***	69-0648
W2500							
W2500	7.062	***	60.000	***	***	***	69-2248
WI							
WI	6.125	***	60.000	***	***	***	69-1248
***	5.000	***	10.176	8.237	***	***	68-0275
***	5.000	***	10.176	8.237	***	***	68-0300
***	***	50.352	***	140.352	***	***	68-1000
***	***	48.227	***	76.102	***	***	68-1001
***	***	63.102	***	88.602	***	***	68-1072
***	***	***	***	***	0.335	68-0275	FN-275-4
***	***	***	***	***	0.335	68-0300	FN-300-4


DRIVESHAFT SLEEVE

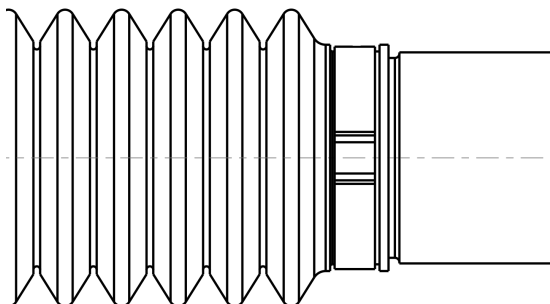

DL Series	Spline/Number Teeth	Fits Tube Dia. & Wall Thickness	Boot Apexes	Bore Type	Butt Dia.	CL To End Of Spline	End Of Spline To Radius	End Of Spline To Weld	Inside Dia.	Length Of Spline	Outside Dia.	Description	U-joint	Part Number
1410 Series						A-4.438			B-1.188					
1410	1.43-20 based on 22	2.500 x 0.120	6	Round	2.260	8.600	5.910	4.980	1.810	4.110	2.600	Includes (1) yoke shaft, (1) boot, (1) sleeve, (1) u-joint, (2) clamps, (1) strap	2-0054G	N3-1411- 1411X


SMALL PARTS

INCREASING BUSHING

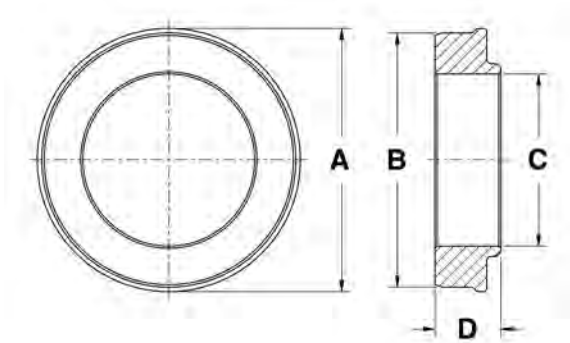


Butt Dia.	Tube Size Max	A Outside Dia.	B Tube Pilot	C Inside Dia.	D Length	Quantity	Part Number
2.500 X 0.100	3.500 X 0.065	3.000	2.875	2.281	0.875	1	5361
3.000 X 0.080	3.500 X 0.083	3.500	3.344	2.838	0.875	1	5368
2.500 X 0.080	3.500 X 0.083	3.500	3.344	2.328	0.875	1	5369
2.500 X 0.100	3.500 X 0.065	3.500	3.375	2.281	0.875	1	5362
3.000 X 0.130	3.500 X 0.065	3.500	3.375	2.719	0.875	1	5363
3.500 X 0.080	4.000 X 0.083	4.000	3.844	3.338	0.875	1	5373
3.000 X 0.130	4.000 X 0.083	4.000	3.875	2.719	0.875	1	5364
3.500 X 0.160	4.000 X 0.083	4.000	3.875	3.188	0.875	1	5365
3.500 X 0.160	4.500 X 0.083	4.500	4.375	3.188	1.000	1	5366

PILOT REDUCER

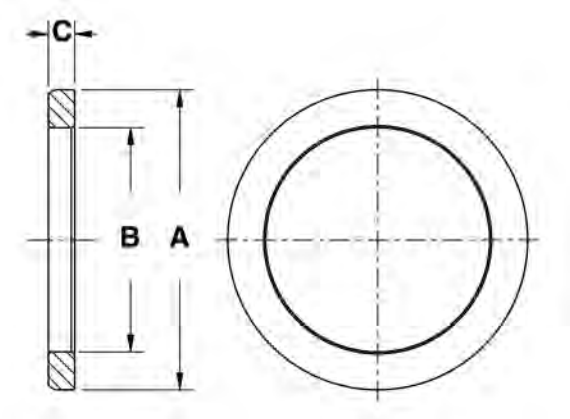

A Outside Dia.	B Inside Dia.	Quantity	Part Number
2.688	2.000	1	5324


DUST SEAL

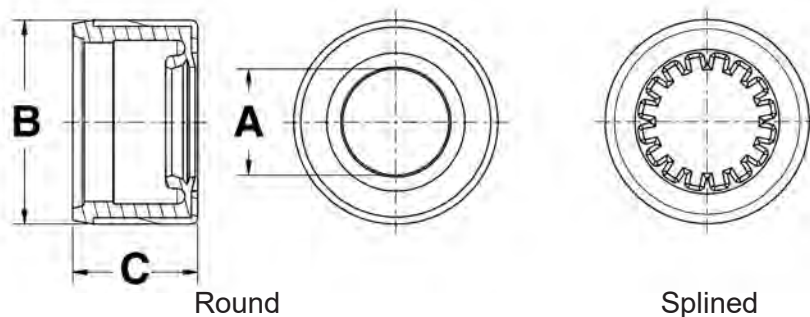

DL Series	Type	A Inside Dia.	B Outside Dia.	C Height	Lubrication Type	Quantity	Part Number
1000/1210							
1000/1210	Round	1.000	2.000	1.312	***	1	280196
1280/1310							
1280/1310	Splined	1.250-16	1.688	0.656	***	1	ND2K
1310 THRU 1410							
1310 THRU 1410	Round	1.156	2.125	1.312	NON-GREASABLE	1	280194
1310 THRU 1410	Round	1.156	2.125	1.312	GREASABLE	1	280194-1
1310 THRU 1410	Splined	1.375-16	2.125	1.000	***	1	280195
1350/1410							
1350/1410	Round	1.188	2.125	0.750	***	1	ND3A
1350/1410	Splined	1.375-16	1.906	0.750	***	1	ND3G
1350/1410	Splined	1.500-16	1.906	0.750	***	1	ND3K
1410/1480							
1410/1480	Round	2.250	2.312	0.750	***	1	ND3H
1550 Series A-5.250 B-1.375							
1550	Round	1.406	2.578	0.906	***	1	ND4J
1550	Splined	1.750-16	2.344	0.750	***	1	ND4K
1610 Series A-5.321 B-1.875							
1610	Round	1.625	2.641	0.938	***	1	N5-86-68
1710/1760 Series							
1710/1760	Round	2.062	3.344	0.938	***	1	N6.3-86-18
1810 Series A-7.547 B-1.938							
1810	Round	2.516	3.969	0.953	***	1	N6.5-86-38


SMALL PARTS

WELCH PLUG

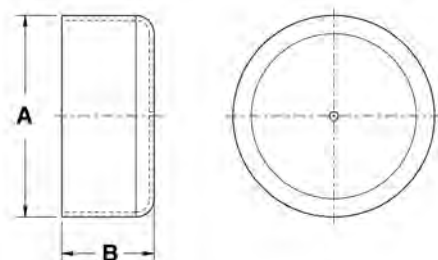


DL Series	A Height	B Outside Dia.	Quantity	Part Number
1610 Series A-5.321 B-1.875				
1610	0.438	2.203	1	N5-68-54
1610	0.715	2.375	***	N5-68-164
1710/1760				
1710/1760	0.531	2.750	1	N6-68-51
1710 Series A-6.094 B-1.938				
1710	1.250	2.750	1	N6-68-71
1710	0.781	2.880	***	N6-68-64
1710	1.500	2.880	***	N6-68-74
1760 Series A-7.000 B-1.938				
1760	1.094	2.750	1	N6.3-68-14
1810 Series A-7.547 B-1.938				
1810	0.625	3.250	1	N8-68-13
1810	0.725	3.365	***	N6.5-68-64

U-BOLT KIT




DL Series	Bearing Dia.	A Stud Length	B CL To CL Of Studs	C Thread Size	Thread Length	Torque (ft.-lbs.)	Used With U-joint	Quantity	Part Number
1310/1330									
1310/1330	1.062	1.726	1.406	5/16-24	0.55	14-17	1-0153 / 1-0154 / 1-0200 / 2-4800	1	1-0089

U-BOLT KIT (Cont'd)



DL Series	Bearing Dia.	A Stud Length	B CL To CL Of Studs	C Thread Size	Thread Length	Torque (ft.-lbs.)	Used With U-joint	Quantity	Part Number
1350/1410									
1350/1410	1.188	2.000	1.656	3/8-24	0.62	20-24	2-0053 / 2-0054	1	1-0099
1480/1550									
1480/1550	1.375	2.281	1.906	7/16-20	0.72	32-37	3-0188 / 3-0155	1	1-0109
1310/1330									
1310/1330	1.125	1.828	1.578	5/16-24	0.72	14-17	2-4900	1	1-0189

U- JOINT BEARING CAP RETAINER

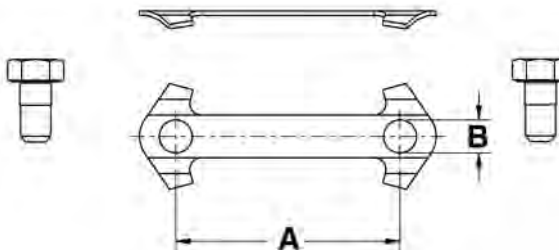


DL Series	A CL To CL	Thread Size	Length Under Head	B Hole Dia.	Used With U-joint	Quantity	Part Number
1610 Series A-5.321 B-1.875							
1610*	2.313	***	***	0.344	4-0279 / 4-0674	1	1-2858
1710 / 1760 / 1810							
1710 / 1760 / 1810*	2.437	***	***	0.406	5-0280 / 6-0675 / 6-0677 / 6-0407 / 6-0676 / 6-0281	1	1-2859
20R / 25R							
20R / 25R*	***	***	***	***	6-0020 / 6-0025	1	NKIT-RPL25-20
SPL170/SPL250							
SPL170/SPL250*	***	***	***	***	6-1170 / 6-1250	1	1-0070
NPL170/250							
NPL170/250	***	M8 X 1.000	0.551	***	6-0170 and 6-0250	***	N211941X

* SPL - Spicer® Life Series driveshafts is a registered trademark of Dana Limited

SMALL PARTS


BEARING STRAP KIT

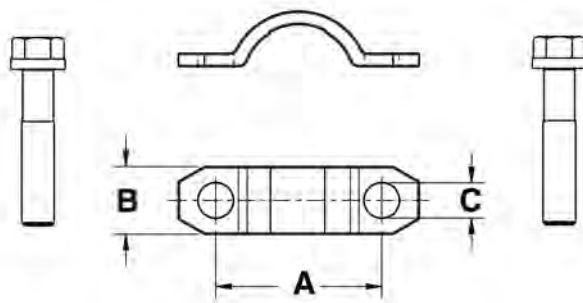

DL Series	Bearing Dia.	A CL To CL	B Strap Width	C Bolt Hole Dia.	Bolt Length	Thread Size	Torque (ft.-lbs.)	Used With U-joint	Quantity	Part Number
1310 Series A-3.469 B-1.063										
1310*	1.063	***	0.630	***	***	***	***	***	50	N2-95-29
1310 / 1330										
1310 / 1330*	1.062	1.594	0.625	0.312	1.500	5/16-24	30-35	1-0153 / 1-0154 / 1-0200 / 2-4800	1	1-0024
1310 / 1330*	1.062	1.594	0.688	0.281	0.594	1/4-28	13-18	1-0153 / 1-0154 / 1-0200 / 2-4800	1	1-0022
1330/1330XC/1350/1355/7290/S44/P55-55-2/P55-55-675										
1330/1330XC/1350/1355/7290/S44/P55-55-2/P55-55-675*	***	***	***	***	***	***	***	***	50	N3-95-19
1350 / 1410										
1350 / 1410*	1.188	1.656	0.750	0.344	1.500	5/16-24	30-35	2-0053 / 2-0054	1	1-0020
1350 / 1410*	1.188	1.806	0.750	0.344	0.750	5/16-24	30-35	2-0053 / 2-0054	1	1-0019
1410/1415										
1410/1415*	***	***	***	***	***	***	***	***	50	N3-95-29
1480 / 1550										
1480 / 1550*	1.375	2.125	0.844	0.406	0.750	3/8-24	55-60	3-0188 / 3-0155	1	1-0021
1485 / 1555										
1485 / 1555*	1.375	1.938	0.750	0.344	1.281	5/16-24	14-17	3-0486 / 3-1555	1	1-0030
1610 Series A-5.321 B-1.875										
1610*	1.875	2.500	1.000	0.406	0.750	3/8-24	45-60	4-0674	1	1-0045
1710 / 1760 / 1810										
1710 / 1760 / 1810*	1.938	2.812	1.062	0.531	1.000	1/2-20	115-135	6-0675 / 6-0676 / 6-0677	1	1-0046
3R Series A-3.563 B-1.125 C-2.563										
3R*	1.125	1.812	0.625	0.328	1.500	5/16-24	30-35	2-3010 / 2-3011 / 2-3111	1	1-0025
7260 Series A-3.000 B-1.078 C-2.125										
7260*	1.078	1.500	0.562	0.266	0.625	1/4-28	13-18	1-6300 / 1-6301	1	1-0023

* SPL - Spicer ® Life Series driveshafts is a registered trademark of Dana Limited

BEARING STRAP KIT (Cont'd)

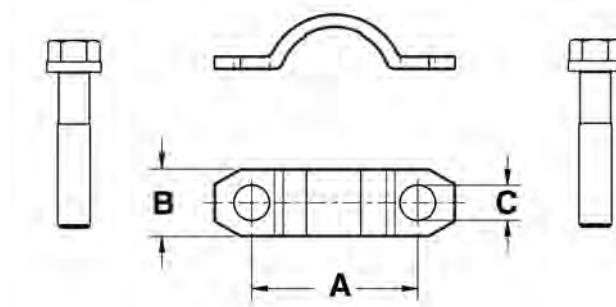

DL Series	Bearing Dia.	A CL To CL	B Strap Width	C Bolt Hole Dia.	Bolt Length	Thread Size	Torque (ft-lbs.)	Used With U-joint	Quantity	Part Number
7290 Series A-3.563 B-1.126 C-2.625										
7290*	1.125	1.531	0.625	0.281	0.594	1/4-28	13-18	2-1175	1	1-0018
NPL170/SPL170										
NPL170/SPL170 *	2.166	3.234	1.094	0.500	0.984	M12x1.25	115-135	6-1170	1	N170-70-18X
NPL170/SPL170*	2.166	3.234	1.094	0.500	0.984	M12x1.25	115-135	6-1170	1	N170-70-08X
NPL250/SPL250										
NPL250/SPL250*	2.359	3.438	1.125	0.500	0.984	M12x1.25	115-135	6-1250	1	N250-70-08X
NPL250/SPL250*	2.359	3.438	1.125	0.500	0.984	M12x1.25	115-135	6-1250	1	N250-70-18X
SPL90 / SPL100										
SPL90 / SPL100*	1.625	2.312	***	0.391	0.750	3/8-24	45-60	4-1090 / 4-1091	1	N90-70-28X

BOLT



Thread Dia.	Grade	Length	Number Of Bolts	Length Under Head	Quantity	Part Number
1/4-28	8	0.562	***	***	100	6029562
5/16-24 UNF	8	1.250	***	***	4	37050X
5/16-24 UNF	8	1.500	100	***	100	1-0790
3/8-16	***	0.750	***	***	25	50-0449
3/8-24	***	1.250	4	***	1	N131F

* SPL - Spicer ® Life Series driveshafts is a registered trademark of Dana Limited


SMALL PARTS

BOLT (Cont'd)




Thread Dia.	Grade	Length	Number Of Bolts	Length Under Head	Quantity	Part Number
3/8-24	***	1.250	8	***	1	N161F
7/16-20	***	1.250	***	***	1	N135F
1/2-20	***	1.500	***	***	1	N148F
M12 X 1.25	***	1.480	***	1.000	20	N5007417

SNAP RING

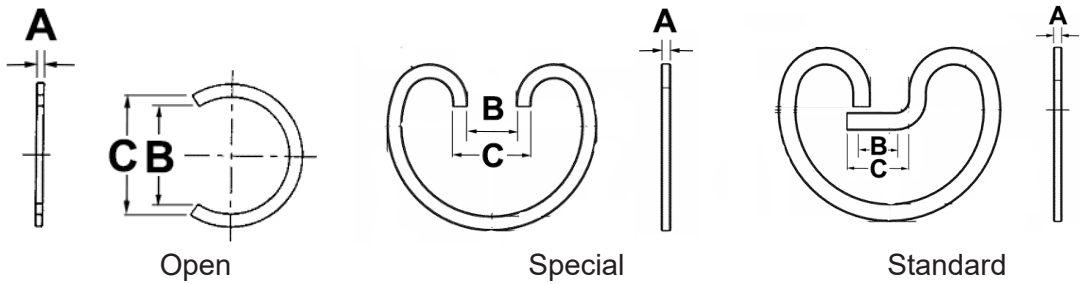

DL Series	Type	A Thickness	Color	B Nominal Id	C Nominal Od	Quantity	Part Number
20R/25R							
20R/25R	Open	0.078	black	***	2.290	4	6-7331
3R Series A-3.563 B-1.125 C-2.563							
3R	Open	0.089	black	0.995	***	100	1-8297
600							
600	Open	0.050	black	0.838	***	100	1-1077
7260 Series A-3.000 B-1.078 C-2.125							
7260	Open	0.062	copper	0.964	***	100	1-1771
***	Open	0.059	black	0.965	***	100	1-7700
***	Open	0.094	black	0.909	***	100	1-7180
***	Open	0.095	black	1.013	***	100	1-7330
1310/1330							
1310/1330	Standard	0.058	copper	***	1.215	100	3-7820
1310/1330	Standard	0.059	black	***	1.190	100	3-7700


SNAP RING (Cont'd)

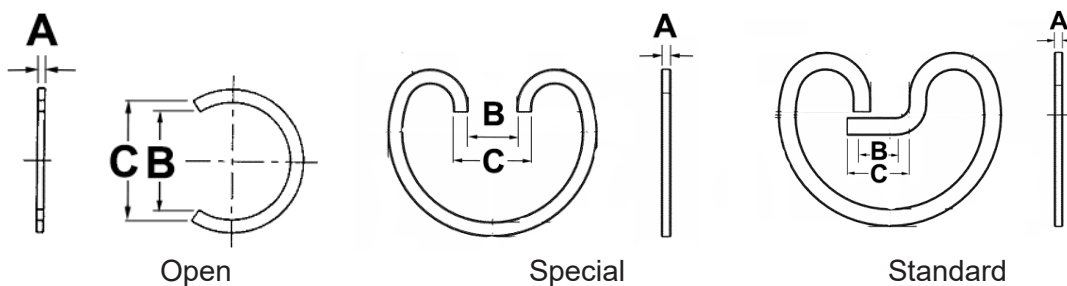

DL Series	Type	A Thickness	Color	B Nominal Id	C Nominal Od	Quantity	Part Number
1310/1330							
1310/1330	Standard	0.061	white	***	1.205	100	3-7705
1310/1330	Standard	0.063	blue	***	1.205	100	3-7706
1350/1410							
1350/1410	Open	0.061	***	1.000	1.189	***	3-2440
1350/1410	Special	0.059	grey	***	1.328	100	3-7801
1350/1410	Standard	0.056	gray	***	1.314	100	3-7810
1350/1410	Standard	0.058	Copper	***	1.245	***	3-0770
1350/1410	Standard	0.058	***	***	1.360	***	3-2070
1350/1410	Standard	0.058	***	***	1.641	***	3-8000
1350/1410	Standard	0.059	black	***	1.370	4500	3-7811B4500
1350/1410	Standard	0.059	black	***	1.370	100	3-7811
1350/1410	Standard	0.060	red	***	1.370	4500	3-7812B4500
1350/1410	Standard	0.060	red	***	1.370	100	3-7812
1350/1410	Standard	0.061	white	***	1.370	4000	3-7813B4000
1350/1410	Standard	0.061	white	***	1.370	100	3-7813
1350/1410	Standard	0.062	brown	***	1.370	4000	3-7814B4000
1350/1410	Standard	0.062	brown	***	1.370	100	3-7814
1350/1410	Standard	0.063	yellow	***	1.370	4000	3-7815B4000
1350/1410	Standard	0.063	yellow	***	1.370	100	3-7815
1350/1410	Standard	0.064	grey	***	1.370	4000	3-7816B4000
1350/1410	Standard	0.064	grey	***	1.370	100	3-7816
1350/1410	Standard	0.065	blue	***	1.370	4000	3-7817B4000
1350/1410	Standard	0.065	blue	***	1.370	100	3-7817
1350/1410	Standard	0.066	violet	***	1.370	4000	3-7818B4000
1350/1410	Standard	0.066	violet	***	1.370	100	3-7818
1350/1410	Standard	0.067	pink	***	1.370	4000	3-7819B4000
1350/1410	Standard	0.067	pink	***	1.370	100	3-7819
1485							
1485	Standard	0.057	silver	***	1.500	100	3-7805

SMALL PARTS

DRIVESHAFT BOOT



DL Series	Material	D/E Inside Dia.	F Length	Apexes	Bell Dia.	Grease (grams)	Inboard/ outboard	Installed Approximate Length	Non-installed approximate Length	Shaft Dia.	Quantity	Part Number
***	Rubber	1.656 / 1.656	3.109	3	***	***	***	***	***	***	1	N2112504
***	Neoprene	2.590/0.76	4.135	3	3.020	85	***	4.135	4.135	0.750	***	85-0914
***	Neoprene	2.920/0.76	4.135	3	3.370	85	***	4.135	4.135	0.750	***	85-0900
***	Rubber	4.516 / 4.516	7.797	8	***	***	***	***	***	***	1	N211959X
NPL170/250, SPL170/250												
***	Rubber	0.728/2.488	4.098	6	2.988	***	Outboard	3.349	4.098	0.875	1	NOE-09-9451-A
***	Rubber	0.826/2.909	4.224	6	3.666	***	Outboard	3.566	4.224	0.880	1	NOE-09-9452-A
***	Rubber	0.860/3.125	3.540	4	***	***	***	***	3.540	***	1	NOE-09-9896-A
NPL170/250, SPL170/250*	Rubber	3.42 / 3.42	5.850	***	***	***	***	***	***	***	1	N5009494X
NPL170/250, SPL170/250*	Rubber	3.42 / 3.42	5.850	***	***	***	***	***	***	***	1	N5009494X1
***	Rubber	4.156 / 4.203	10.703	11	***	***	***	***	***	***	1	N211987X
NPL170/250, SPL170/250*	Rubber	4.51 / 4.51	7.800	***	***	***	***	***	***	***	1	N211959X1
NPL170/SPL170												
NPL170/SPL170*	Rubber	3.69 / 3.69	7.950	***	***	***	***	***	***	***	1	N212059X
N90/N100												
N90/N100	Rubber	2.810	8.740	13	***	***	***	***	***	***	***	N212146X

* SPL - Spicer ® Life Series driveshafts is a registered trademark of Dana Limited

WASHER



Inside Dia.	Outside Dia.	Thickness	Quantity	Part Number
0.750	1.250	0.188	4	N500357-17
1.281	2.750	0.125	4	N230123-6

BALL SEAL



DL Series	A Ball Dia.	C Seal Outside Dia.	D Seal Height	Part Number
1310 thru 1350				
1310 thru 1350	1.125	1.342	0.163	N2-86-1298
1310 thru 1350	***	***	***	N2-86-418

SHAFT NUT



Thread Dia.	Flange Dia.	Width Across Flats	Thickness	Quantity	Part Number
1-20 UNEF	***	1.281	0.562	4	N16-74-101
1-1/4-18 UNEF	2.062	1.625	0.625	4	N231502
1-1/4-18 UNEF	2.500	1.625	0.625	1	N20-74-91

SMALL PARTS

LUBE FITTING



Thread Dia.	Overall Length	Type	Quantity	Part Number
1/8 PTF	0.688	Standard	10	0610-B
10-32 NF	0.344	Flush	10	2920
1/4-28 NF Tapered	0.438	Flush	10	2915
1/4-28 NF Tapered	0.594	Standard	20	0641-B
1/4-28 UNF	0.469	Standard	10	1981

MULTI PURPOSE RETAINING RING

Thickness	Inside Dia.	Outside Dia.	Ring Plier Dia.	Quantity	Part Number
0.037	***	0.942	0.166	1	NOE-99-7809-A
0.059	1.098	***	0.197	1	NOE-99-0481-A
0.350	1.500	1.625	***	1	N231259

DRIVESHAFT CENTERING TOOL

DL Series	Used With U-joint	Part Number
1480*	3-0188	1480
1550*	3-0155	1550
1600/1610*	4-0279	1600-1610
1700/1710*	5-0280	1700-1710
1760 Series A-7.000 B-1.938		
1760*	6-0407	1760
1810 Series A-7.547 B-1.938		
1810*	6-0281	1810
2R		
2R*	1-3600 / 1-3650	2R
55N		
55N*	3-0045	55N
L12N		
L12N*	1-1275	L12N
L14N		
L14N*	1-2075	L14N
L16N/35N		
L16N/35N*	2-2275	L16N-35N
NPL-170		
NPL-170*	6-1170	SPL-170
NPL-250		
NPL-250*	6-1250	SPL-250
NPL-90		
NPL-90*	4-1090	SPL-90
PL-140		
PL-140*	***	SPL-140
RPL-20		
RPL-20*	6-0020	RPL-20
RPL-25		
RPL-25*	6-0025	RPL-25

U-JOINT FASTENER BOLT KIT

Grade	Length	Thread Dia.	Quantity	Part Number
8	1.750	1/2-20 UNF	4	NCSC8-20-52

* SPL - Spicer ® Life Series driveshafts is a registered trademark of Dana Limited

STRAP

DL Series	Bearing Dia.	Bolt Hole Dia.	CL To CL	Strap Width	Used With U-joint	Used With UJ Strap Kit	Quantity	Part Number
7260 Series A-3.000 B-1.078 C-2.125								
7260	1.078	0.265	1.500	0.560	1-6300 / 1-6301	1-0023	20	72620

HARDWARE KIT

Used With U-joint	Description	Quantity	Part Number
1-6300	Contains: (4) Snap rings, .059 thk., .952 id., (1), 0641-B Zerk, (1) plastic lube plug	1	1-2822
6-0675 / 6-0676 / 6-0677	Fits driveline series 1710-1810. Contains: (4) ea. bearing strap and lockstrap bolts, (2) ea. bearing straps and lockstraps, (2) lube fittings.	1	1-2865

PTO YOKE & SHAFT ALIGNMENT KEY

Description	Quantity	Part Number
Contains (25): Width: 0.187" x Height: 0.187", Length: 1.0"	25	50-1501
Contains (25): Width: 0.250" x Height: 0.250", Length: 1.0"	25	50-1502
Contains (25): Width: 0.312" x Height: 0.312", Length: 1.0"	25	50-1503
Contains (25): Width: 0.1875" x Height: 0.422", Length: 1.0"	25	50-1504
Contains (25): Width: 0.250" x Height: 0.422", Length: 1.0"	25	50-1505
Contains (25): Width: 0.3125" x Height: 0.422", Length: 1.0"	25	50-1506
Contains (25): Width: 0.312" x Height: 0.289", Step wdth.: 0.250", Step hgt.: 0.131", Length: 1.25"	25	50-1511
Width: 0.187" x Height: 0.187", Length: 12.0"	1	50-3501
Width: 0.250" x Height: 0.250", Length: 12.0"	1	50-3502
Width: 0.312" x Height: 0.312", Length: 12.0"	1	50-3503
Width: 0.312" x Height: 0.289", Step wdth.: 0.250", Step hgt.: 0.131", Length: 12.0"	1	50-3511
Width: 0.250" x Height: 0.226", Step wdth.: 0.187", Step hgt.: 0.100", Length: 12.0"	1	50-3512
Width: 0.375" x Height: 0.352", Step wdth.: 0.312", Step hgt.: 0.162", Length: 12.0"	1	50-3513

SMALL PARTS

PTO TUBE PIN

Description	Quantity	Part Number
Contains (10): OD: 0.339", Length: 1.968"	10	50-0112
Contains (10): OD: 0.339", ID: 0.315", Length: 2.36"	10	50-0412
Contains (10): OD: 0.417", ID: 0.394", Length: 2.95"	10	50-0512
Contains (10): OD: 0.417", ID: 0.394", Length: 2.76"	10	50-0612
Contains (10): OD: 0.417", ID: 0.394", Length: 3.15"	10	50-1080
Contains (10): OD: 0.417", ID: 0.394", Length: 3.54"	10	50-1090
Contains (10): OD: 0.496", ID: 0.472", Length: 3.15"	10	50-1280
Contains (10): OD: 0.339", ID: 0.315", Length: 2.65"	10	50-2212
Contains (10): OD: 0.417", ID: 0.394", Length: 2.65"	10	50-2312

PTO REPAIR KIT

Inside Dia.	Outside Dia.	Series	Width	Description	Quantity	Part Number
***	***	***	***	Contains (2) 0666 nylon bearings, (1) 0667 lock ring	1	56-0666
***	***	***	***	Contains (2) BPB2-101 retainer I/O	2	56-2101
***	***	***	***	Contains (2) BPB2-102 retainer I/O	2	56-2102
***	***	***	***	Contains (2) WSB2-2122 retainer I/O	2	56-2122
***	***	***	***	Contains (2) WSB4-2223 retainer I/O	2	56-2223
***	***	***	***	Contains (2) BPB4-103 retainer I/O	2	56-4103
***	***	***	***	Contains (2) BPB6-106 retainer I/O	2	56-6106
***	***	***	***	Contains (2) BPB8-108 retainer I/O	1	56-8108
2.000	2.281	2000, 2200	0.250	Contains (1) Nylon Bearing	1	56-2295
***	***	***	***	Contains (1) Pin 1.79" x 0.31", (1) spring 1.19" x 0.47". (1) washer 0.59" x 0.06"	3	56-0040
***	***	***	***	Contains (1) CL301 back up ring, (1) CL304 spring, (1) CL303 collar, (1) CL302 back up ring, (1) QL 205 snap ring and (3) 0.5" balls	8	56-0200
***	***	***	***	Contains (2) WPB2-06 retainers, 1000 series, 1.519" ID	2	56-0600
***	***	***	***	Contains (2) Nylon Bearing, 0.25" thk.	2	56-0604
***	***	***	***	Contains (1) 0611-1 spring, (1) 0613 snap ring, (2) 0614 balls, (1) 0615 collar	5	56-0615
***	***	***	***	Contains (2) WPB8-44 retainers, 44 series, 2.636" ID	2	56-0844
***	***	***	***	Contains (2) WPB2-L6 retainers, L600 series, 1.828" ID	2	56-1600
***	***	***	***	Contains (1) 0626-1 spring, (1) 1856-1 pin	2	56-1857

PTO REPAIR KIT (Cont'd)

Inside Dia.	Outside Dia.	Series	Width	Description	Quantity	Part Number
***	***	***	***	Contains (2) WPB4-20 retainers, 2000 series, 2.00" ID	2	56-2000
***	***	***	***	Contains (3) 2004 nylon shield bearings, 0.31" thk.	3	56-2004
***	***	***	***	Contains (2) WPB6-22 retainers, 2200 series, 2.00" ID	2	56-2200
***	***	***	***	Contains (1) Nylon Bearing, 2.00" ID, 0.25" thk.	1	56-2294
***	***	***	***	Contains (1) 1899 nylon bearing, (1) 2297 lock ring, (1) 2298 washer	3	56-2300
***	***	***	***	Contains (2) WSB6-2324 retainer I/O	2	56-2324
***	***	***	***	Contains (1) 0626-1 spring, (1) 2446 pin	2	56-2446
***	***	***	***	Contains (2) WPB8-26 retainers, 2600 series, 2.868" ID	2	56-2600
***	***	***	***	Contains (4) 2604 nylon shield bearings, 0.31" thk.	4	56-2604
***	***	***	***	Contains (1) Nylon Bearing, 2.54" ID, 0.25" thk.	1	56-2646
***	***	***	***	Contains (1) 0613-2 lock ring, (4) 0614-1 bearings, (1) 2663 spring, (1) 2669 QD collar	7	56-2669
***	***	***	***	Contains (1) 2286-4 lock ring, (3) JD-51019 bearings, (1) SC-1 slide collar, (1) SC-4 spring	6	56-3001
***	***	***	***	Contains (2) BPB6-105 retainer I/O	2	56-6105
***	***	***	***	Contains (1) 2294-4 nylon bearing, OD: 2.52", ID: 2.01", Thickness: .25"	1	2294-4

PTO COLLAR

Inside Dia.	Outside Dia.	Collar Groove Width	Quantity	Part Number
1.270	2.250	0.349	1	2-1250
1.610	2.250	0.349	1	2-1625
1.900	2.250	0.349	1	2-1880
2.020	2.250	0.349	1	2-2030

PTO CLUTCH YOKE

DL Series	Material	CL To End Of Hub	Housing Dia.	Housing Length	Spline/Number Teeth	Part Number
B&P5	Steel	6.500	3.740	3.000	1.375-6	8-0402
W220	Steel	6.578	3.578	2.125	1.375-6	8-0452
W2200	Steel	5.438	3.740	2.250	1.375-6	8-0403
W2300	Steel	5.594	3.740	2.250	1.375-6	8-0401
W2300	Steel	6.062	3.578	2.125	1.375-6	8-0451
W2400	Steel	6.188	3.578	2.125	1.375-6	8-0450
WI	Steel	5.594	3.740	2.250	1.375-6	8-0400