
### **PRODUCT INFORMATION**

Description	12-24V LED Work Light with Spot Beam Pattern & On/Off Switch
Height	133.35 mm / 5.25 in
Width	137.16 mm / 5.4 in
Depth	47.75 mm / 1.88 in
Shape	Rectangular
Outer Lens Material	Polycarbonate
Outer Lens Color	Clear
Housing Material	Polycarbonate
Housing Color	Black
Mounting Hardware Description	(x1) 5/16"-18 x 1.00" Mounting Bolt
Mounting Type	Universal Pedestal Mount
Minimum Operating Temperature	-40 °C / -40 °F
Maximum Operating Temperature	65 °C / 149 °F
Connector or Wiring	Integrated 2-Pin Deutsch Weather-Proof Socket (DT04-2P)
Mating Connector	2-Pin Deutsch Weather-Proof Plug (DT06-2S)
Product Weight	0.82 lbs / 0.37 kgs
Shipping Weight	1.16 lbs / 0.53 kgs





### **PRODUCT DIMENSIONS**

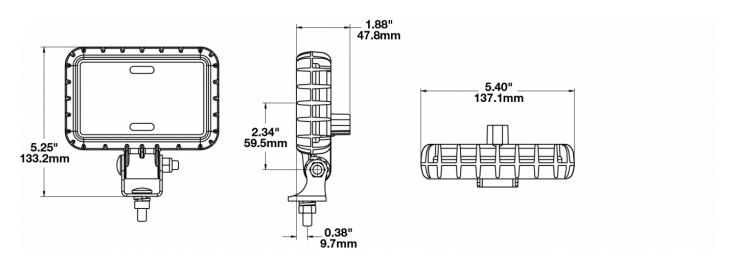

### **ELECTRICAL SPECIFICATIONS**

Input Voltage	12-24V DC
Operating Voltage	9-32V DC
Transient Spike Protection	330V Peak @ 1 HZ-100 Pulses
Red Wire	Positive
Black Wire	Negative
Current Draw	1.20A @ 12V DC 0.60A @ 24V DC

### **REGULATORY STANDARDS COMPLIANCE**


Tested to ECE Reg. 10 (Radiated Emissions only)



Print date: 2024-08-11 © 2024 J.W. Speaker Corporation • Germantown, WI U.S.A. www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660



#### **PHOTOMETRIC SPECIFICATIONS**

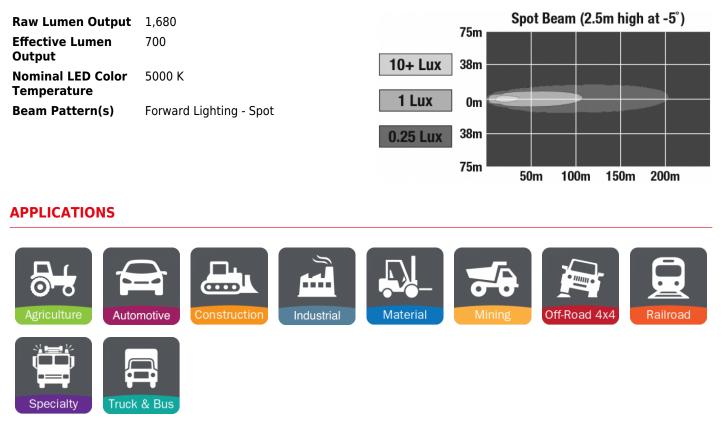

### **PRODUCT WARNINGS**

For California residents:

- A WARNING: Cancer and reproductive harm <u>www.P65Warnings.ca.gov</u>.
- AVERTISSEMENT: Cancer et effet nocif sur la reproduction <u>www.P65Warnings.ca.gov</u>.



#### **ACCESSORIES**





**Part Number** 8200011 Magnet Mount Kit for **XD Series Work Lights** 

**Part Number** 8200101 Stainless Steel Mounting Kit for Work Lights & Marine Lights

### **RELATED PRODUCTS**



Part Number **1603241** with Spot Beam Pattern



Part Number **1603251** with Trapezoid Beam Pattern



Part Number 1603261 with Flood Beam Pattern



Part Number 1603321 with Trapezoid Beam Pattern & On/Off

Switch



Part Number 1603331 12-24V LED Work Light 12-24V LED Work Light 12-24V LED Work Light 12-24V LED Work Light with Flood Beam Pattern & On/Off Switch

