

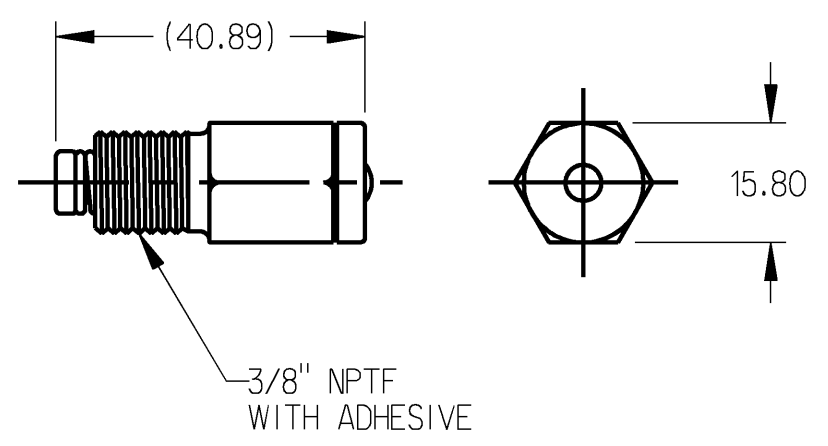
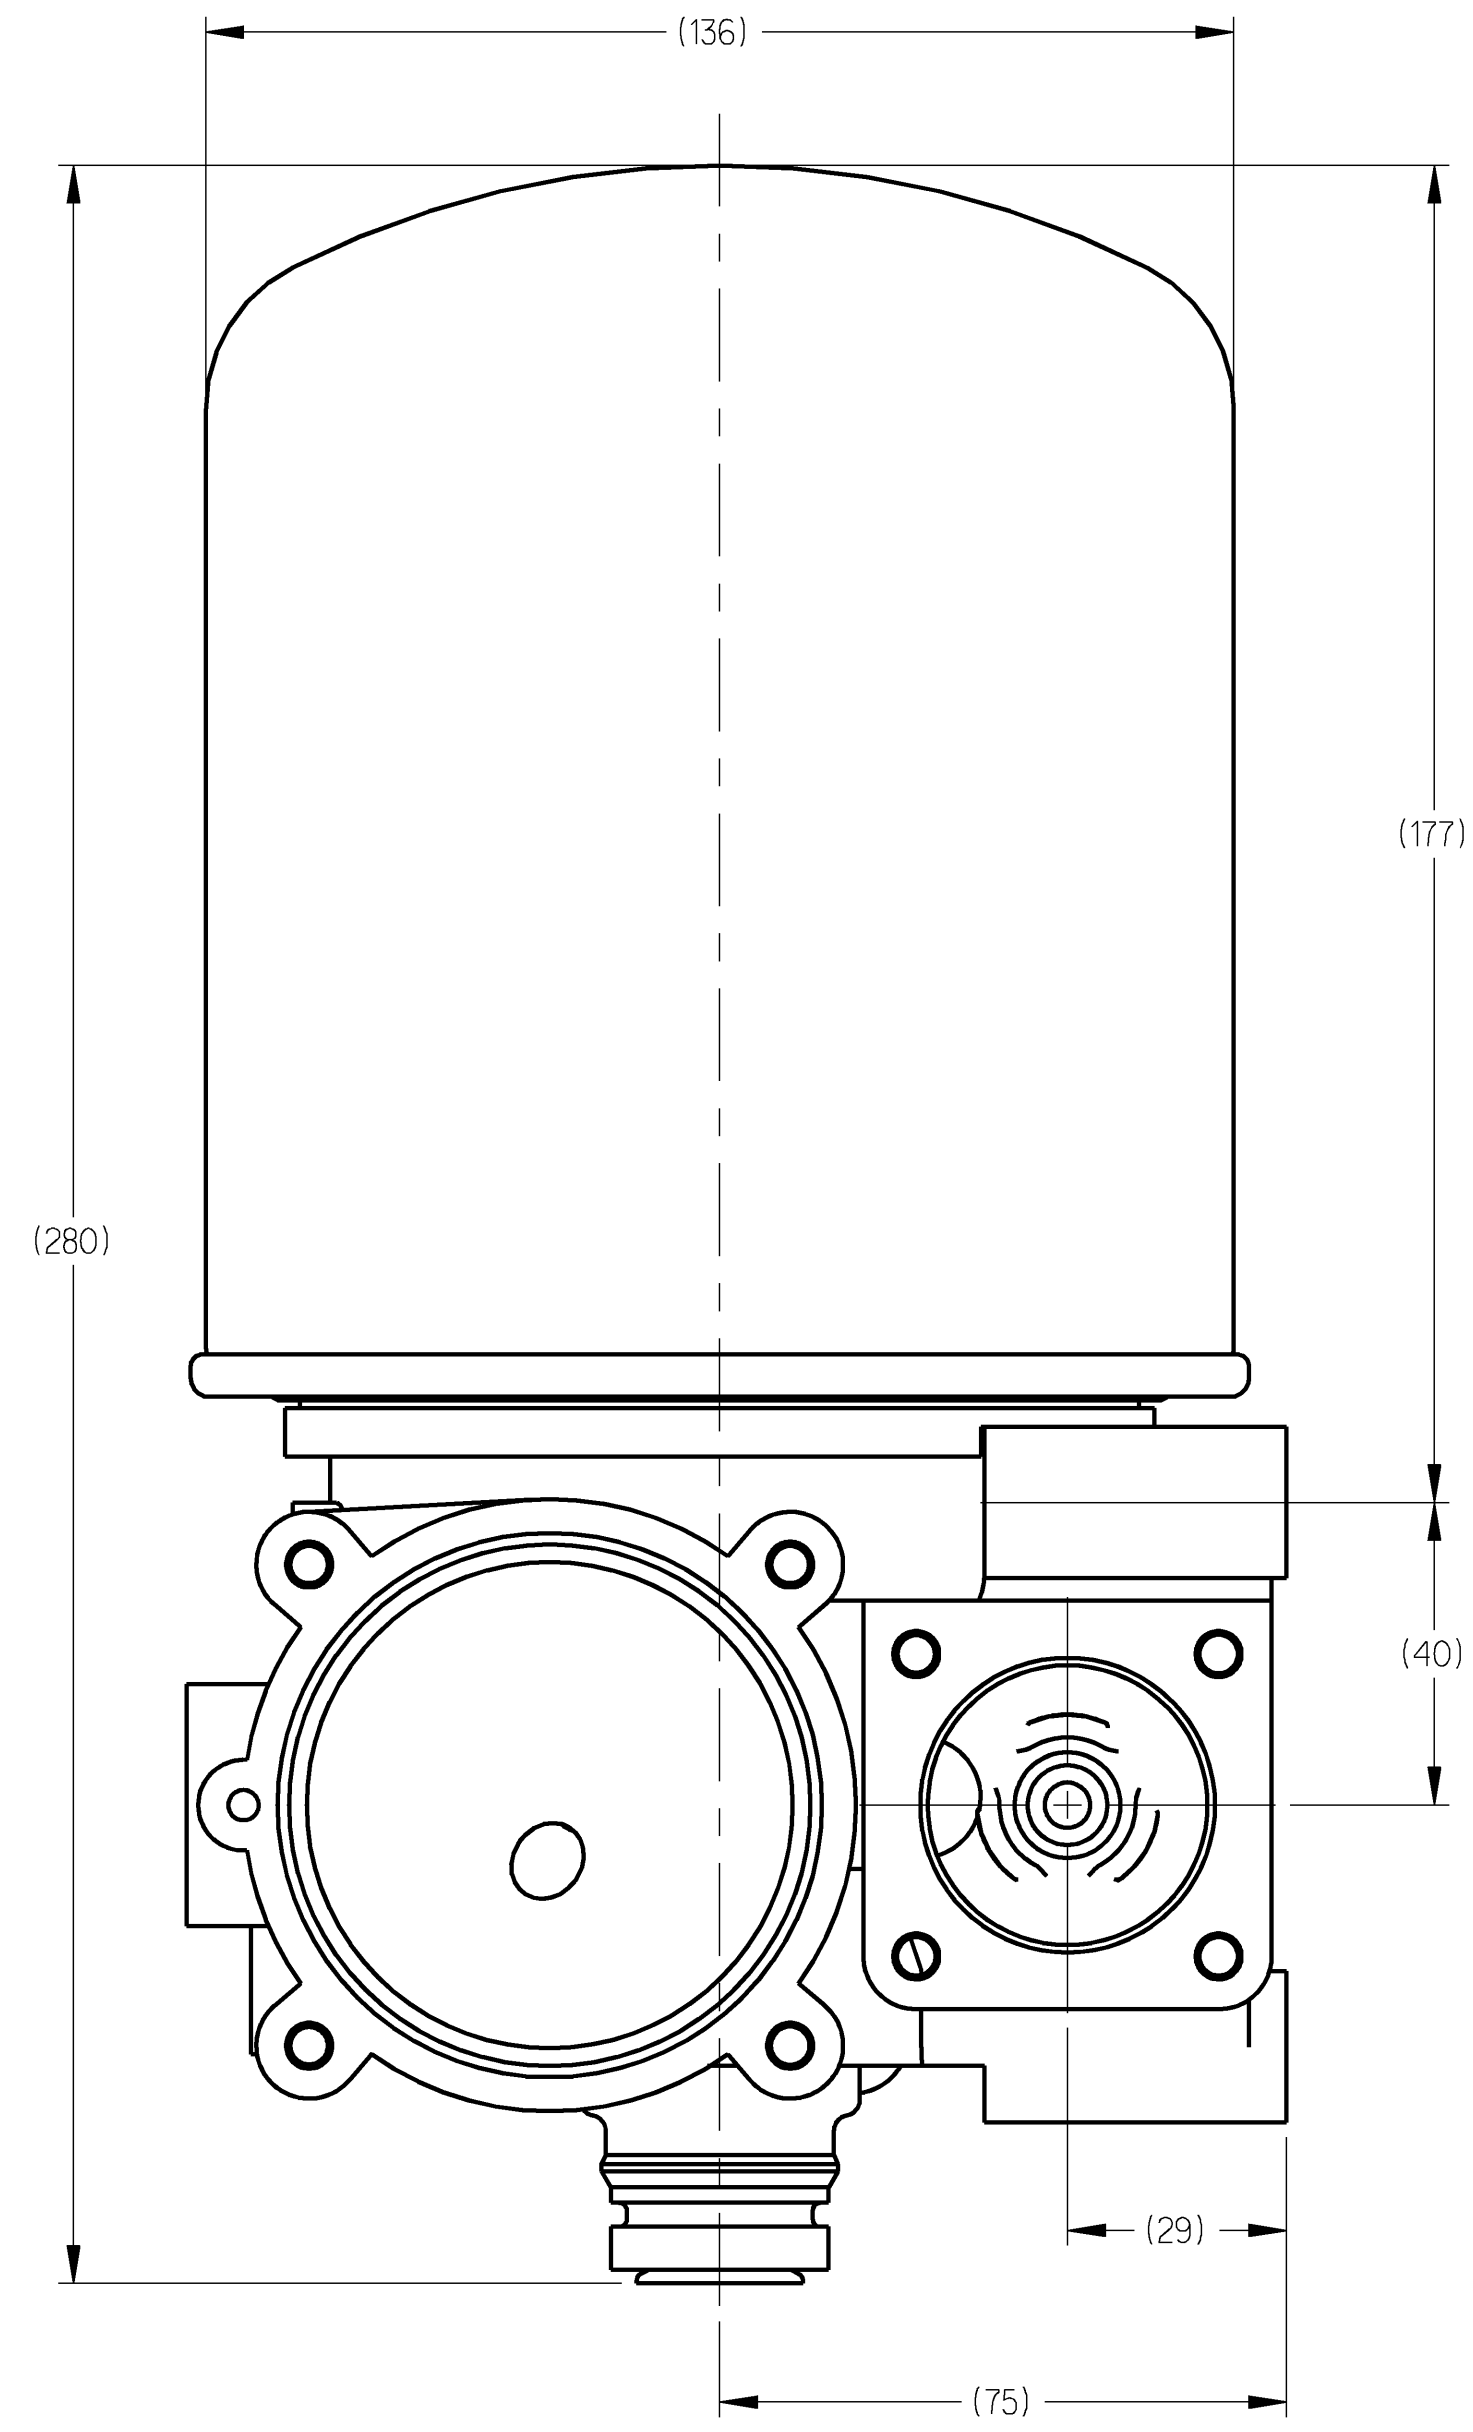
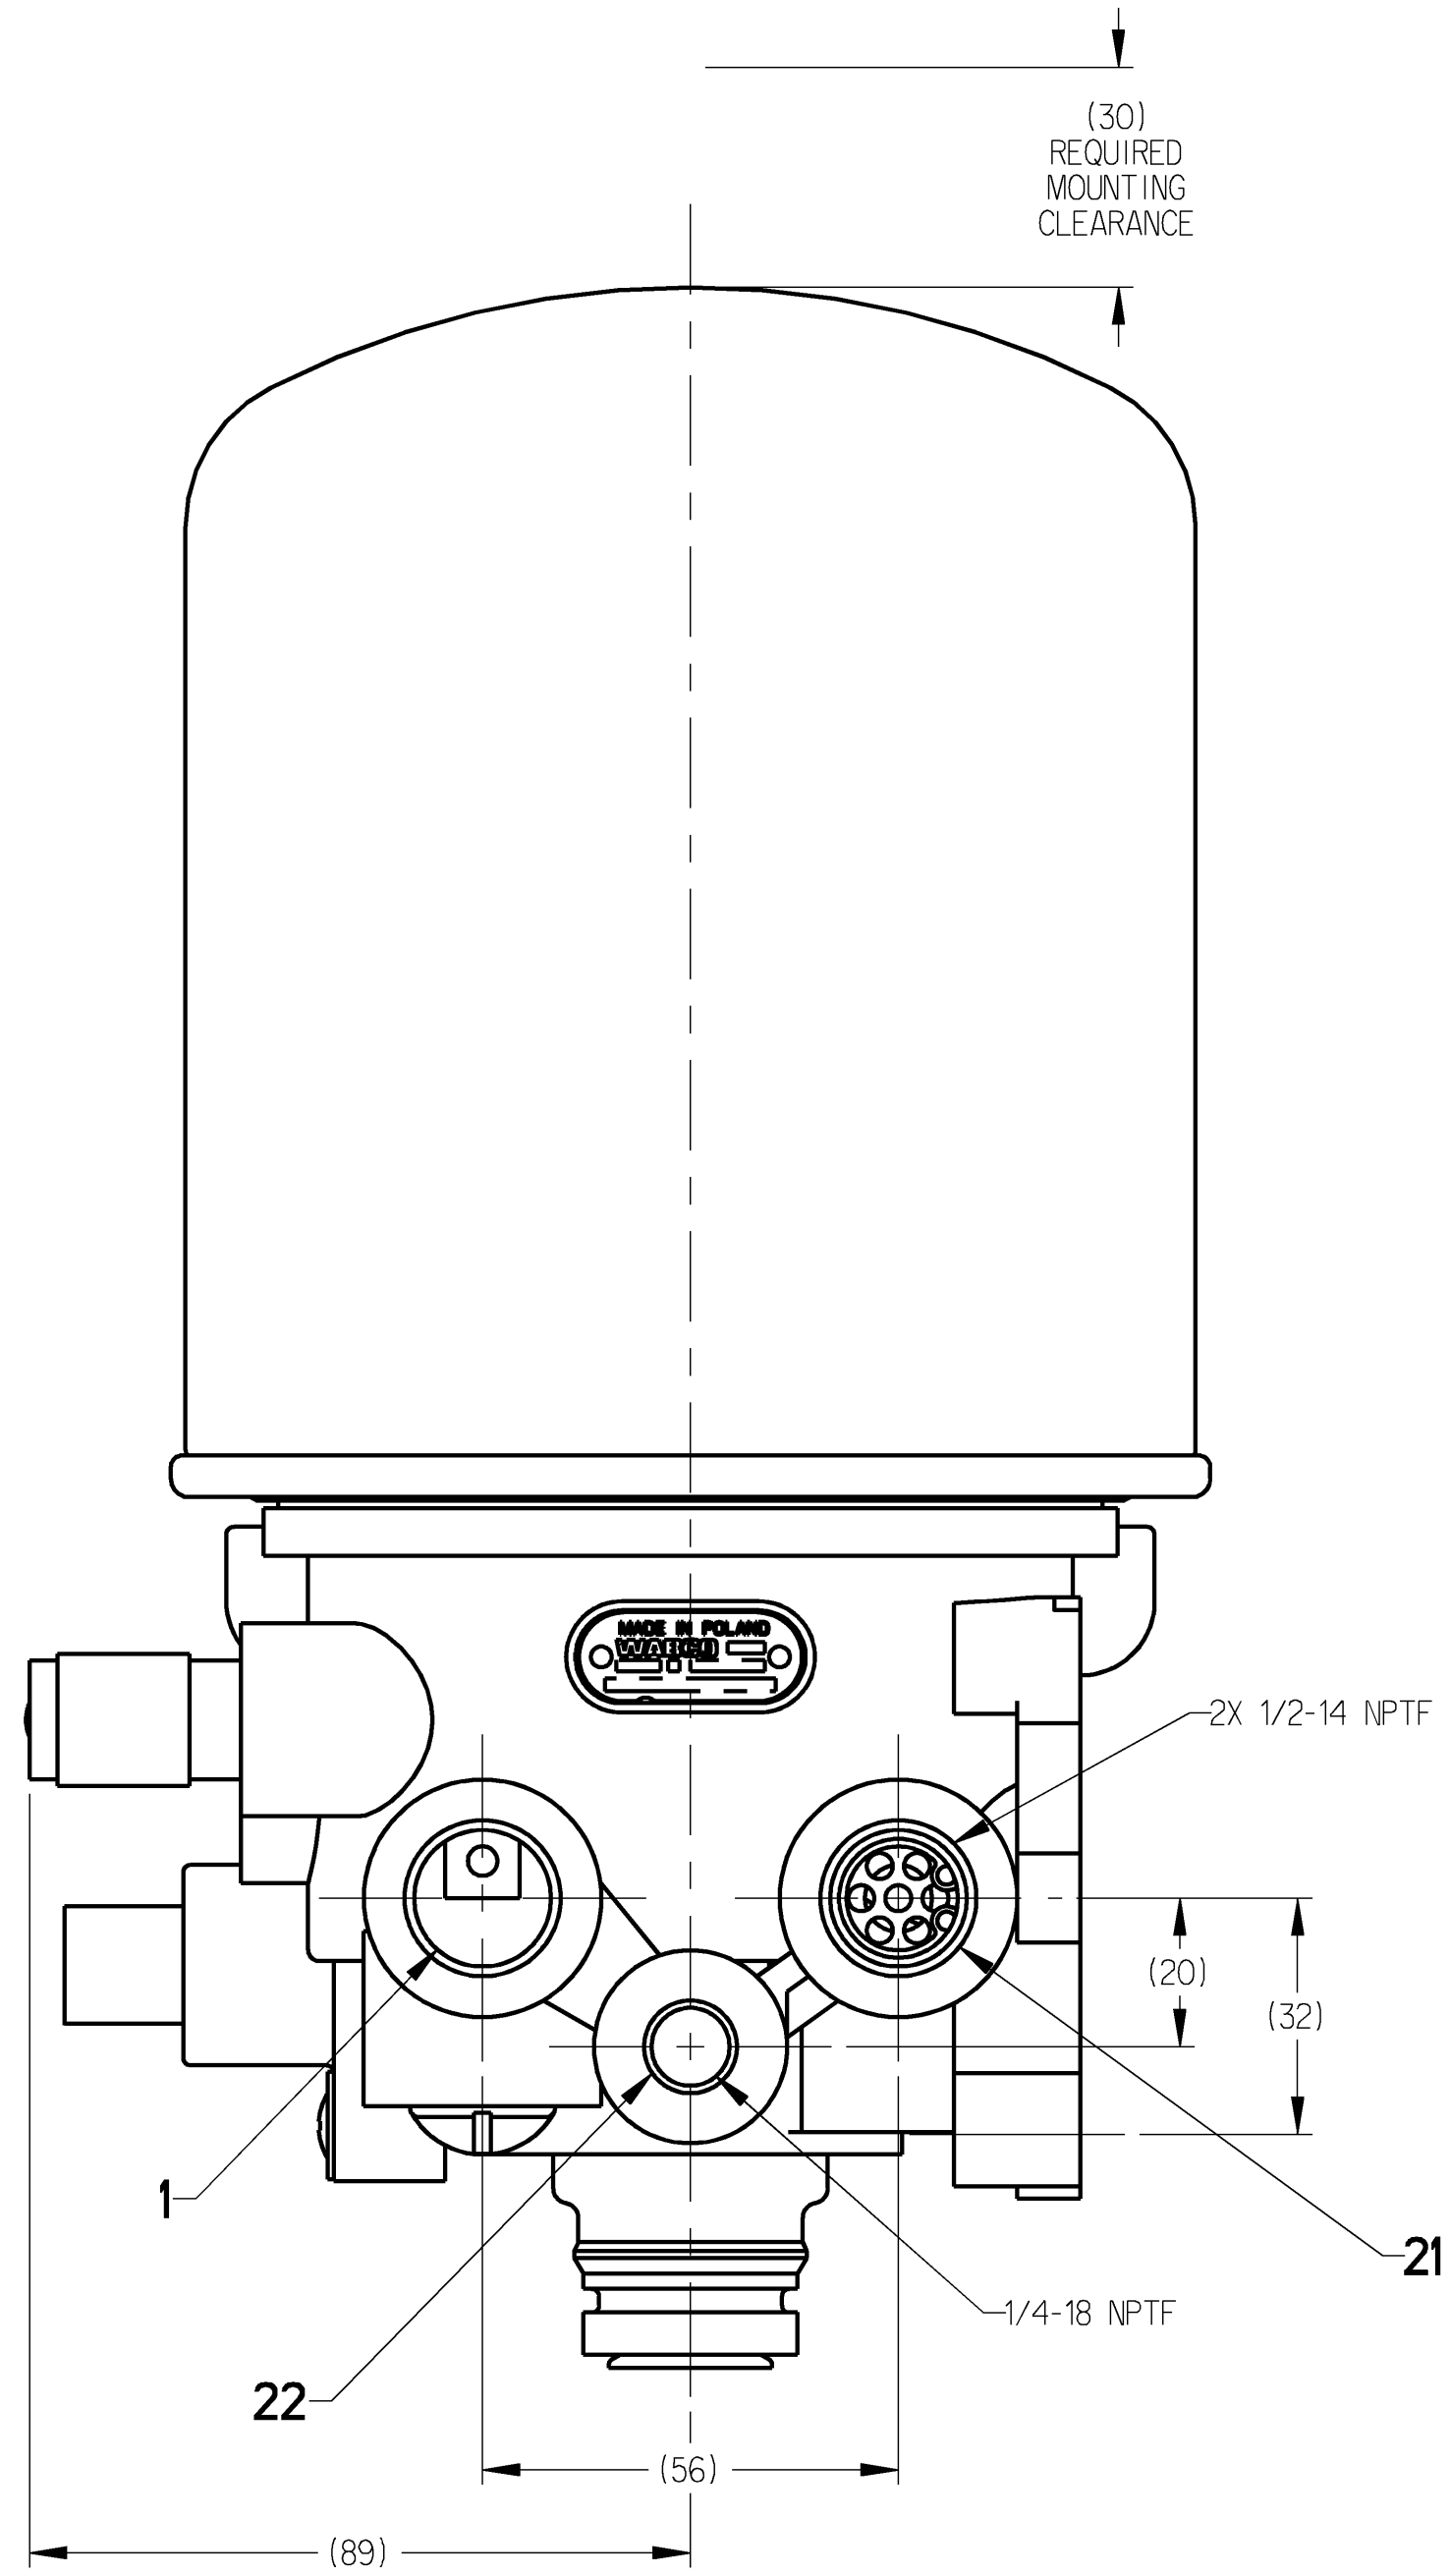


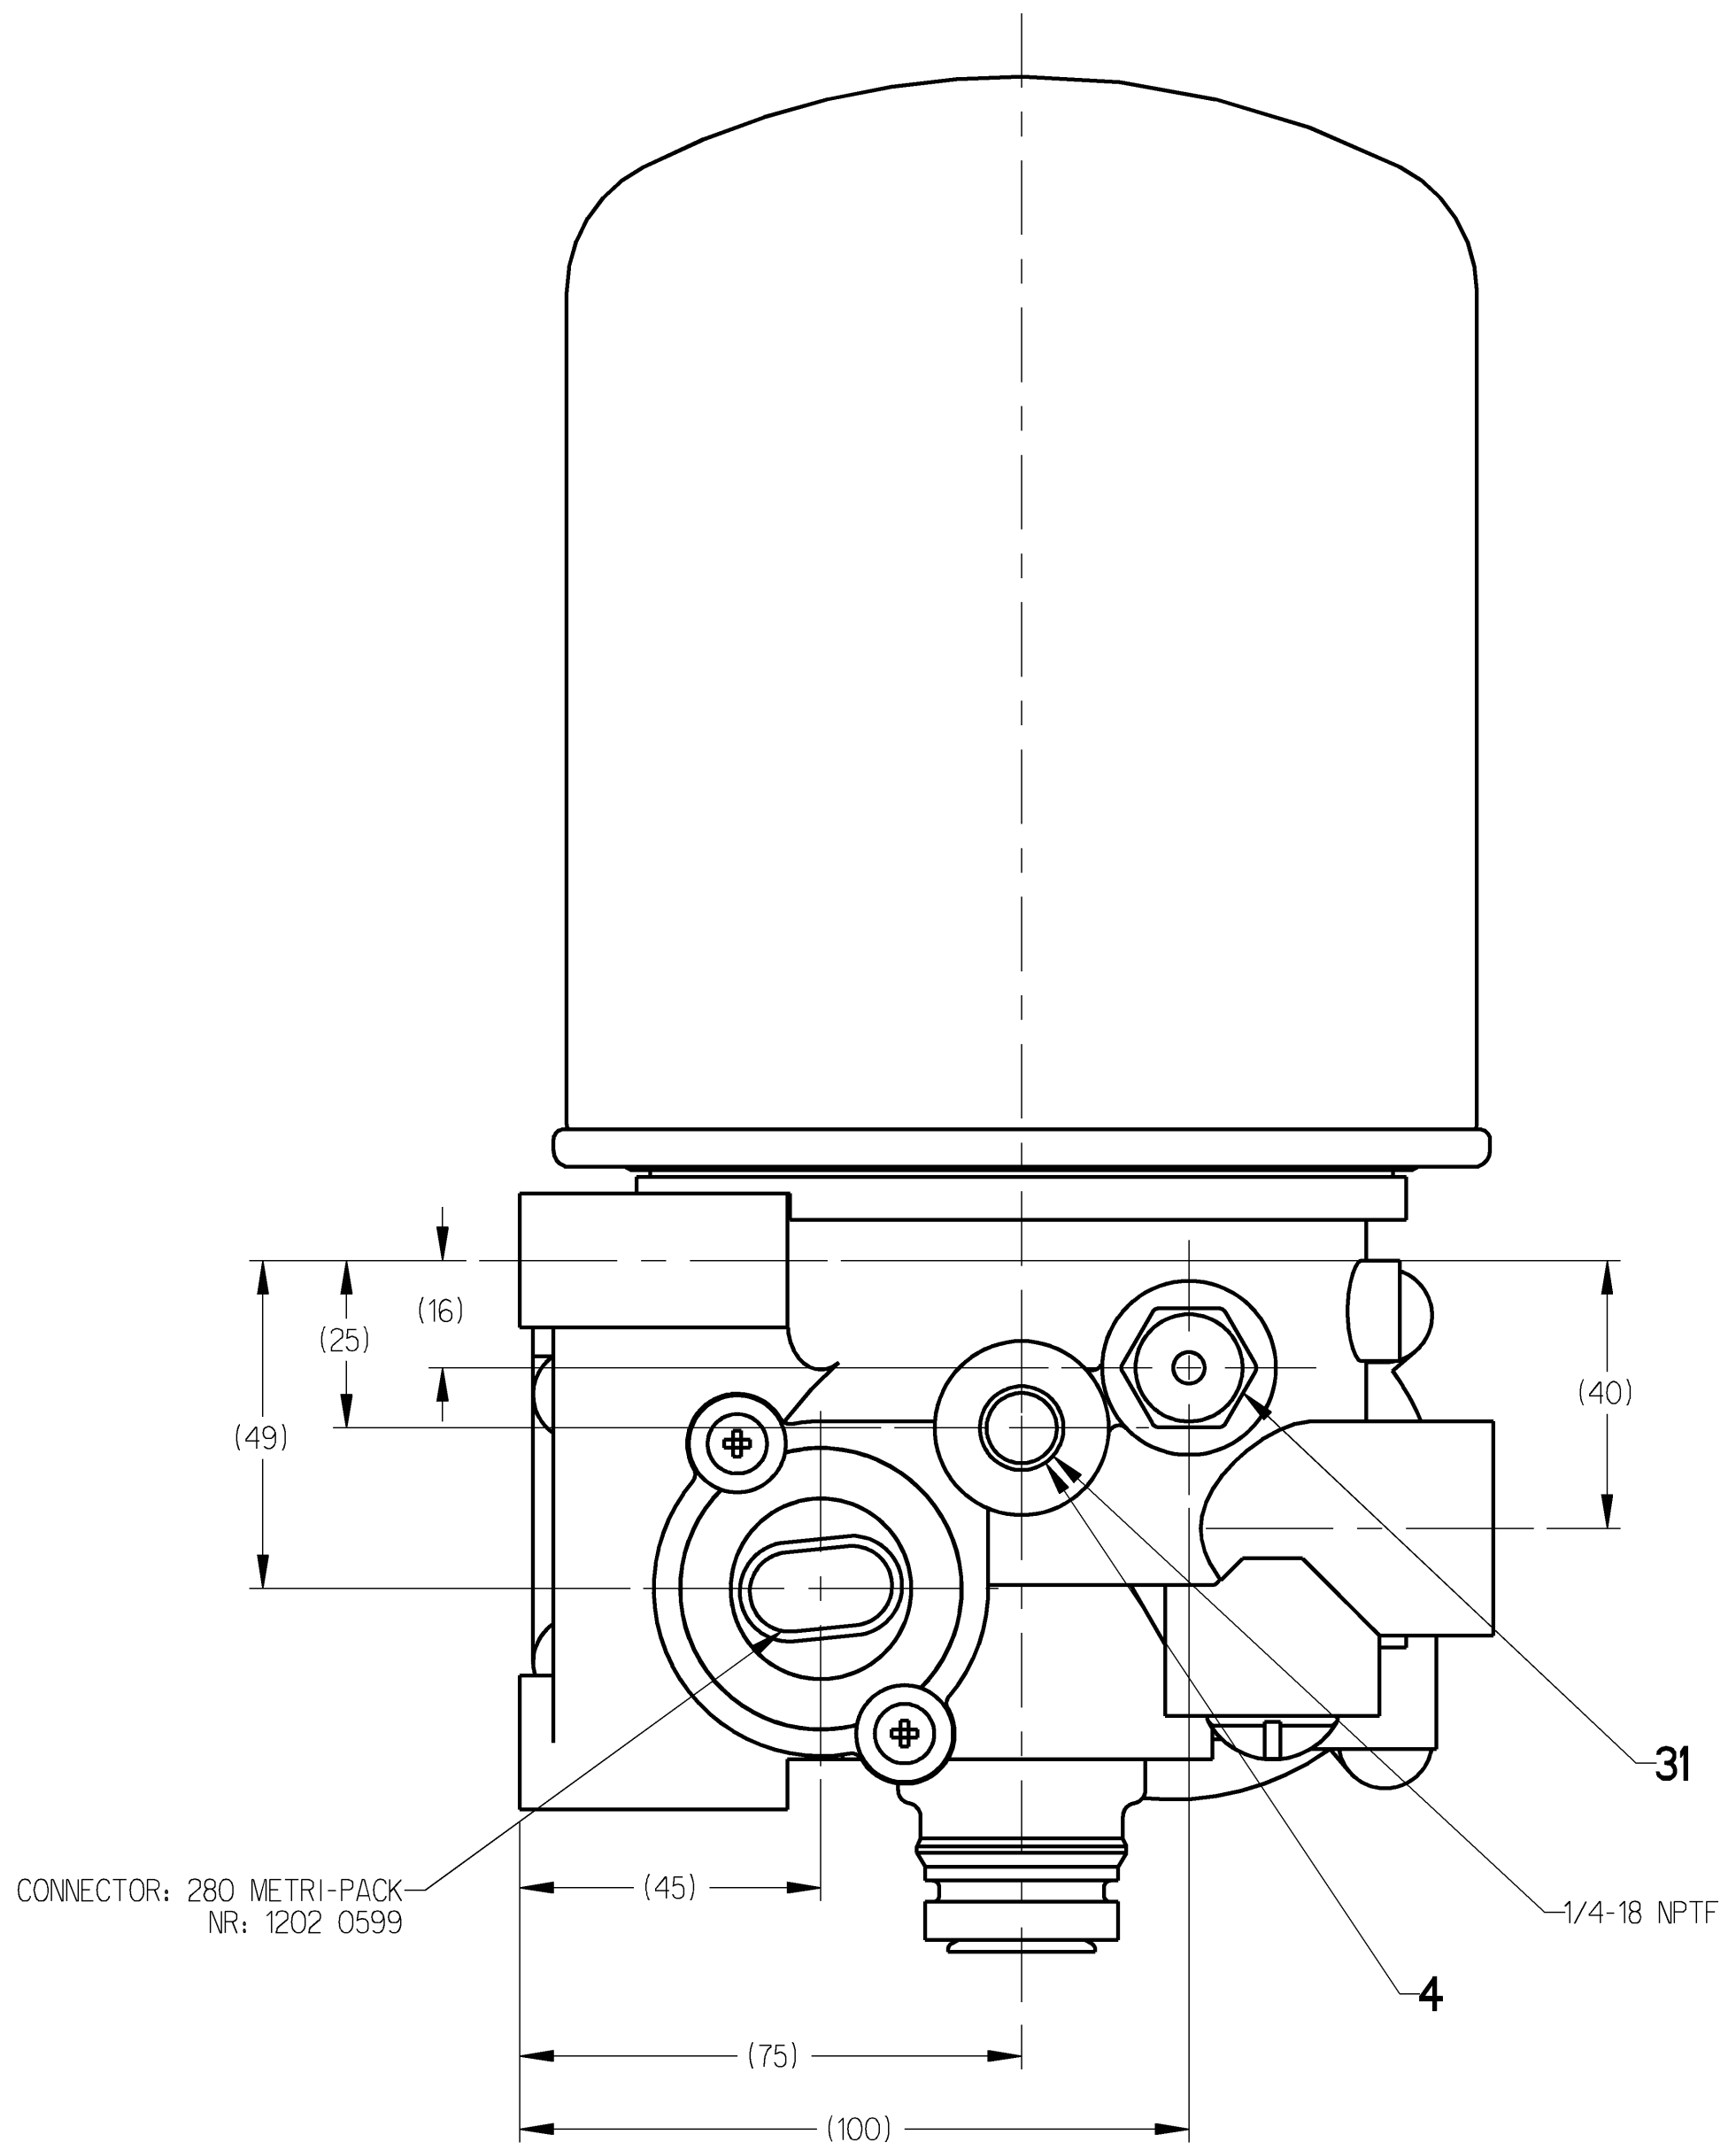

RELIEF VALVE
PART # 2206-D-1126
(INSTALLED ON DRYER)
REMOVED RETORQUE TO 20⁺⁵₀ Nm

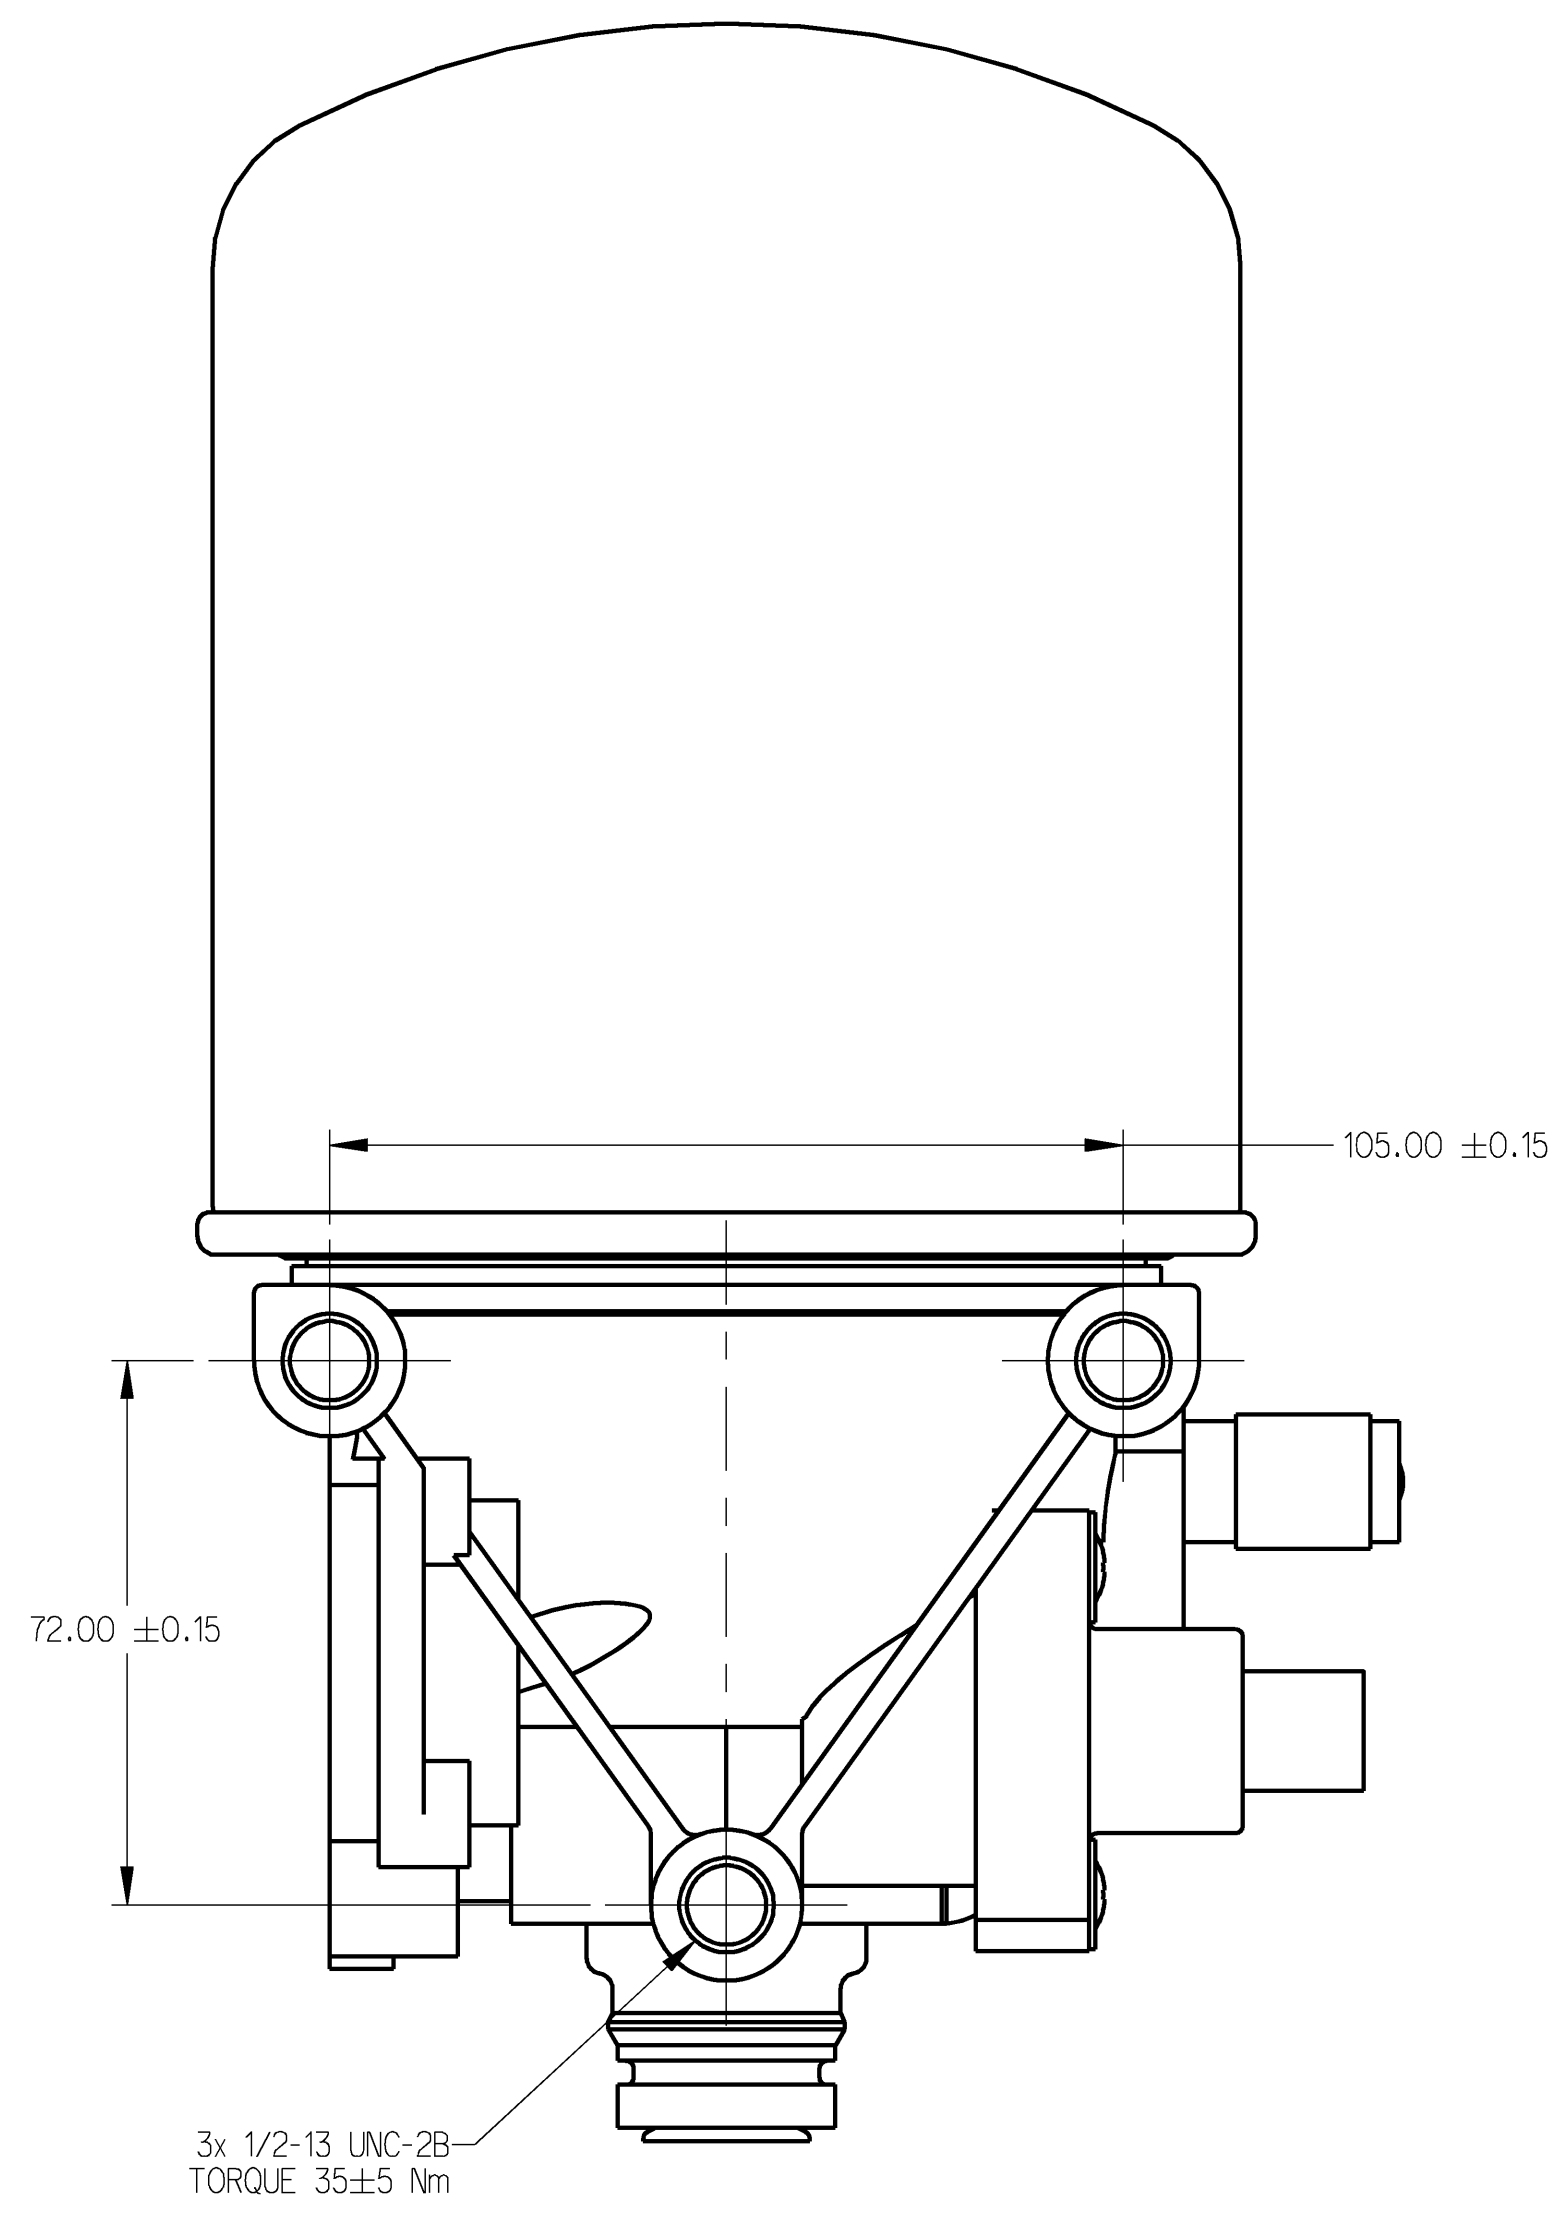

NOTES:



- 1) FOR ALL FURTHER TECHNICAL DATA AND INSTALLATION INSTRUCTIONS REFER TO TP9672 & TP92116.
- 2) THERMAL RANGE OF APPLICATION: $-40^{\circ}\text{C} \dots +80^{\circ}\text{C}$
 $(-40^{\circ}\text{F} \dots +176^{\circ}\text{F})$
- 3) RESISTANCE TO HEAT: $+80^{\circ}\text{C}$
 $(+176^{\circ}\text{F})$
- 4) MEDIUM: COMPRESSED AIR
- 5) WORKING PRESSURE: $P_e \text{ MAX} = 10.3\text{BAR} (150\text{PSI})$
- 6) INSTALLATION POSITION AS DRAWN.
- 7) TORQUE FOR CONNECTIONS: 2-3 TURNS (WITH WRENCH)
FROM FINGER TIGHT
- 8) HEATING:

CUT IN TEMPERATURE: $7^{\circ}\text{C} \pm 6^{\circ}\text{C}$
 $(45^{\circ}\text{F} \pm 11^{\circ}\text{F})$

CUT OFF TEMPERATURE: $29.5^{\circ}\text{C} \pm 3^{\circ}$
 $(85^{\circ} \pm 5^{\circ}\text{F})$
- 9) BATTERY VOLTAGE: $12^{+4}_{-2} \text{ V DC}$

 $24^{+4.8}_{-2.4} \text{ V DC}$
- 10) POWER: 100W WITHOUT CURRENT

 $95 \frac{\text{W}}{\text{Q}}$ WITH 12V DC/24V DC APPLIED ACROSS THE HEATER CONTACTS

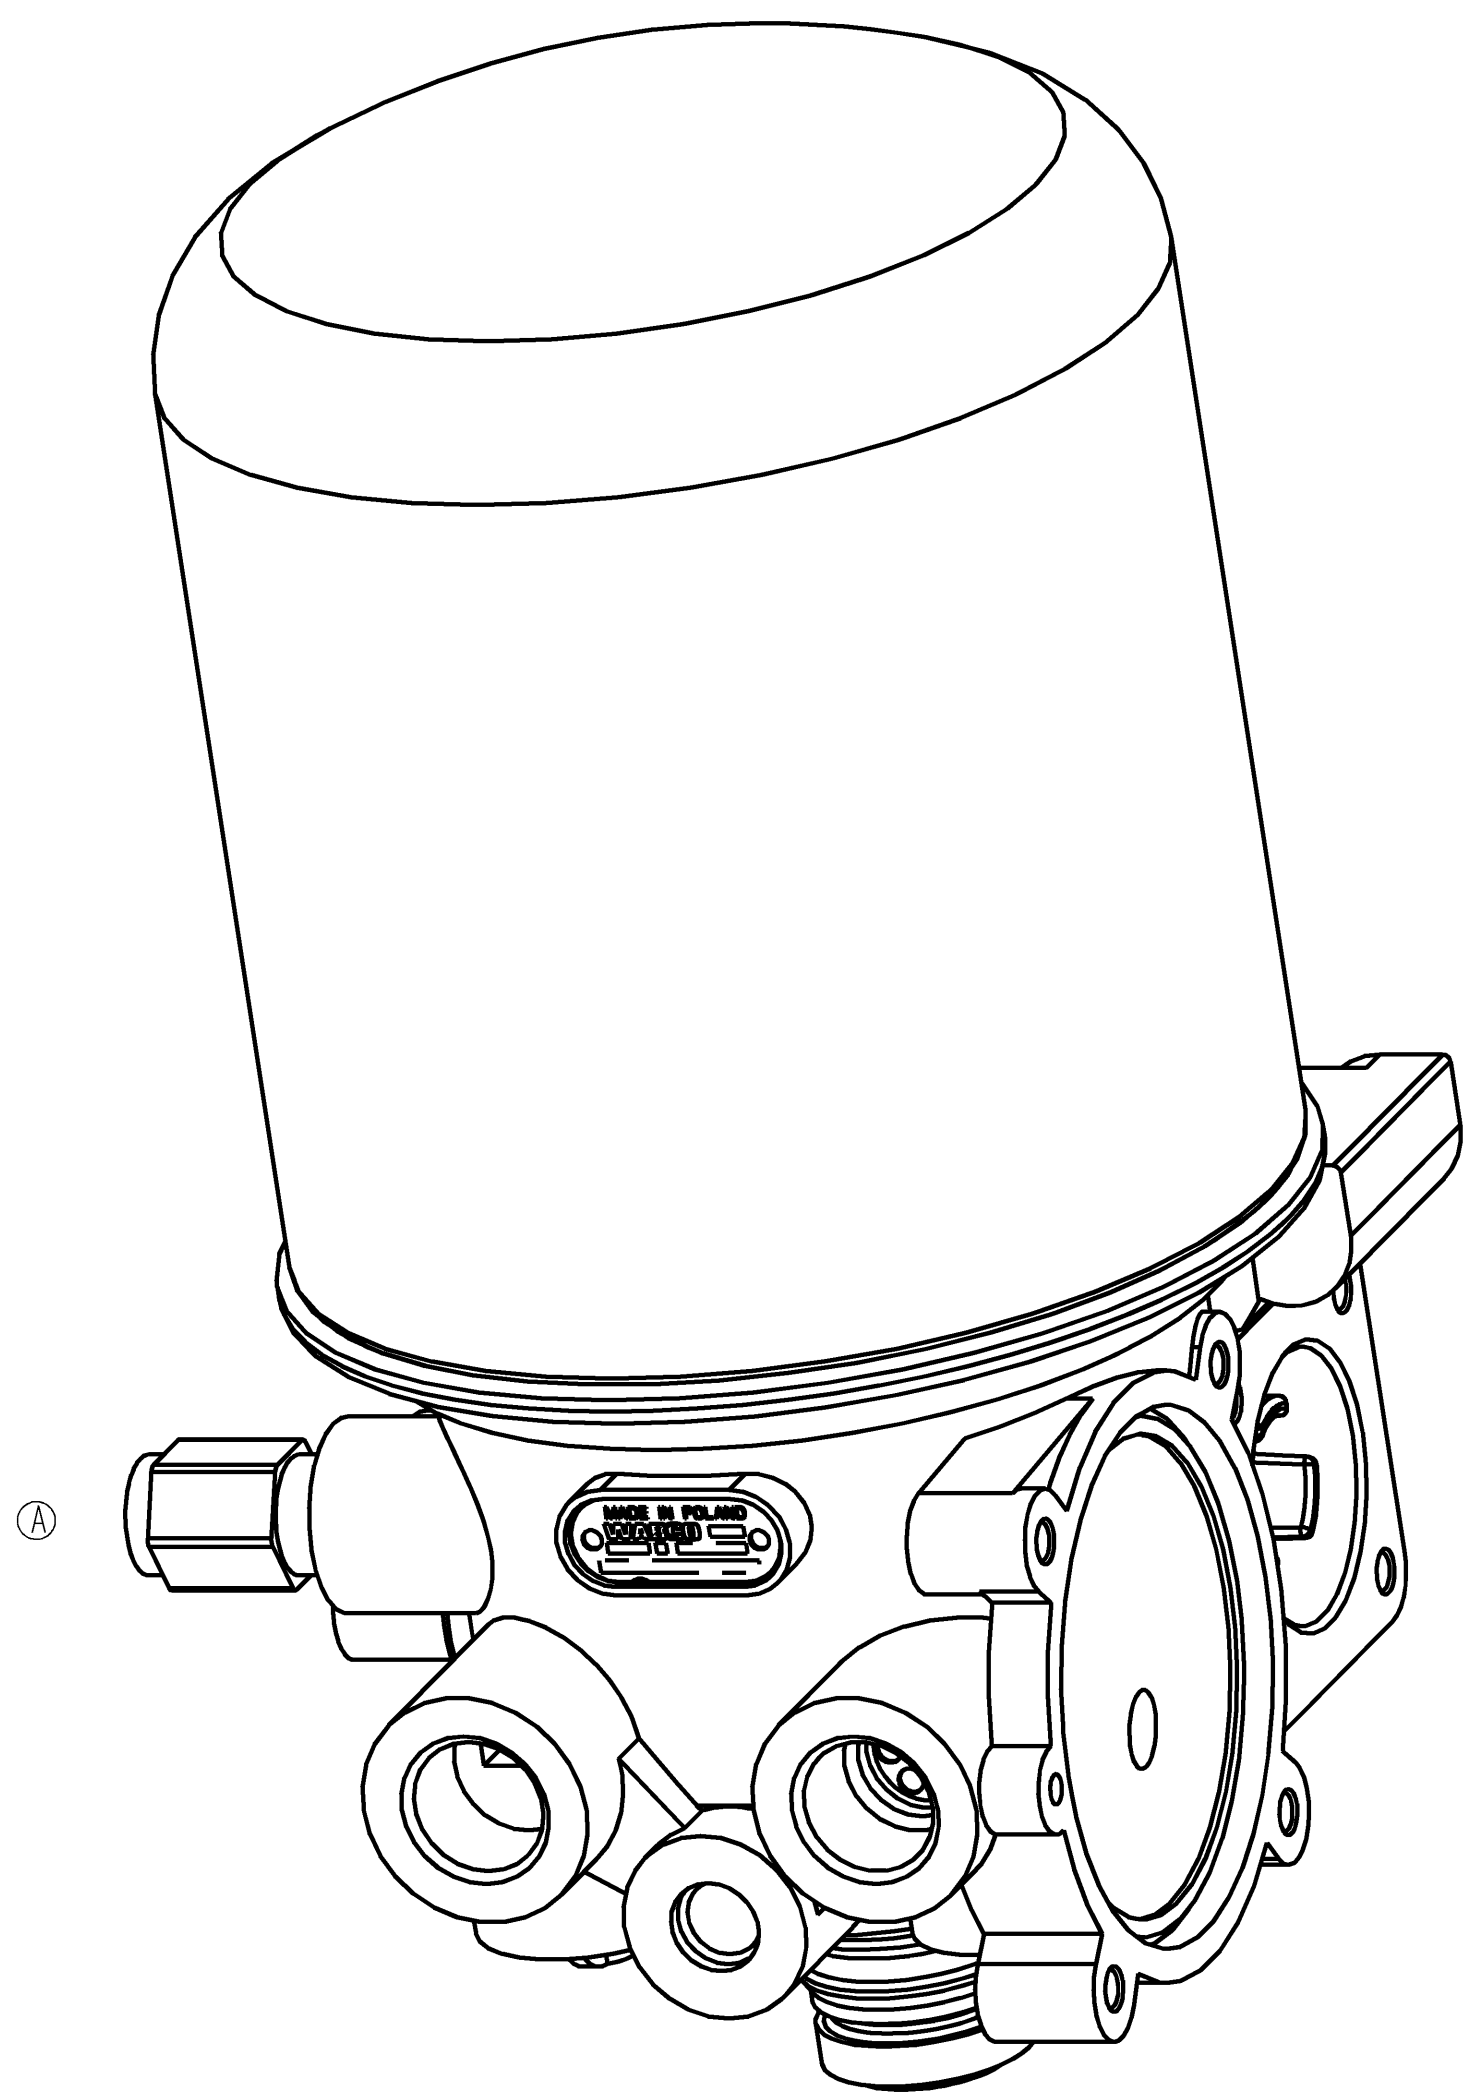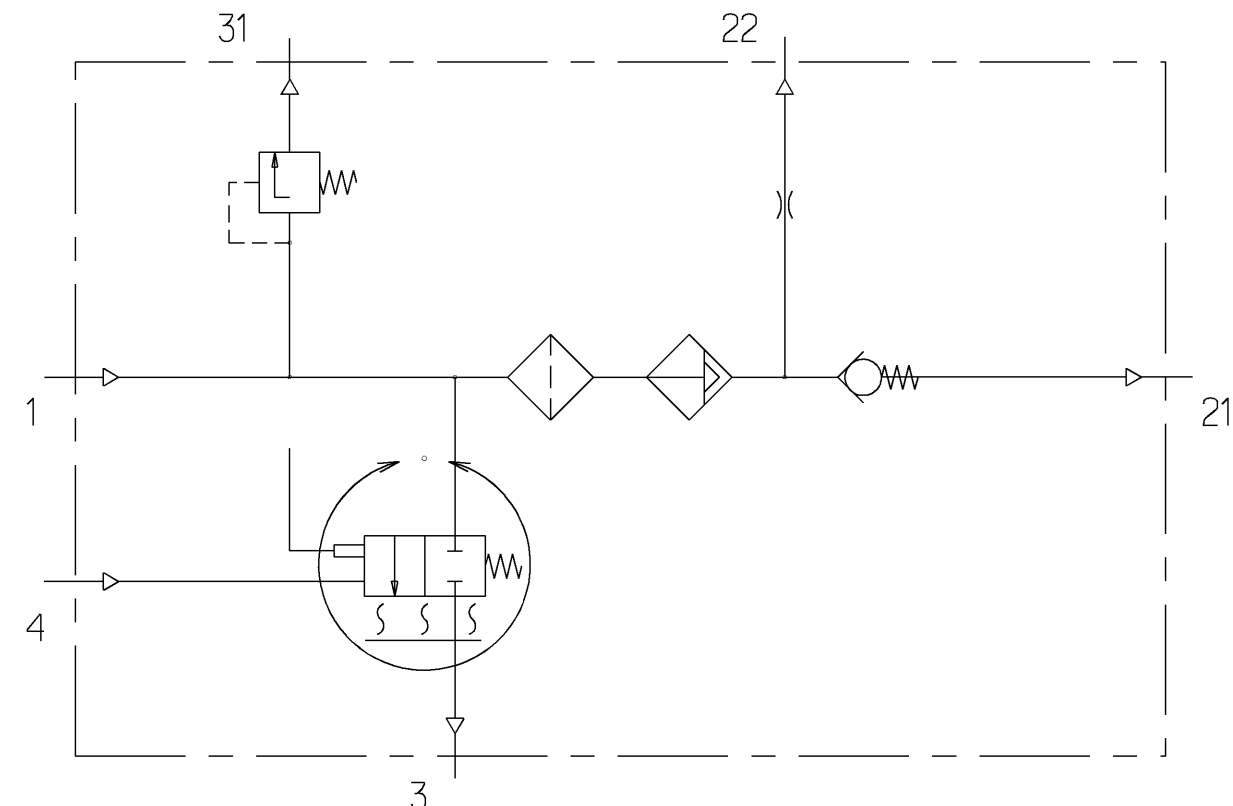

2206-D-1226	12V	432 421 032 0	432 421 033 0
RELIEF VALVE (1ea)	VOLTAGE	BASE DRYER	KIT NUMBER

THIRD ANGLE PROJECTION

General Specifications: JSD-3541-1, Size 150 WAGG LP		Copyright WABCO®			
Further Technical Data:		Date: _____ Signature: _____			
Doc. Code:		Sheet: _____ To: _____		SS1200UP with COALESCENT CARTRIDGE	
General Tolerances: 0.2/0.2		2019-08-02		Srinivasan/Prasad	
Range of Nominal Dimensions (± mm)		2019-08-02		Morchelli	
		Exigent			
Check 11	$\begin{matrix} \text{Range of Nominal Dimensions} \\ \pm 0.5 & \pm 1.0 & \pm 1.5 & \pm 2.0 & \pm 3.0 & \pm 4.0 & \pm 6.3 \end{matrix}$	$\begin{matrix} \text{Mass} & \text{Size} \\ \text{g} & \text{mm} \end{matrix}$		Material No. _____ Date of first issue: 2006-06-05	
Free	0.5 1.0 1.5 2.0	1:1		Date of change: _____ Code: Language: _____	
Free	2.0 3.0 4.0 6.3	432 421 033 0		653 EN 1/1	
Free	2.0 3.5 5.0 6.5	Size		Date of change: _____ Code: Language: _____	
Tapped holes etc.		A 0 CREO		ECU No. _____ Revision _____ 500876 Rev. A 3550-MW	
☒ Tolerance Class Applied: Unspecified				Inspection for: _____ _____	